

BLICKMAN

PRODUCT CATALOG

Your Single Source for Stainless Steel Medical Equipment



About Our Company

We are a medical equipment manufacturing company that has been providing the healthcare industry with groundbreaking stainless steel and chrome solutions since 1889. Offering the highest quality medical equipment and services to acute care hospitals, primary care offices and surgery centers across the nation, we strive for excellence and achieve greatness at reasonable and competitive rates.

Forged from over 125 years of experience in mastering stainless steel medical equipment, our innovative products are renowned for their durability and optimal performance. Pioneers in our industry, our team of professionals works with you to visualize, create and execute what you need with fully customizable solutions. We provide the best products and services in our class so that you can focus on what matters most: caring for patients. At Blickman, we are committed to delivering the tools you need to succeed with our full-service approach to manufacturing. For more information about what we can do for you or to request a quote, contact us today!

Contact Us

Phone: (800) 247-5070
info@blickman.com
www.blickman.com

Corporate Office

1099 Wall Street West
Suite 250A
Lyndhurst, NJ 07071

Headquarters

101 Motivation Drive
Lawrenceburg, TN 38464



Explore all we have to offer: www.blickman.com

Table of Contents

Ambulation Devices	4
Bassinets	15
Cabinets & Casework	20
Case Carts	44
Chairs	55
Decontamination Stations	59
Exam Stools	65
Foot Stools	73
Gowning Benches	80
Hampers	84
IV Stands/Irrigation Towers	91
Mayo Stands	105
MR Conditional Equipment	111
Scrub Sinks	123
Solution Stands/Kickbuckets/Receptacles	129
Surgical Utensils	134
Tables	139
Utility Carts	156
Warming Cabinets	163
Contact Us	172

BLICKMAN



Ambulation Devices

Increase mobility, support independence, and cut costs

Includes:


- Nezzie
- Nezzie Jr.
- Options & Accessories



THE BLICKMAN DIFFERENCE

- The Nezzie by Blickman was created by a thoracic surgeon to significantly improve patient ambulation.
- It holds most devices, monitors, oxygen tanks, and IV poles, thereby eliminating the need to transfer and carry each item individually during ambulation.
- Wrap around adjustable handle design accommodates individual patient size and contributes to patient safety and confidence during ambulation.
- Antimicrobial paint and the ability to be dedicated to one patient at a time improves infection control.
- It is specifically designed to reside bedside, requiring no more room than a standard IV pole and uses four casters to pivot 360° in tight spaces, such as bathrooms.

Key Product Features

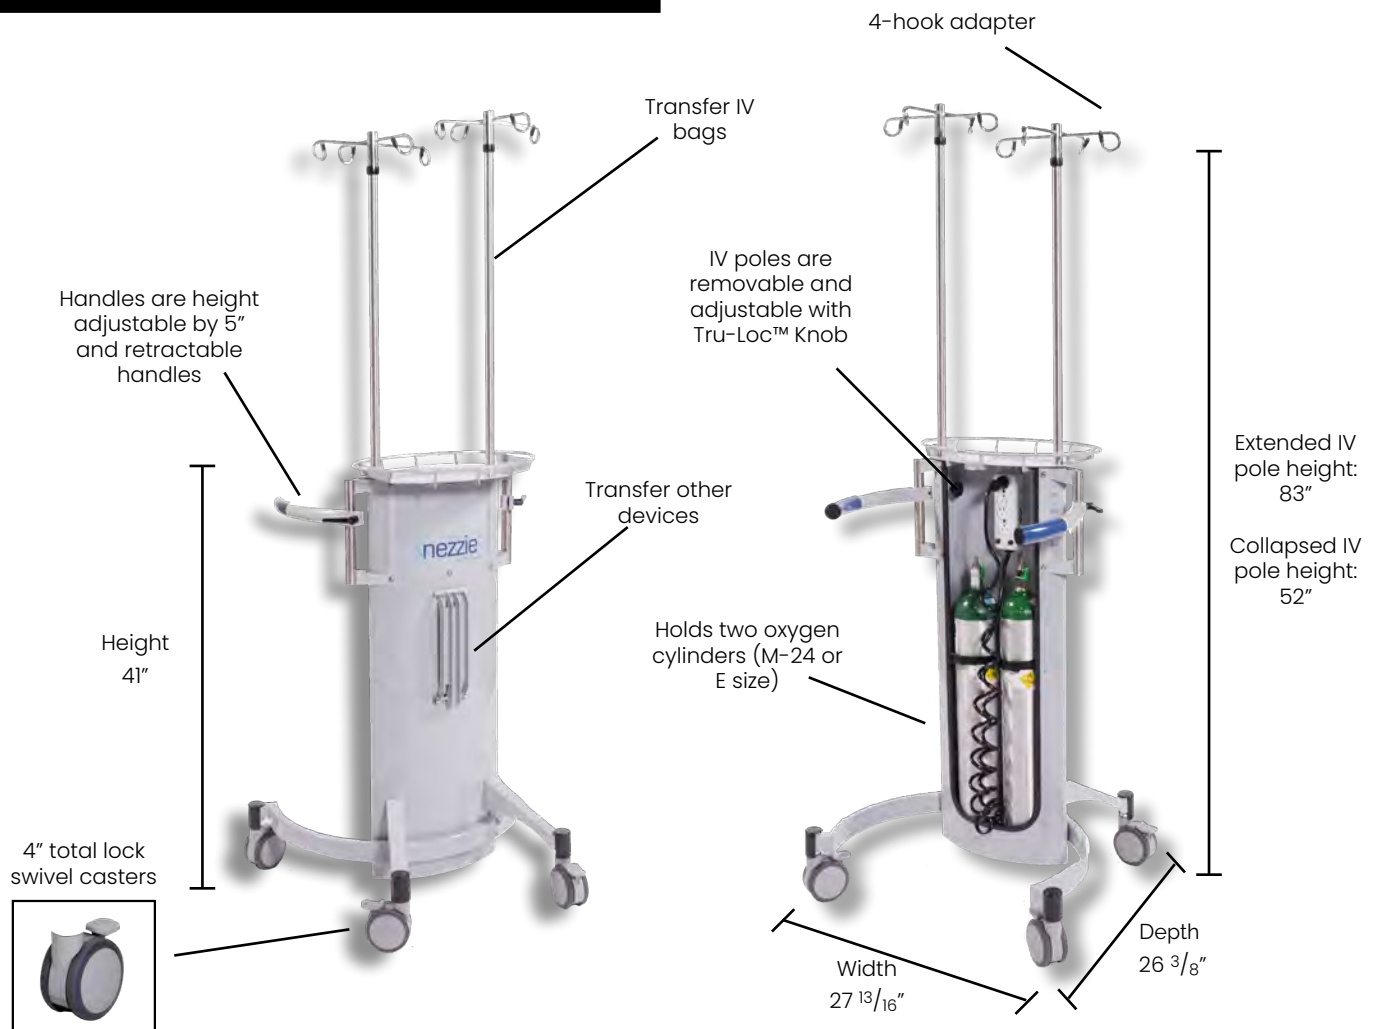

WHY CHOOSE NEZZIE?



FOR PATIENT:

- Improves patients' safety and satisfaction of care
- Improves patients' independence and sense of well being
- Reduces complications of immobility
- Lowers incidence of readmission due to hospital-acquired debility and deconditioning

FOR STAFF:

- Improves staff safety and satisfaction of care
- Less staff is required to assist with ambulation allowing for more one-on-one care

FOR DEPARTMENT:

- Increases department workflow and efficiency by freeing up nurses to do other duties
- Reduces costs

REDUCED COSTS

Annual savings in Labor Costs per Year for One Nezzie Calculated Below



365

Yearly
Ambulation
Hours per Patient

Hours

An average patient ambulates for 20 minutes three times a day, which is 1 hour a day or 365 hours per year of ambulation per patient.

2

Less



Staff Members

Number of Staff
Needed for 1 Patient
to Ambulate

On average, 3 staff members are needed for a patient. With the Nezzie, only 1 staff member is needed, freeing up 2 staff members.



730

Fewer




Worker Hours

Hours of
Ambulation
Assistance Per Year

For 3 staff, a total of 1,095 worker hours per year are used for ambulation. For one staff member, only 365 worker hours are used.

\$14,600

Saved



Cost of Ambulation
Assistance Per
Year

Considering \$20 is the average hourly rate for a nurses' aid, it would cost \$21,900 for 1,095 hours of labor from three staff members, as opposed to \$7,300 for 365 hours from one staff member.

STABILITY TEST

SET UP:

- Test was performed with IV poles overextended to 82"
- 10 lb. weight was attached to the top of each IV stand to simulate IV bags
- 20 lb. weight was placed close to the base of the device to simulate an oxygen tank

PERFORMED:

- The device was lifted 10° to check for stability
- At 10°, the device was checked for tip over test using a half inch hazard

RESULT:

- The device maintained its stability at a 10° angle
- The device did not roll over and/or tip over a 1/2" hazard at a 10° angle

*"Nezzie allowed me the freedom
to walk with confidence and security.
It made a big difference in my
recovery after my operation."*

***-Ray Drew
Cardiac Surgery Patient***

ULTIMATE LOAD TEST

SET UP:

- Test was set up with loads applied to locations on the Nezzie that would hold weight
- Locations included:
 - Top of the device, 1" from edge
 - Hanger, 2" - 3" from the end
 - Handles, 2" - 3" from the ends

PERFORMED:

- Force and deflection were recorded using a compression test machine

RESULT:

- The device maintained its stability at a 10° angle
- The device did not roll over and/or tip over a half inch hazard at a 10° angle.



PUSH AND PULL FORCE TEST

SET UP:

- Test was performed with increments of loads up to 200 lbs. on the tray shelf of the device

PERFORMED:

- Static and kinetic force for push and pull of the device were recorded using a force gauge

RESULT:



PUSH

Weight (lbs.)	Static (lbs.)	Kinetic (lbs.)
20	2.8	2.4
40	3.0	1.6
60	3.6	1.8
80	6.4	3.4
100	5.2	3.4
150	6.0	5.4
200	7.2	4.8

PULL

Weight (lbs.)	Static (lbs.)	Kinetic (lbs.)
20	3.6	0.8
50	4.4	1.6
100	4.6	2.4
150	5.4	2.6
200	5.2	4.4



Ambulation Devices

Nezzie Devices

Our Nezzie Carries and Manages:

- ✓ Two Oxygen tanks (delivery & suction)
- ✓ Multiple IV fluid delivery systems
- ✓ Oxygen saturation monitor
- ✓ Additional drainage collection devices for various specialties
- ✓ EKG monitor
- ✓ Chest tube collection canisters
- ✓ Urinary catheter bags
- ✓ Nezzie Jr. for pediatric use



**Scan to see Nezzie
informational video on
Blickman website**



NEZZIE

#NZ9000

DIMENSIONS AND WEIGHT:

27 ¹³/₁₆" (width) x 26 ³/₈" (depth)
Height of IV Poles: 52" - 83"
Height of Handles: 33 ³/₈" - 38 ⁷/₈"



NEZZIE JR.

#NZ9100

DIMENSIONS AND WEIGHT:

27 ¹³/₁₆" (width) x 26 ³/₈" (depth)
Height of IV Poles: 52" - 72"
Height of Handles: 21 ¹/₄" - 26 ³/₄"

Name	Nezzie	Nezzie Jr.
Model #	NZ9000	NZ9100
Item #	0429000000	0429100000
Shipping Weight	77 lbs.	67 lbs.

Custom Powder Coated Colors Available Upon Request

Please email us at info@blickman.com



Ambulation Devices

Holders for External O2 Tanks

The Nezzie is a compact design to maneuver in tight spaces, however, for longer ambulation, a patient may require additional oxygen tanks that are easier to access in order to switch out the old for new. For these situations, increase your Nezzie's capacity from two oxygen tanks to four by ordering a tank holder kit for the Nezzie or a separate tank holder and accessory clamp for the Nezzie Jr.



O2 tanks
not included
with holder kit or
accessories.



TANK HOLDER KIT FOR STANDARD NEZZIE

The tank holder kit includes two small brackets, two small slides, two 1380 clamps and two 1386 tank holders and necessary hardware. This allows for two oxygen tanks outside the body of the Nezzie in addition to the two internal oxygen tanks inside the body of the Nezzie.

Part #	Description	Shipping Weight
0499000200	Oxygen Tank Holder Kit for Standard Nezzie	19 lbs.

ACCESSORIES TO ATTACH EXTERNAL O2 TANKS TO THE NEZZIE JR.

External oxygen tanks can be attached to the Nezzie Jr. using an accessory clamp and a tank holder. Attach the tank holder accessory to the extended handle slides on the side of the Nezzie Jr. using the accessory clamp.



Accessory Clamp



Tank holder

Part #	Description	Shipping Weight
7801380000	Accessory Clamp	4 lbs.
7801386000	Tank Holder	5 lbs.

Custom Powder Coated Colors Available Upon Request

Please email us at info@blickman.com



Ambulation Devices

Options & Accessories

OPTIONS

IV Hook Configurations



Nezzie	2 Hooks	4 Hooks	6 Hooks	8 (Rake) Hooks
Part #	780063700L	780063800L	780066900L	7802808750
Shipping Weight	2 lbs.	2 lbs.	2 lbs.	5 lbs.

ACCESSORIES



Power Strip



Tray

Part #	Description	Shipping Weight
9170232104	Medical Grade Power Strip	3 lbs.
0499000102	Large Stainless Steel Tray (16" x 21")	11 lbs.
0499000101	Small Stainless Steel Tray (16" x 12")	8 lbs.

Custom Powder Coated Colors Available Upon Request

Please email us at info@blickman.com



Ambulation Devices

Construction Specifications

Construction Specifications

Universal Dimensions	Width: 27 13/16" x Depth: 26 3/8" Nezzie Height: 52" - 83" Nezzie Jr. Height: 52" - 72"
Materials/ Gauge	Main Frame: Powder Coated Cold Roll Steel, 18 GA Base: Powder Coated Steel Tube Base, 11 GA IV Pole: 304 stainless steel, 7/8" diameter, 18GA
Welding	All welding by heliarc method and exposed welds are ground smooth
Finish	Antimicrobial powder coated steel and exposed stainless steel Exposed surfaces are free from pit marks, welded seams and are polished with #4 polish to a satin finish
Electrical	4 hospital grade receptacles and hospital grade plug Three foot coiled cord (extends to 10 foot), 120V AC, 50/60Hz, 15A Tested to comply UL 1363A specifications
Casters	4" twin wheel, antimicrobial precision ball bearing, swivel casters with brakes, which allow for 360 degree pivoting in tight spaces
Notes	<ul style="list-style-type: none">• Mobile, versatile, low profile, compact• Eliminates tipping and meets ISO 11199-3 standards for safety• Consolidates most devices

Shipping Information

All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

BLICKMAN



Bassinets

Transport infants safely and comfortably

Includes:


- Bassinet Kits
- Bassinet Frames
- Basket & Mattress



THE BLICKMAN DIFFERENCE

- Our bassinets are renowned for their reliable 304 stainless steel, welded construction, durability and optimal performance which has made them the preferred choice among maternity nurses for decades.
- Our inverted "U-frame" bassinet design provides a stable and comfortable resting place for newborns. Our standard 4" ball bearing swivel casters, with two brakes, ensure safe transport.
- We offer various storage choices such as shelves, drawers and cabinets. Cabinets can be closed for more security or open for easier access.
- Our clear acrylic infant basket includes a cardholder for baby identification and rests in specially formed support rods so it can be set in the flat or Trendelenburg position.

Key Product Features

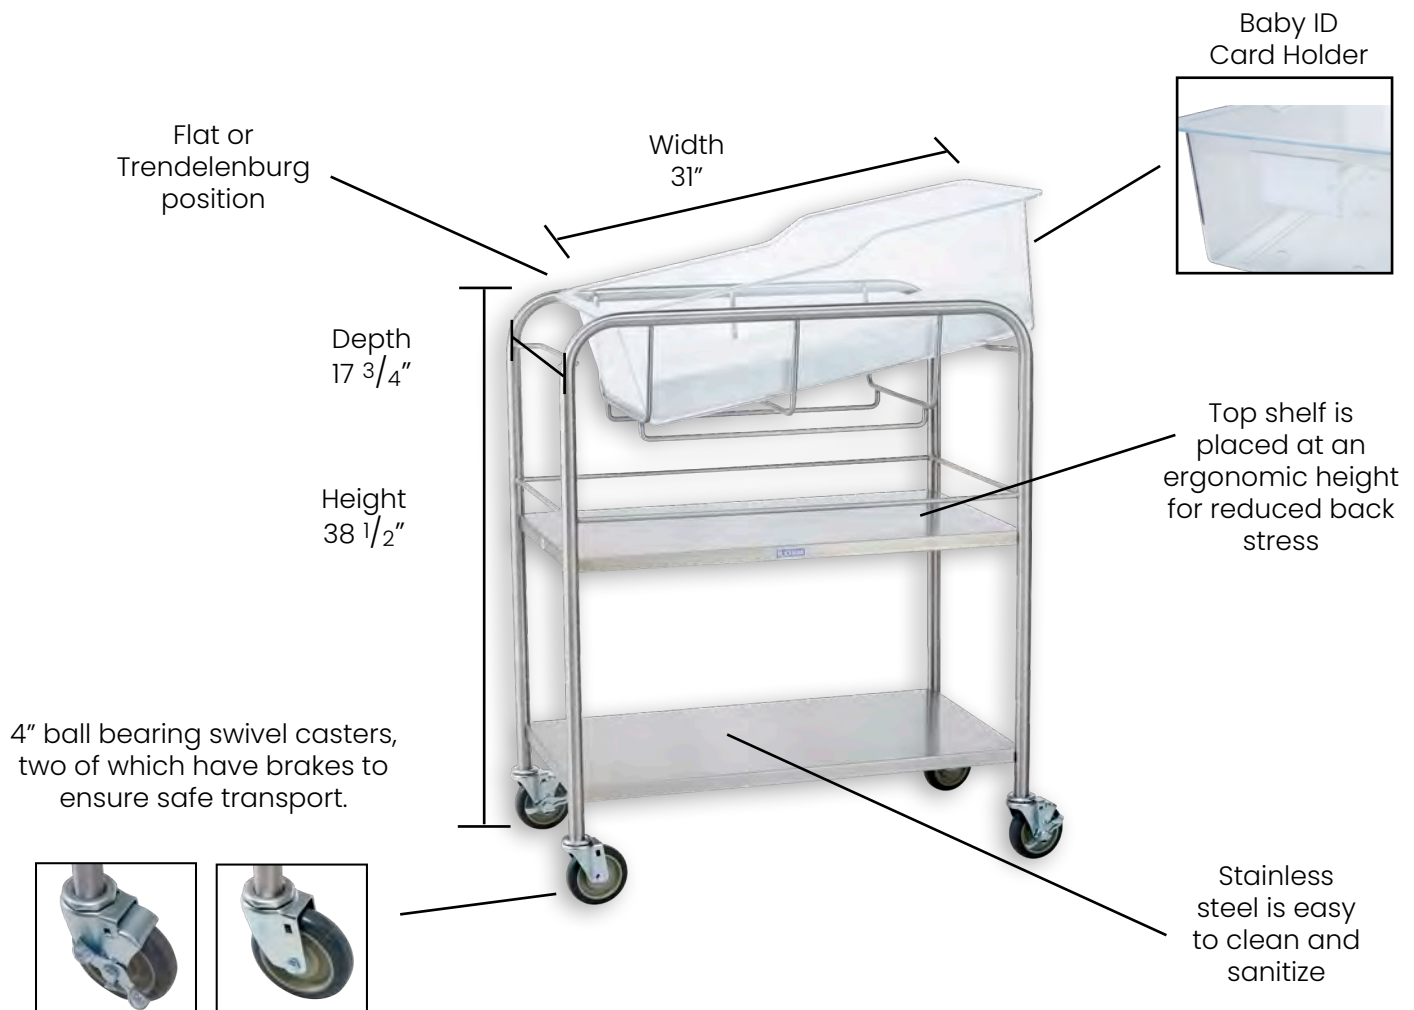

Bassinets

Bassinet Kits

We offer bassinet kits so you can get everything you need in one order. Our bassinet kits include:

- ✓ The stainless steel bassinet frame of your choosing
- ✓ The acrylic basket
- ✓ The foam mattress pad



**Now
Included**

BASSINET KITS

All of our bassinets are the same dimensions:

Width: 31" x Height: 41 1/2" x Depth: 17 3/4"



Description:

- Upper shelf has four sided guardrail to protect supplies
- Two shelves are 8" and 23" from the floor
- Shelf dimensions (WxHxD): 31" x 17 3/4"

Description:

- Storage drawer that is counter weighted for stability
- One shelf, 8" from the floor
- Drawer inside dimensions (WxHxD): 19 3/4" x 6 1/2" x 13 7/8"

Description:

- Two 17" deep storage compartments with doors
- Right side has removable shelf
- Cabinet inside dimensions (WxHxD): 29" x 13 3/4" x 15 7/8"

Description:

- Two open 17" deep storage compartments
- Right side includes non-removable shelf
- Cabinet inside dimensions (WxHxD): 29" x 13 3/4" x 16 5/8"

Name	Bassinet Kit with Open Shelves	Bassinet Kit with Drawer	Bassinet Kit with Closed Cabinet	Bassinet Kit with Open Cabinet
Model #	8044SS-KIT	8047SS-KIT	8048SS-KIT	8049SS-KIT
Item #	1118044KIT	1118047KIT	1118048KIT	1118049KIT
Shipping Weight	69 lbs.	98 lbs.	98 lbs.	77 lbs.

Custom Designs Available Upon Request

Please email us at info@blickman.com

Bassinets

Parts Ordered Separately

BASSINETS

All of our Bassinets are the same dimensions:

Width: 31" x Height: 38 1/2" x Depth: 17 3/4"



Name	Bassinet with Open Shelves	Bassinet with Drawer	Bassinet with Closed Cabinet	Bassinet with Open Cabinet
Model #	8044SS	8047SS	8048SS	8049SS
Item #	1118044000	1118047000	1118048000	1118049000
Ship Weight	53 lbs.	83 lbs.	82 lbs.	61 lbs.

ACCESSORIES



Basket

Dimensions: 31 1/8" x 9 7/8" x 16 1/8"

Seamless, clear acrylic bassinet basket with cardholder for easy identification



Mattress

Dimensions: 26" x 2" x 12 3/4"

2" thick foam padding with stap check cover. Flame retardant

Name	Basket	Mattress
Model #	3070P	3069MP
Item #	9841307001	8441306901
Ship Weight	12 lbs.	3 lbs.

Custom Designs Available Upon Request

Please email us at info@blickman.com



Bassinets

Construction Specifications

Construction Specifications

Universal Dimensions	Bassinets: Width: 31" x Height: 38 1/2" x Depth: 17 3/4" Bassinet Kits: Width: 31" x Height: 41 1/2" x Depth: 17 3/4"
Materials	304 stainless steel
Gauge	Legs: 16GA Shelves: 18 GA Body Parts and Removable Inside Shelves: 20GA
Welding	All welding by heliarc method and exposed welds are ground smooth
Finish	Exposed surfaces are free from pit marks, weld seams, scale and are polished with #4 polish to a satin finish
Casters	4" ball bearing, swivel casters, two with brakes
Notes	<ul style="list-style-type: none">• All models utilize specially formed support rods so basket can be set in the flat or Trendelenburg position• Infant basket and mattress pad can be sold separately

Shipping Information

All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

Custom Designs Available Upon Request
Please email us at info@blickman.com

BLICKMAN



Cabinets & Casework

Customizable, secure, and organized

Includes:

- Freestanding Cabinets
- Customizable Casework
- Sinks and Countertops
- Console Cabinets
- Accessories and Options




THE BLICKMAN DIFFERENCE

Freestanding Cabinets

- Our stainless steel cabinets are constructed with a seamless welded face preventing dirt collection while providing long lasting durability through unparalleled strength and corrosion resistance.
- Our freestanding cabinets rest on four legs with glides or can be mobilized on casters.
- Add a sloped top to prevent dirt collection to create a sterile environment.
- Kay and Kennedy cabinets feature two separate sections with unlocked or locked compartments.
- Paul and Walter cabinets provide maximum storage room for large equipment.

Key Product Features

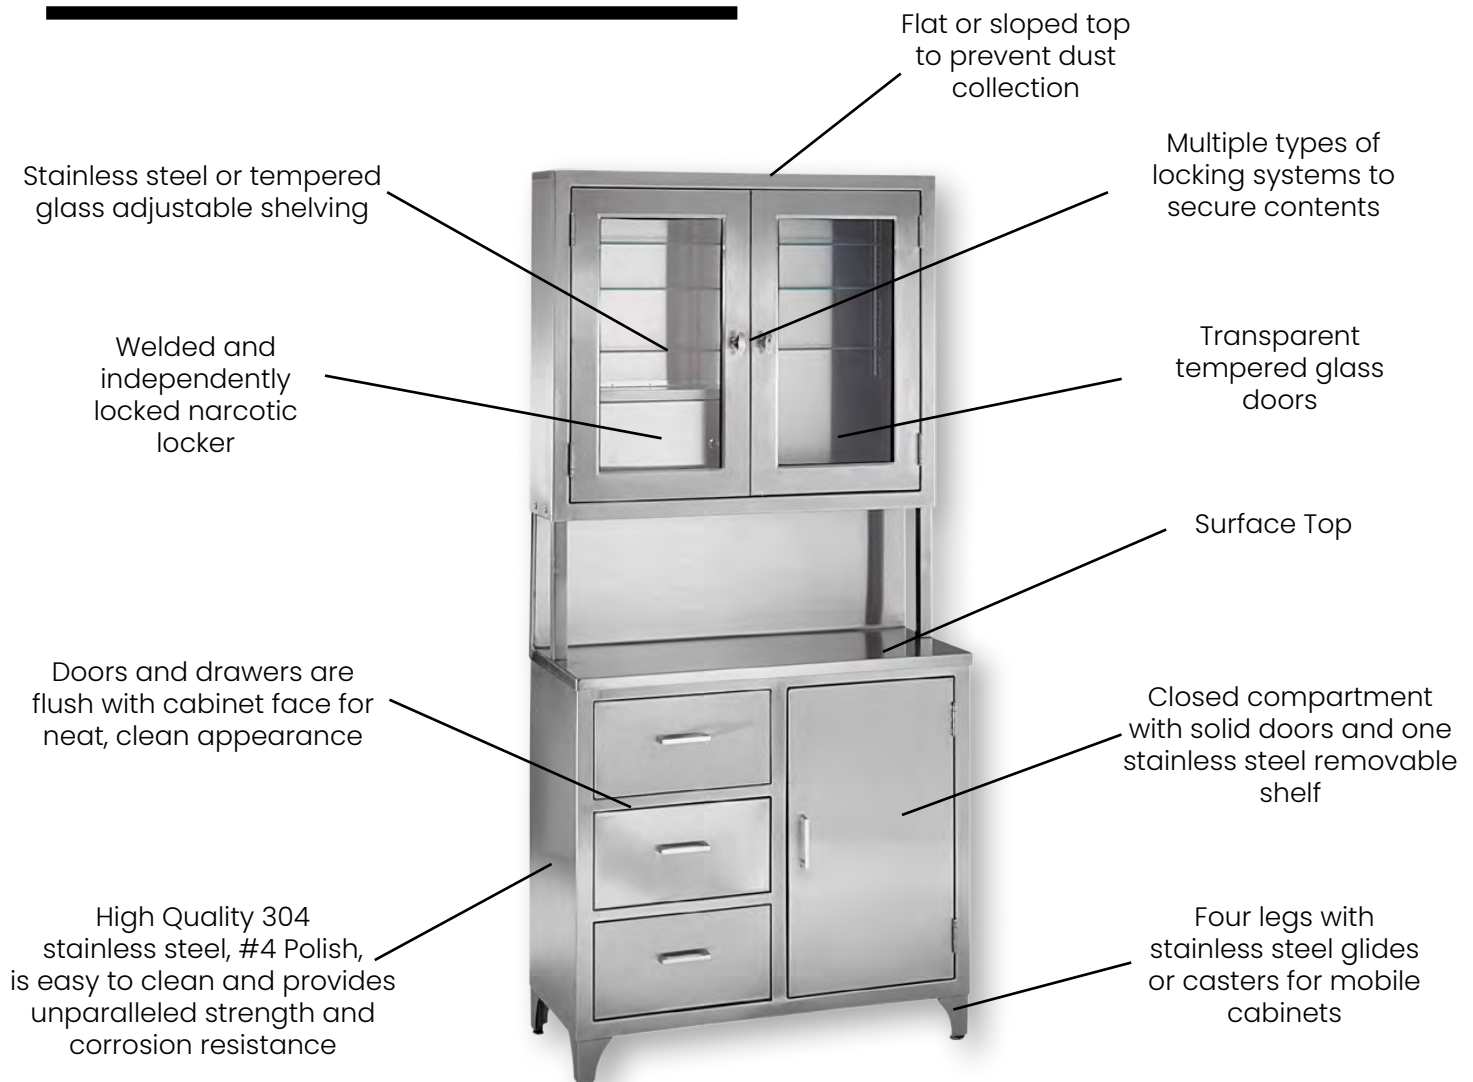

Cabinets

Freestanding

FREESTANDING

Description: Our Kay and Kennedy freestanding cabinets feature separate upper and lower sections. The upper sections of these cabinets are locked, transparent compartments for easily viewing and securing contents. The Kennedy cabinet includes an independently locked and welded narcotic locker.



Kay Cabinet

Upper section: Consists of a locked 29 $\frac{3}{4}$ " x 31 $\frac{3}{8}$ " x 15" compartment with a glass door and three removable glass shelves

Lower section: Consists of a 29 $\frac{3}{4}$ " x 20 $\frac{1}{2}$ " x 15" compartment with a stainless steel door and one stainless steel shelf



Kennedy Cabinet

Upper Section: 8" deep and contains a welded and independently locked narcotic locker

Lower Section: 16" deep and contains three 7" deep drawers and one 15" deep compartment

Name	Kay	Kennedy
Dimensions (WxHxD)	30" x 58" x 16"	36" x 76 $\frac{1}{2}$ " x 16"
Model #	7953SS	7956SS
Item #	1517953000	1527956000
Shipping Weight	219 lbs.	291 lbs.

Options: 2 "Casters, stainless steel shelves for upper cabinets, sloping top, all stainless steel doors

Custom Designs Available Upon Request
Please email us at info@blickman.com

Cabinets

Freestanding

FREESTANDING

Description: Our Paul and Walter cabinets are double door freestanding cabinets. They each come standard with two glass locked doors for securing contents. Our Walter cabinet is ideal for storing large instruments on its back pegboard, while our Paul cabinet includes shelving for storing lots of instruments and supplies. They are both 16" deep and 76" tall on gliders. They are 79 1/4" tall on casters. Choose from two standard width sizes: 35 5/8" and 47 5/8".



Walter Cabinet

This cabinet is great for storing endoscopy equipment or other large instruments on its pegboard



Paul Cabinet

This cabinet provides maximum shelving storage for instruments and supplies. Glass shelves are adjustable every 1/2"

Name	Walter		Paul	
Width	35 5/8"W	47 5/8"W	35 5/8"W	47 5/8"W
Model #	7959SS	7960SS	7970SS	7971SS
Item #	1537959000	1537960000	1537970000	1537971000
Shipping Weight	269 lbs.	310 lbs.	330 lbs.	400 lbs.

Options: Glides or casters, recessing, flat top, stainless steel shelves (Paul Cabinet), all stainless steel doors

Custom Designs Available Upon Request

Please email us at info@blickman.com

Cabinets

FREESTANDING
Options &
Accessories

FOOT OPTIONS



Locking Casters



Casters



Gliders

ACCESSORIES



Electronic Locking Systems,
available for most of our cabinets



Additional Shelves, your choice of
stainless steel or glass



Sloped top (see order details
below)

Model #	Item #	Description	Shipping Weight
ST-3016	4503516300	Sloped Top for Kay (30" x 6" x 16")	35 lbs.
ST-3608	4503536080	Sloped Top for Kennedy (36" x 6" x 8")	37 lbs.
ST-3516	4503516350	Sloped Top for Walter or Paul (slim) (35 5/8" x 6" x 16")	43 lbs.
ST-4716	4503516470	Sloped Top for Walter or Paul (wide) (47 5/8" x 6" x 16")	54 lbs.

Construction Specifications

Standard Dimensions	All Freestanding Cabinets: 16" deep
Materials	304 stainless steel 1/4" clear tempered sheet glass
Gauge	Body, Sloped Top, Drawers, and Shelf Inserts: 18GA; Legs: 12GA Glass Doors (Front and Back): 18GA Solid Doors (Front): 18GA; Solid Doors (Back): 20GA
Welding	All welding by heliarc method and exposed welds are ground smooth
Finish	Exposed surfaces are free from pit marks, weld seams, scale and are polished with #4 polish to a satin finish
Casters	2" or 3" ball bearing, swivel casters with brakes
Notes	<ul style="list-style-type: none">• Kay: A counter weight is fastened underneath at bottom rear of cabinet for doors in open position. Upper door fitted with lock handle and three way latching device engaging at top.• Kennedy: Right hand door equipped with a locking knob and three way latching. Left hand door with dummy knob and roller latch. An independently locked narcotic cabinet, 13 1/4" x 5" x 7 3/4" with double walled door is welded to the bottom, back, and side of the compartment.• Paul & Walter: A counter weight is fastened underneath at bottom rear of cabinet for doors in open position. Right hand door is fitted with a locking handle and three point latching, and the left door has a dummy knob and spring loaded nylon roller catches.

Shipping Information


All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

THE BLICKMAN DIFFERENCE

Casework

- Need more flexibility in today's space squeezed environment? We provide you with casework that can be assembled together and modified to fit your custom dimensions.
- Whether it is renovation or new construction, we will be happy to work with your facility's personnel, architects, contractors, and/or equipment planners to meet your custom requirements.
- Utilizing 3D Design Software REVIT®, we have developed a library of our standard products which is available at no charge to your company. Our 3D library will save you considerable time and money when working on projects that require stainless steel cabinets and equipment.
- Each product line of cabinets (console cabinets, high cabinets, base cabinets, and wall cabinets) have their individual properties identified for easy customization: (cubic feet, weight, "X", "Y" and "Z" dimensions, voltage, etc.).

Key Product Features

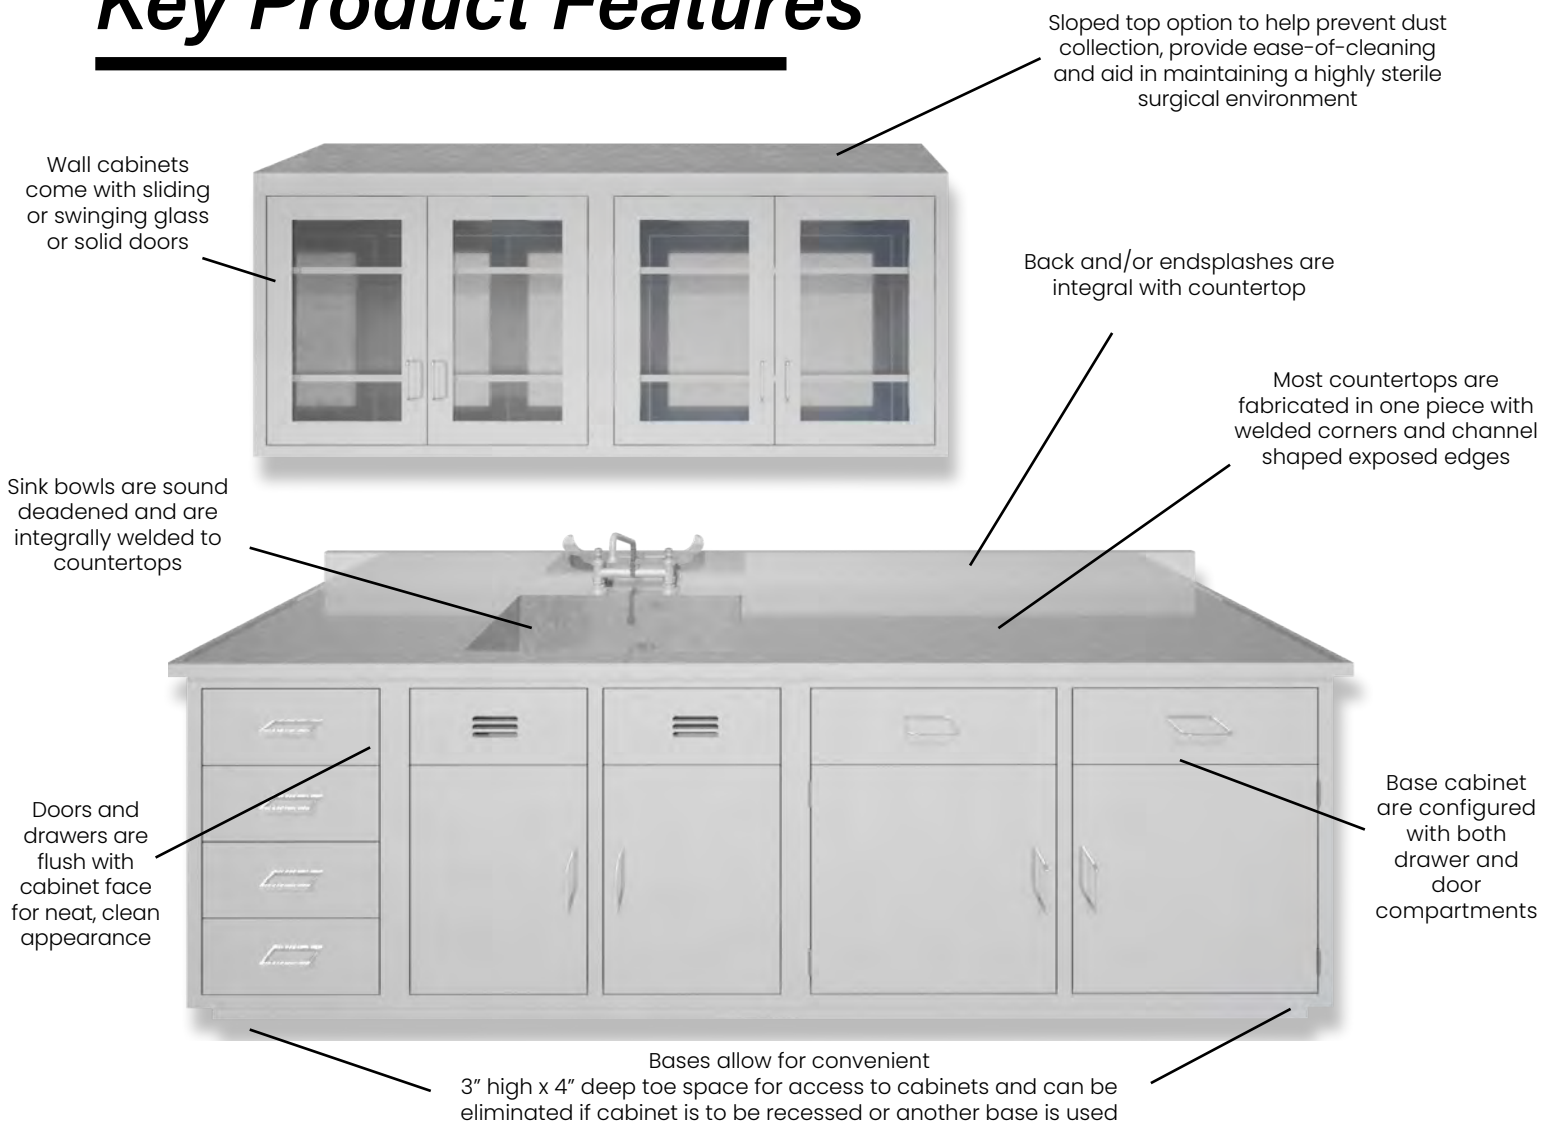

Cabinets

Customizable
Casework

HIGH CABINETS

Description: Our stainless steel high cabinets are designed to stand alone or fit within a framework of cabinets. They are constructed as floor and wall supported individual cases with finished sides. They each contain five adjustable stainless steel shelves, with the option of glass shelves and additional shelves. They are all 84" tall and 18" deep cabinets. Width varies and other alternative dimensions are available.


Customize the widths and depths of these models to your room.

Common Dimensions:

Single Door: 21 3/4" and 24 3/4" W

Double Door: 29", 41", and 47"W

Alternative Depth: 23"D

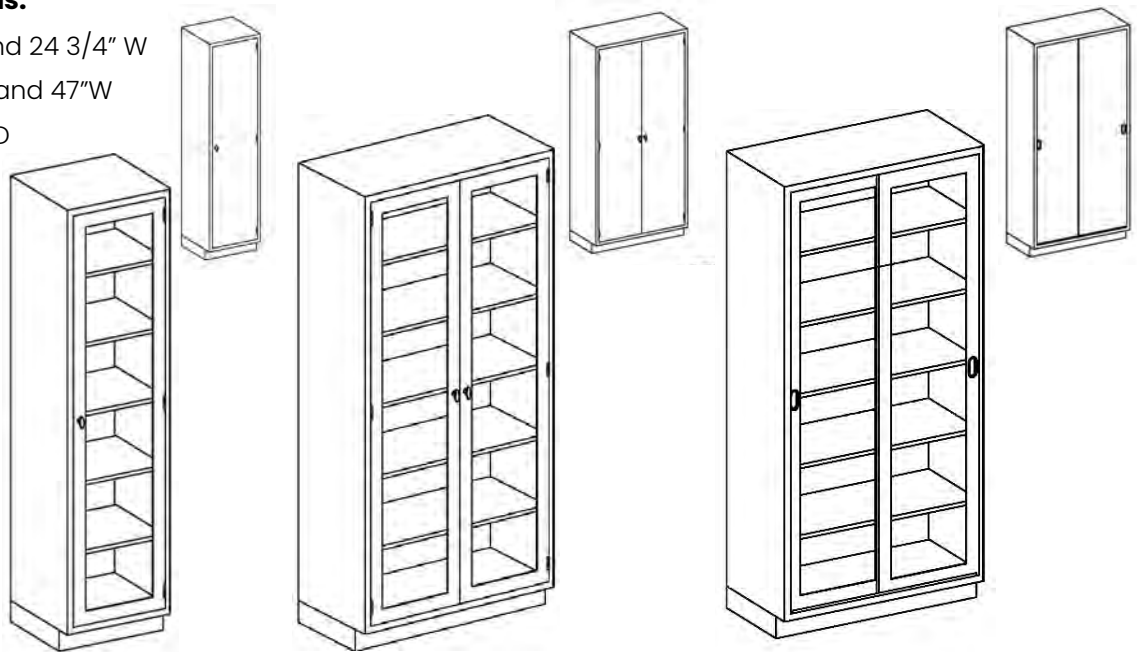

Name	Single Door	Double Door	Double Sliding Doors
Glass Doors			
Dimensions (WxHxD)	18 3/4" x 84" x 18"	35" x 84" x 18"	35" x 84" x 18"
Model #	K18HAS	L35HAS	M35HAS
Item #	2030518000	203053500	2030635000
Shipping Weight	215 lbs.	310 lbs.	325 lbs.
Solid Stainless Steel Doors			
Dimensions (WxHxD)	18 3/4" x 84" x 18"	35" x 84" x 18"	35" x 84" x 18"
Model #	H18HAS	I35HAS	J35HAS
Item #	2030418000	2030435000	2030535180
Shipping Weight	230 lbs.	300 lbs.	347 lbs.

Options: Sloped top, glass shelves, additional shelves

Custom Designs Available Upon Request

Please email us at info@blickman.com

WALL CABINETS

Description: Our stainless steel wall cabinets are designed to stand alone with finished sides or to fit within a framework of cabinets. They are constructed for flush face wall surfaces with a recessed back panel for uneven wall surfaces. Each cabinet comes with two 1/2" adjustable stainless steel shelves. Choose from swinging or sliding doors made of either solid stainless steel or glass. Our wall cabinets are all 30" tall and 13" deep. Width varies and other alternative dimensions are available.


Customize the widths and heights of these models to your room.

Common Dimensions:

Single Door: 18 3/4", 21 3/4", and 24 3/4" W

Double Door: 29", 35" 41", and 47"W

Alternative Heights: 36" and 48"H

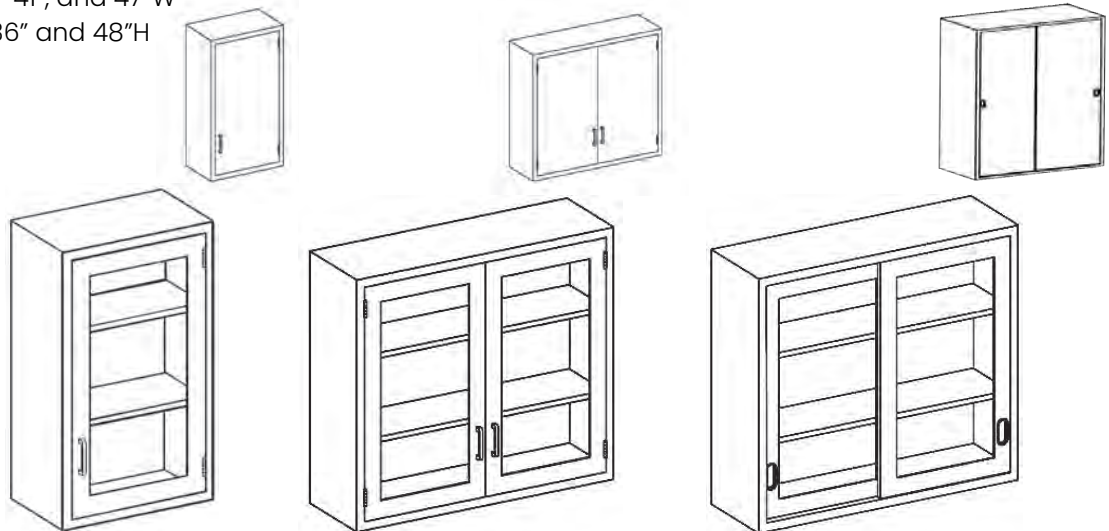

Name	Single Door	Double Door	Sliding Doors
		Glass Doors	
Dimensions (WxHxD)	18 3/4" x 30" x 13"	35" x 30" x 13"	35" x 30" x 13"
Model #	D18LS	E35LS	F35LS
Item #	2020318000	2020335000	2023035000
Shipping Weight	95 lbs.	145 lbs.	135 lbs.
		Solid Stainless Steel Doors	
Dimensions (WxHxD)	18 3/4" x 30" x 13"	35" x 30" x 13"	35" x 30" x 13"
Model #	A18LS	B35LS	C35LS
Item #	2020218000	2020235000	2023135000
Shipping Weight	90 lbs.	141 lbs.	130 lbs.

Options: Sloped top, glass shelves, additional shelves

Custom Designs Available Upon Request

Please email us at info@blickman.com

Cabinets

Customizable
Casework


OPEN WALL SHELVES

Description: Our stainless steel open wall cabinet is designed to stand alone with finished sides or fit within a framework of cabinets and comes with two adjustable stainless steel shelves. Alternatively, we offer a wall shelf that can be placed anywhere along a wall.

Common Dimensions:

Wall Cabinet Widths: All Single and Double Width Sizes
Heights: 36" and 48"

Wall Shelf Widths: 48", 60", and 72", Depths: 16"




Name	Open Wall Cabinet		Wall Shelf	
Width	35" W	47" W	36" W	84" W
Dimensions (WxHxD)	35" x 30" x 13"	47" x 30" x 13"	36" x 12"	84" x 12"
Model #	G35LS	G47LS	WS3612	WS8412
Item #	2020435000	202044700	1813612000	1818412000
Shipping Weight	75 lbs.	142 lbs.	26 lbs.	40 lbs.

OPEN BASE CABINETS

Description: Our stainless steel open base cabinets offer open shelving to fit within a framework of cabinets or stand alone with finished sides. They are constructed for flush face wall surfaces and come with two adjustable stainless steel shelves. Our open base cabinets are all 22" deep and 35 3/4" high and come in a variety of width sizes.

Other Commonly Ordered Single Width Sizes: 21 1/8" W

Other Commonly Ordered Double Width Sizes: 29"W and 41"W



Name	Single Width		Double Width	
Width	18 1/8" W	24 1/8" W	35" W	47" W
Model #	AJ18HS	AJ24HS	AJ35HS	AJ47HS
Item #	2012518000	2012524000	2012535000	2012547000
Shipping Weight	102 lbs.	122 lbs.	152 lbs.	170 lbs.

Custom Designs Available Upon Request

Please email us at info@blickman.com

SINGLE BASE CABINETS

Description: Our stainless steel single width base cabinets come in five different configurations and are designed to stand alone with finished sides or to fit within a framework of cabinets. They are all 35 3/4" tall and 22" deep, and come in two width sizes, 18 1/8" and 24 1/8". **Other Commonly Ordered Single Width Sizes:** 21-1/8"W



**-AA-
Door**



**-AB-
Door, Drawer**



**-AC-
Door, Vent (Sink)**

18 1/8" Wide			
Model #	AA18HS	AB18HS	AC18HS
Item #	2012118000	2012218000	2012218001
Shipping Weight	80 lbs.	125 lbs.	107 lbs.
24 1/8" Wide			
Model #	AA24HS	AB24HS	AC24HS
Item #	2012224000	2012124000	2012224001
Shipping Weight	132 lbs.	147 lbs.	118 lbs.

Note: Cabinets without vents include one stainless steel shelf inside



**-AS-
3 Drawer**



**-AE-
4 Drawer**

18 1/8" Wide		
Model #	AS18HS	AE18HS
Item #	2012718000	2012318000
Shipping Weight	167 lbs.	174 lbs.
24 1/8" Wide		
Model #	AS24HS	AE24HS
Item #	2012724000	2012324000
Shipping Weight	183 lbs.	192 lbs.

Note: Cabinets without vents include one stainless steel shelf inside

Custom Designs Available Upon Request
Please email us at info@blickman.com

Cabinets

Customizable
Casework

DOUBLE BASE COMPARTMENT CABINETS

Description: Our stainless steel double base compartment cabinets come in seven different configurations and are designed to stand alone with finished sides or to fit within a framework of cabinets. They are all 35 3/4" tall and 22" deep, and come in two width sizes, 35" and 47".

Other Commonly Ordered Sizes: 29"W and 41"W



Name

**-DA-
Double Door**

**-DB-
Double Vent (Sink)**

**-DC-
Large Drawer**

**-DD-
Double Drawer**

35" Wide

Model #	DA35HS	DB35HS	DC35HS	DD35HS
Item #	2013235200	2013235000	2013235001	2013335000
Shipping Weight	161 lbs.	145 lbs.	200 lbs.	194 lbs.

47" Wide

Model #	DA47HS	DB47HS	DC47HS	DD47HS
Item #	2013247200	2013247000	2013247001	2013347000
Shipping Weight	205 lbs.	178 lbs.	235 lbs.	243 lbs.

Note: Cabinets without vents include one stainless steel shelf inside



Name

**-DG-
1 Door, 4 Drawer**

**-DJ-
1 Door, 8 Drawer**

**-DK-
1 Door, 5 Drawer**

35" Wide

Model #	DG35HS	DJ35HS	DK35HS
Item #	2013435000	2013535001	2013535000
Shipping Weight	180 lbs.	225 lbs.	257 lbs.

47" Wide

Model #	DG47HS	DJ47HS	DK47HS
Item #	2013447000	2013547001	2013547000
Shipping Weight	282 lbs.	280 lbs.	283 lbs.

Note: Cabinets without vents include one stainless steel shelf inside

Custom Designs Available Upon Request

Please email us at info@blickman.com

Cabinets

Customizable
Casework

DOUBLE BASE DRAWER CABINETS

Description: Our stainless steel double base drawer cabinets come in five different configurations and are designed to stand alone with finished sides or to fit within a framework of cabinets. They are all 35 3/4" tall and 22" deep, and come in two width sizes, 35" and 47".

Other Commonly Ordered Sizes: 29"W and 41"W



Name

**-DP-
4 Drawer**

**-DS-
5 Drawer**

35" Wide

Model #	DP35HS	DS35HS
Item #	2013735000	2013735001
Shipping Weight	238 lbs.	275 lbs.

47" Wide

Model #	DP47HS	DS47HS
Item #	2013647000	2013747001
Shipping Weight	276 lbs.	315 lbs.



Name

**-DT-
8 Drawer**

**-DR-
4 Small, 2 Large**

**-FC-
6 Small, 2 Large**

35" Wide

Model #	DT35HS	DR35HS	FC35HS
Item #	2013835000	2013635000	2013235002
Shipping Weight	287 lbs.	265 lbs.	275 lbs.

47" Wide

Model #	DT47HS	DR47HS	FC47HS
Item #	2013847000	2013747000	2013247002
Shipping Weight	324 lbs.	310 lbs.	323 lbs.

Custom Designs Available Upon Request

Please email us at info@blickman.com

Cabinets

Customizable
Casework

SINKS AND COUNTERTOPS

Please email us at info@blickman.com

Sink bowls come with moisture proof, sound-deadening mastic and are compatible with select base cabinets

Optional back/endsplashes (4" high) to protect wall surfaces

Counter top extends 1" past the front and past both sides of the base cabinet dimensions

Counter top is 304 stainless steel and comes standard with a Marine Edge to help protect against liquid slippage



Description: Our sinks and countertops must be ordered separately and are installed in the field. Most of our countertops are fabricated from one piece of fully welded, 16 gauge, 304 stainless steel. They extend 1" beyond the front, right, and left sides of base cabinet dimensions. Unless otherwise specified, they come with a Marine Edge to help protect against liquid slippage. Optionally, 4" high backsplashes and endsplashes are available to protect wall surfaces.

Base Cabinets Compatible with Additional Sink Bowl



AC

DB

AA

DA

DG

DJ

We suggest using Models AC and DB for moisture ventilation.

All piping and sink bowls can fit under any of these models with the door compartments and no drawers on top.




Cabinets



Customizable
Casework

DRAWER HOUSING

Please email us at info@blickman.com

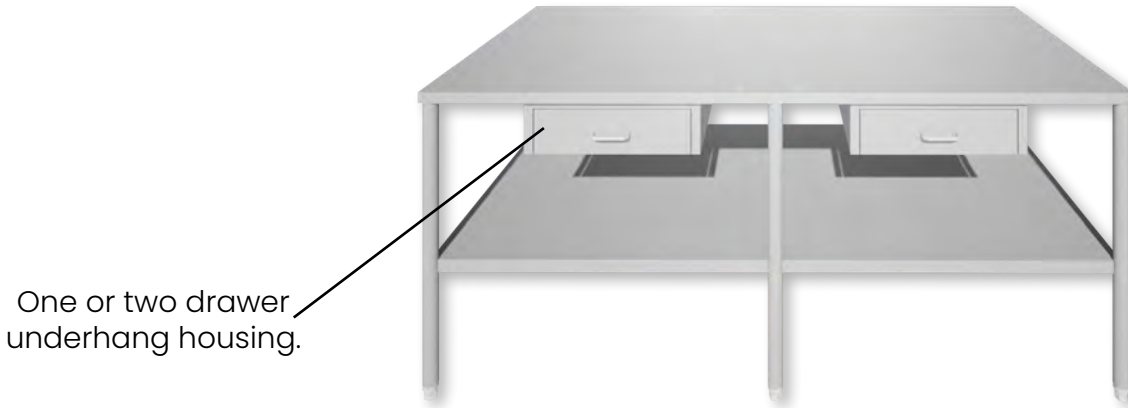

Description: You can use drawer housing to add a drawer or two under your countertop or tabletop surface. This helps increase storage space to prevent lack of access to equipment and supplies when stored separately. All drawer housing is 22" deep and reaches 5" below the underside of the countertop or tabletop. Width of drawer housing varies depending on size and number of drawers inside. The drawers are all 18 1/8" deep and 2 1/2" tall and come in two width sizes: 14 1/8" and 20 1/8".

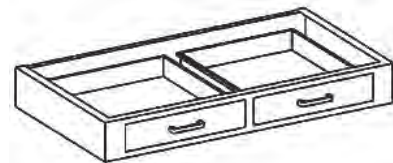

Name	Single Drawer		Double Drawer	
Drawer & Housing Widths	14 1/8"W Drawer 24"W Housing	20 1/8"W Drawer 29"W Housing	14 1/8"W Drawer 35"W Housing	20 1/8"W Drawer 47"W Housing
Model #	DH124S	DH129S	DH235S	DH247S
Item #	2043424000	2043429000	2043435000	2043447000
Shipping Weight	35 lbs.	40 lbs.	50 lbs.	60 lbs.

Custom Designs Available Upon Request
Please email us at info@blickman.com

OPTIONS



Sloped Top is available for all High Cabinets and Wall Cabinets. Listed below are the sloped tops that correspond to the cabinets with the standard dimensions shown in this previously in this section.

Model #	Item #	Description	Shipping Weight
ST-1818	5003518180	Sloped Top for 18 ³ / ₄ "W High Cabinets (18 ³ / ₄ " x 11 ¹ / ₄ " x 18")	24 lbs.
ST-3518	5003535180	Sloped Top for 35"W High Cabinets (35" x 11 ¹ / ₄ " x 18")	41 lbs.
ST-1813	5003518130	Sloped Top for 18 ³ / ₄ " W Wall Cabinets (18 ³ / ₄ " x 8 ¹ / ₄ " x 13")	21 lbs.
ST-3513	5003535130	Sloped Top for 35" W Wall Cabinets (35" x 8 ¹ / ₄ " x 13")	36 lbs.

ACCESSORIES



Electronic Locking Systems available
for most of our cabinets



Additional Shelves, your choice of
stainless steel or glass

Custom Designs Available Upon Request
Please email us at info@blickman.com

Cabinets

CASEWORK
Construction
Specifications

Construction Specifications

Standard Dimensions	High Cabinets: 84" tall x 18" deep, widths vary Wall Cabinets: 30" tall x 13" deep, widths vary Base Cabinets: 35 3/4" tall x 22" deep, widths vary Countertops: 1" overhang in front and both sides of base cabinets
Materials	304 Stainless Steel 1/4" clear tempered sheet glass
Gauge	Body, Sloped Top, Drawers, and Shelf Inserts: 18GA; Base: 16GA Glass Doors (Front and Back): 18GA Solid Doors (Front): 18GA; Solid Doors (Back): 20GA
Welding	All welding by heliarc method and exposed welds are ground smooth
Finish	Exposed surfaces are free from pit marks, weld seams, scale and are polished with #4 polish to a satin finish
Casters	N/A
Notes	<ul style="list-style-type: none">• Cabinet Parts:<ul style="list-style-type: none">• Hinge Doors: Hung on semi concealed stainless steel hinges and fitted with die cast aluminum bar pulls and spring loaded nylon roller catches.• Sliding Doors: Suspended from overhead ball bearing rollers, which are noiseless and self-lubricating, and ride in stainless steel guide strips fitted with die formed, recessed pulls securely welded in place.• Shelves: Constructed with a channel shaped, flanged edge and centers the full height of the cabinet.• Drawers: Drawer bodies are a one piece construction with covered corners. Drawer face equipped with die cast aluminum bar pole handles. Drawers operated on ball bearing roller slides with full extension.• High Cabinets & Wall Cabinets: Recessed pan back, 3/4" deep.• Base Cabinets: Each applied with a channel shaped base, incorporating toe space approximating 3" deep and 4" high, for easy cabinet access. Can be omitted when recessed or another base is used.• Sinks and Countertops: Fabricated in one piece, where possible, with welded corners, channel shaped exposed edges, and reinforced with three full length hat shaped galvanized channels.

Shipping Information


All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

THE BLICKMAN DIFFERENCE

Console Cabinets

- Our console cabinets are designed with you in mind. Without taking up valuable floor space, choose these cabinets for storing a full scheduled day, protecting your sterile supplies behind closed doors, and allowing instant access to supplies and equipment to minimize procedural delays.
- We offer individual units that can be combined and assembled into your own custom console arrangements. You can easily design your own by selecting cabinets with solid or glass doors available with or without locks. Locks can be keyed alike or independently. Stainless steel perimeter recessing trim may be purchased with all built-in installations.
- We offer units with shelving, good for storing equipment and supplies and other units with pegboard backs, great for storing large pieces of equipment.
- We also offer a desk cabinet with drawers, a sloped writing surface, and a dry erase board.

Key Product Features


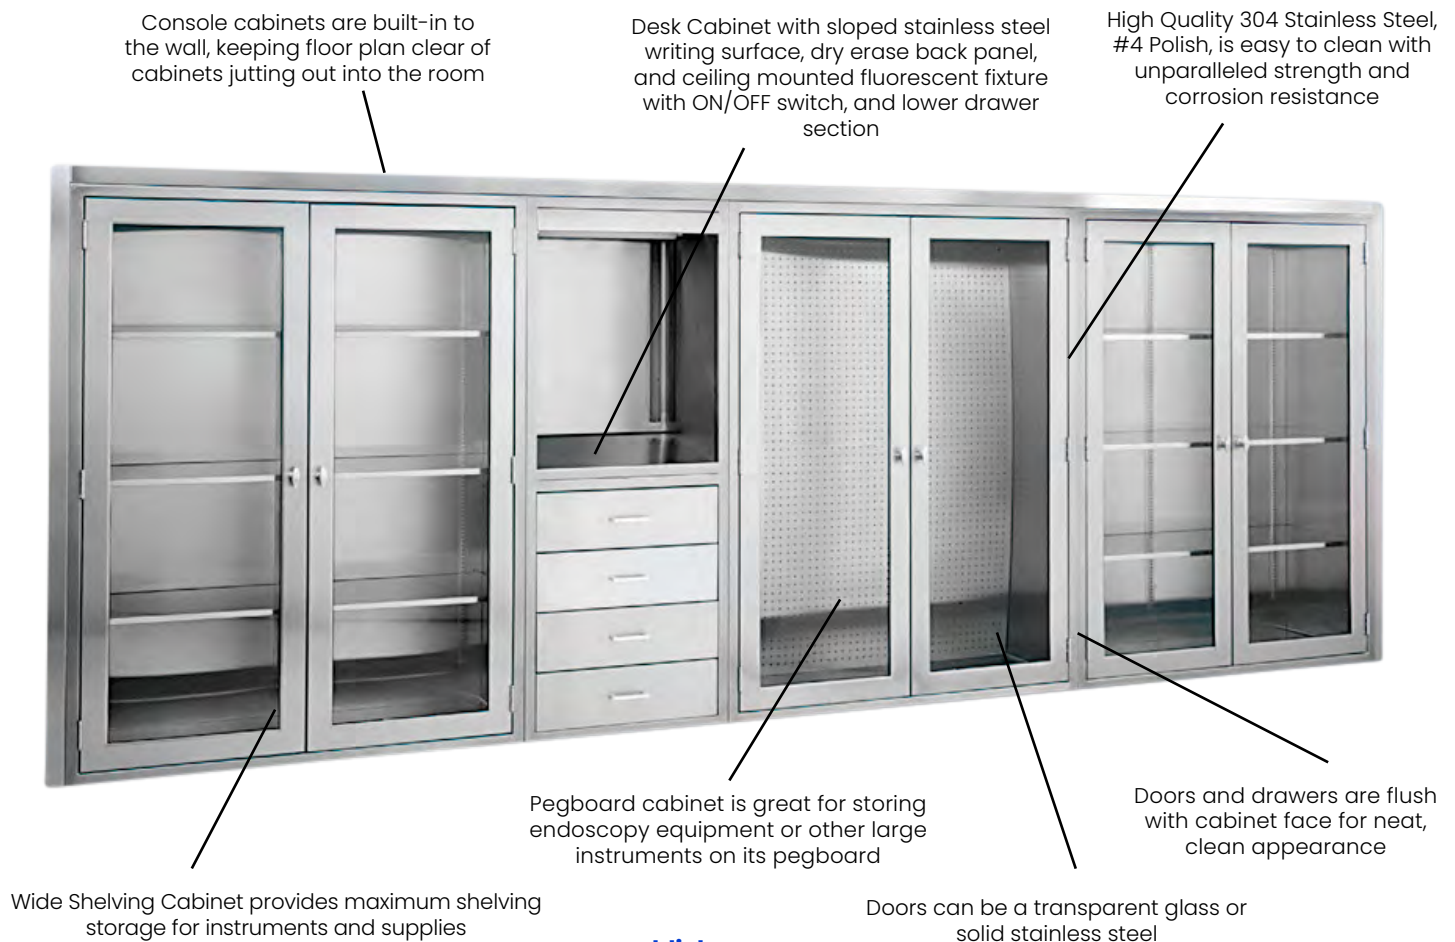


Cabinets

Console Cabinets


SINGLE WIDTH

Description: Our single width console cabinets are 24 1/8" x 60" x 18" and are designed as individual units that can be combined and assembled into your own custom console arrangements. All doors and shelves come in glass or solid stainless steel. Drawers are all stainless steel.

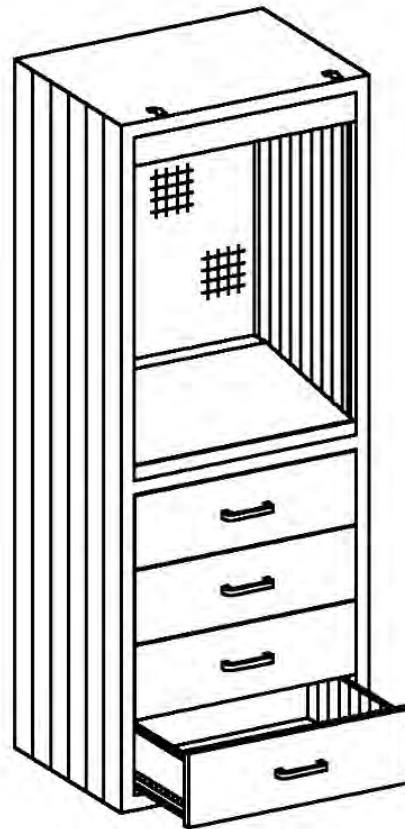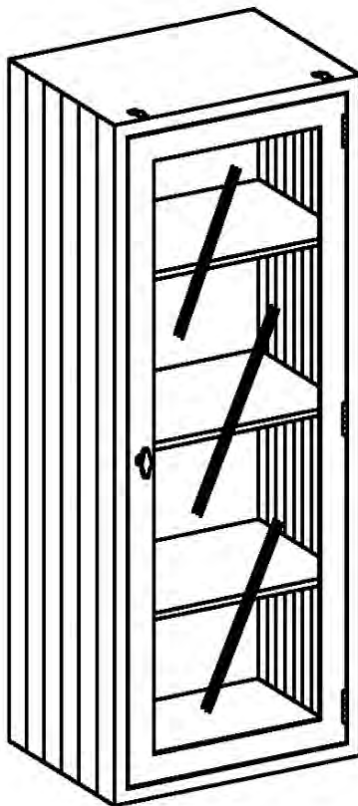

Name	Miscellaneous Supply Cabinet		Desk Console Cabinet
	Glass Door	Solid Door	Drawers
Model #	MS24	MS24S	DC24
Item #	1716724000	1716724258	1713224000
Shipping Weight	240 lbs.	240 lbs.	245 lbs.

Custom Designs Available Upon Request
Please email us at info@blickman.com



Cabinets

Console Cabinets

DOUBLE WIDTH

Description: Our double width console cabinets are all designed as individual units that can be combined and assembled into your own custom console arrangements. All doors and shelves come in glass or solid stainless steel. They are both 60" high and 18" deep and come in two width sizes: 35" and 47".



Name	Equipment & Supplies Console Cabinet		Table Accessories Console Cabinet	
	Glass Door	Solid Door	Glass Door	Solid Door
35" W				
Model #	ES35	ES35S	TA35G	TA35
Item #	1713735000	1713735258	1718235010	1718235000
Shipping Weight	250 lbs.	250 lbs.	250 lbs.	250 lbs.
47" W				
Model #	ES47	ES47S	TA47G	TA47
Item #	1713747000	1713747258	1718247003	1718247000
Shipping Weight	275 lbs.	275 lbs.	355 lbs.	355 lbs.

Custom Designs Available Upon Request
Please email us at info@blickman.com

Cabinets

Console Cabinets

RECESSED WARMING CABINETS

Description: Our recessed warming cabinets are designed for built-in installation. Single chamber glass door, solid door, and passthrough models available. Three perforated stainless steel shelves come standard in these models.

Glass Door



Solid Door



Passthrough



Note: For the passthrough unit, the front door is glass, the back door is solid.

Dimensions

Width: 30" x Height: 60" x Depth: 20 5/8"

Electrical:

Amps: 7.5 | Total Wattage: 750

Name	Glass Door	Solid Door	Passthrough
Model #	SW40TG	SW40TS	SW40TPTGS
Item #	14BSW40243	14BSW40200	14BSW40278
Shipping Weight	320 lbs.	320 lbs.	245 lbs.

Options: Dual chambers, alternative passthrough configurations.



Cabinets

CONSOLE CABINET
Accessories &
Options

ACCESSORIES

Cemented
Corner Guard,
16 gauge 304
stainless steel



Recess trim
available for
built-in console
cabinets

Model #	Description	Shipping Weight
CG4448	48" High corner guards, for protection and corrosion resistance (4"x4"x48")	20 lbs.
CG4496	96" High Corner guards, for protection and corrosion resistance (4"x4"x96")	20 lbs.
Rt120	Recessing trim, 22GA 304 stainless steel (10' strips, 1 1/2" x 1 1/2" wide)	20 lbs.



Electronic Locking Systems available
for most of our cabinets



Passthrough Cabinets available
for built-in applications

Custom Designs Available Upon Request
Please email us at info@blickman.com



Cabinets

CONSOLE CABINET Construction Specifications

Construction Specifications

Standard Dimensions	All console cabinets are 16" high x 18" deep, widths vary Exception: warming cabinets are 20" deep
Materials	304 Stainless Steel 1/4" clear tempered sheet glass
Gauge	Body, Sloped Top, Drawers, and Shelf Inserts: 18GA Glass Doors: Front and Back: 18GA Solid Doors (Front): 18GA; Solid Doors (Back): 20GA
Welding	All welding by heliarc method and exposed welds are ground smooth
Finish	Exposed surfaces are free from pit marks, weld seams, scale and are polished with #4 polish to a satin finish
Casters	N/A
Notes	<ul style="list-style-type: none">• All Console Cabinets: Solid doors are double panned, channel reinforced. Glass doors come in double shell design, with one piece outer frames dieformed to receive rubber gasketed glass panels held in place by inner retaining strips.• Double Door Console Cabinets: Right door fitted with two point up and down knob latching, left hand door with integral stops, dummy knob, and spring loaded nylon roller catch. Doors operate on three semi-concealed stainless steel hinges. Pegboard Cabinet interiors (back and sides) are lined with removable 18GA stainless steel pegboard.• Desk Console Cabinet: Four drawers with double wall fronts operate on side mounted, two section ball bearing roller slides with built-in extension stops. Heads provided with diecast aluminum bar pulls.• Single Door Shelving Console Cabinet: Can be either right or left hinged.• Recessed Warming Cabinets: Temperature control from 90°F - 160°F. 160x180 pixel graphical display with dual colors (red/green). Built-in temperature data recorder with real time clock (RTC).

Shipping Information

All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

Blickman REVIT® Library

We have developed a library of our standard products using 3D Design Software REVIT®, which is available to your company at no charge.

Included in our Revit Library you can find:

Free standing Cabinets

Casework

Case Carts

Tables

Warming Cabinets

Visit: **www.blickman.com/revit-files**



Create your entire room from our cabinet files to discover a design that works best for your needs. We are happy to work with you to create custom cabinetry, casework, tables, etc. to fit in your space.

Custom Designs Available Upon Request

Please email us at info@blickman.com

BLICKMAN



Case Carts

Compact, stable, secure transport

Includes:


- Closed Case Carts
- Open Case Carts
- Shelving Options
- Accessories



THE BLICKMAN DIFFERENCE

- Operating room surgical staff can transport fully loaded case carts throughout the facility with the doors closed for increased protection and cart cleaning is a simple and easy task.
- We offer options that meet a variety of different surgery needs including neurosurgery, general surgery, outpatient surgery, labor and delivery, and more. We also offer space saving solutions that take up less floor space while being able to handle more extensive procedures.
- Our broad offering of case carts remains the most durable and highest functioning on the market. We are the only manufacturer in our class to offer a lifetime limited warranty. Our advanced engineering capabilities enable us to customize case cart designs to satisfy virtually any requirement your medical facility may have.
- The doors of the closed case carts swing a full 270° and a positive spring acting clip at the cart ends capture doors to stay in the open position during cart washing and while in use in the operating room.

Key Product Features

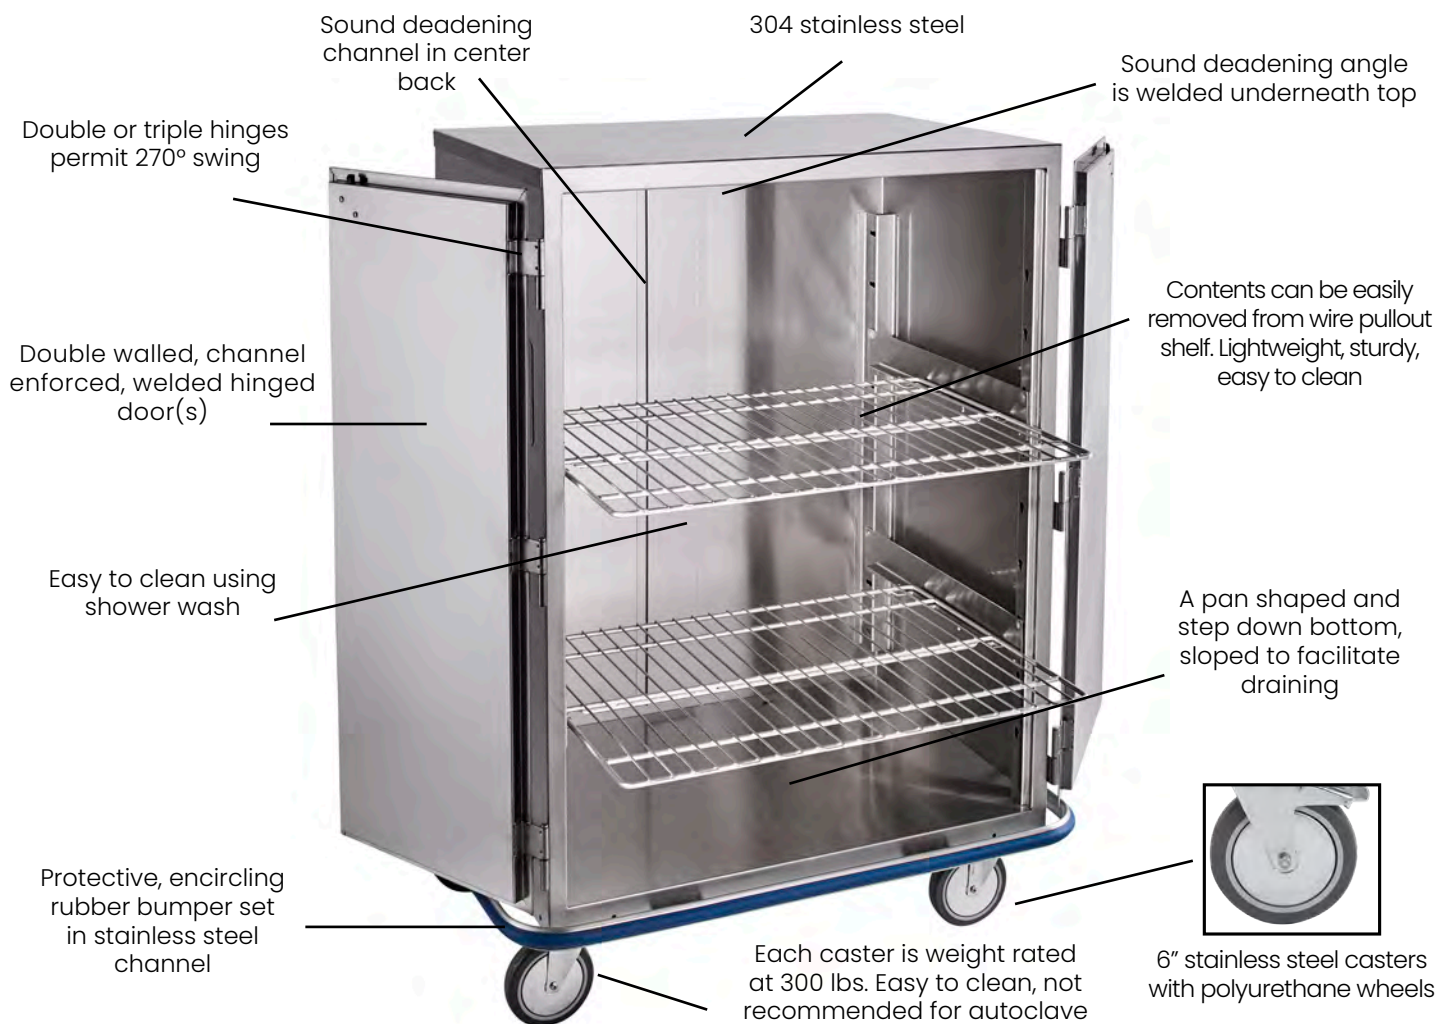



Case Carts

Maxi to Mini

Description: Our white maxi, multipurpose, and mini case carts differ in width, they are all 40 1/2" tall and 29" deep.. They each come standard with one wire shelf. The maxi case cart comes standard with a heavy duty roll-out shelf, and the multipurpose and mini case carts come with a lightweight pull-out shelf.

Push Handle



Maxi Cart

52"W

Ideal for procedures that require a larger volume of supplies such as neurosurgery and orthopedic surgery

Internal Dimensions:

42 7/8"W x 29 3/8"H x 25"D



Multipurpose Cart

42" W

Ideal size for most routine surgical procedures, whether or not your facility uses a container system

Internal Dimensions:

32 7/8"W x 29 5/8"H x 25"D



Mini Cart

29 5/8" W

Designed for labor and delivery and outpatient surgery, where a smaller cart is preferred

Internal Dimensions:

20 1/2"W x 29 5/8"H x 25"D



Name

Maxi

Multipurpose

Mini

Solid Doors

Model #	CCC1-19	CCC2-19	CCC3-19
Item #	2293331000	2293332000	2293333000
Floor Space	10 1/2 ft²	8 1/2 ft²	6 ft²
Shipping Weight	266 lbs.	225 lbs.	168 lbs.

Glass Doors

Model #	CCC1-19G	CCC2-19G	CCC3-19G
Item #	229333G1000	229333G2000	229333G3000
Floor Space	10.47 ft²	8.46 ft²	5.97 ft²
Shipping Weight	260 lbs.	219 lbs.	165 lbs.

Custom Designs Available Upon Request

Please email us at info@blickman.com



Case Carts

Space Saving

Description: Our space saver case carts are designed to give a greater capacity while using the same floor space as the mini and multipurpose case carts. Their height and additional shelving provide additional storage capacity. Instead of 40 1/2" tall, they are 55 1/2" tall, and instead of one shelf, they come standard with two lightweight pull-out wire shelves.

Space Saving Cart

29 5/8" W

This cart can handle most routine surgical procedures.

Internal Dimensions:

20 1/2"W x 44 5/8"H x 25"D



Ultra Space Saving Cart

42" W

This cart can handle more extensive procedures.

Internal Dimensions:

32 7/8"W x 44 5/8"H x 25"D



Recessed Handle



Name

Space Saving

Ultra Space Saving

Solid Doors		
Model #	CCC4-19	CCC5-19
Item #	2293334000	2293335000
Floor Space	6 ft ²	8 1/2 ft ²
Shipping Weight	208 lbs.	276 lbs.
Glass Doors		
Model #	CCC4-19G	CCC5-19G
Item #	22933G4000	22933G5000
Floor Space	6 ft ²	8 1/2 ft ²
Shipping Weight	198 lbs.	262 lbs.

Custom Designs Available Upon Request

Please email us at info@blickman.com

Case Carts

Over The Road

Description: As healthcare processes change, Blickman works with customers to design the products they need. With growing demand for off-site sterile processing, Blickman reengineered its case cart lineup by adding a new series of carts dedicated to meet its customers' new and more demanding transport requirements.



**Ultra Space Saver - OTR5 is shown here with optional vertical side handles.*



Name	Item #	Model #	Dimensions (WxHxD)	Floor Space	Shipping Weight
Maxi	2327331030	OTR1	53 x 42 x 29	10 1/2 ft ²	266 lbs.
Multipurpose	2327332030	OTR2	43 x 42 x 29	8 1/2 ft ²	225 lbs.
Mini	2327333030	OTR3	30 5/8 x 42 x 29	6 ft ²	168 lbs.
Space Saver	2327334030	OTR4	30 5/8 x 56 3/4 x 29	6 ft ²	208 lbs.
Ultra Space Saver	2327335030	OTR5	43 x 56 3/4 x 29	8 1/2 ft ²	276 lbs.

Custom Designs Available Upon Request

Please email us at info@blickman.com



Case Carts

Open

Description: Our open case cart designs are easy to clean, dry, load, and maneuver. The full encircling bumper and solid bottom prevents cross contamination. This design is ideal for carts that go directly to a sterile core, bypassing non-sterile transport.

Overall Dimensions:

Width: 42" x Height: 42" x Depth: 29"



Name	Solid Shelves	Wire Shelves
Model #	OCC3	OCC4
Item #	2410396000	2410496000
Shipping Weight	219 lbs.	141 lbs.

Custom Designs Available Upon Request
Please email us at info@blickman.com




Case Carts

Interior Shelving

STANDARD

Wire Roll Out Shelf

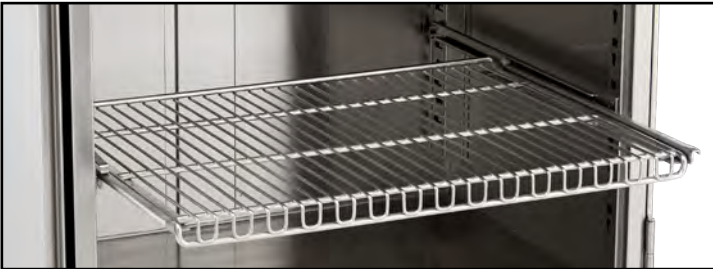

CCC1

Wire Pull Out Shelf



CCC2, 2E, 3, 4, and 5

OPTIONAL



Roll Out Shelving

Pull Out Shelving

Case Carts	Wire	Perforated	Solid	Wire	Perforated	Solid
CCC1	611C1RWKIT	611C1RPKIT	613C1RSKIT	N/A	61517PIKIT	61517S2KIT
CCC2/CCC5	610C2RWKIT	610C2RPKIT	610C2RSKIT	6152272KIT	6152275KIT	6152274KIT
CCC3/CCC4	610C1RWKIT	610C1RPKIT	610C1RSKIT	6152273KIT	6152271KIT	6152073KIT



Case Carts

Exterior Shelving

EXTENSION SHELVES



Available on Model CCC2E Only

- Expand your work surface area -

DROP SHELVES



Compatible with CCC1, CCC2, & CCC3

- Expand your work surface area -

Custom Designs Available Upon Request

Please email us at info@blickman.com



Case Carts

Accessories

ACCESSORIES

Clean/Dirty Indicators



US Design Patent #: US D883,378 S
US Utility Patent#: US 10,643,505 B1



US Design Patent #: US D883,379 S
US Utility Patent#: US 10,643,505 B1

Part #	Description	Shipping Weight
5278628KIT	Angle Model	2 lbs.
5200045KIT	Dial Model	2 lbs.
5278618KIT	Pod Model	2 lbs.



Card Holder

We offer a 8.5" x 11" card holder. Custom sizes and placement options available. Stainless steel frame withstands prolonged use and cutouts allow for drainage.



Tote Boxes

Sturdy, long lasting tote boxes are ideal for organizing and storing small supplies that may slip through the spaces of wire shelves.

Part #	Description	Shipping Weight
5206701185	Card Holder	N/A - Factory Installed
9854194720	Tote Boxes	5 lbs.



Case Carts

Construction Specifications

Construction Specifications

Universal Dimensions	Closed Case Carts: 29" deep, varying widths. Standard Height: 40 1/2"; Space saving height: 55 1/2" Open Case Carts: 42" x 42" x 29"
Materials	304 stainless steel, non-magnetic
Gauge	Closed Case Carts: Body & Doors: 18GA; Top & Chassis: 16GA Open Case Carts: Top & Bottom: 16GA; Shelf: 18GA Bumper Channel: 14GA
Welding	All welding by heliarc method and exposed welds are ground smooth
Finish	Exposed surfaces are free from pit marks, weld seams, scale and are polished with #4 polish to a satin finish
Casters	Four 6" stainless steel swivel casters with polyurethane wheels, weight rated at 300lbs (one with directional lock)
Notes	Found on next page

Shipping Information

All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

Custom Designs Available Upon Request

Please email us at info@blickman.com



Case Carts

Construction Specifications

Notes Continued

CLOSED CASE CARTS:

- **Body:** One piece top and one piece body. Sound deadening angle welded under the top. Sound deadening channel on the center back. A pan shaped, step down bottom with a slope that facilitates draining. Horizontal intersections filled with heat resistant silicone. The body shell is bolted to the chassis. A tubular push handle is provided at one end of the cart.
- **Doors:** Double walled, channel enforced, (double or triple) hinged doors with paddle latch pulls on leading edges. Doors less than 36" high swing on two hinges, while doors greater than 36" high swing on three hinges. All doors permit full 270° swing. In fully opened position, positive spring acting clips at the cart ends capture doors for cart washing or operating room use.
- **Shelves:** Shelves slide on adjustable stainless steel wires, suspended from keyhole punched standards welded to the cart interior.

OPEN CASE CARTS:

- **Frame:** U-shaped tubular framing formed around 3" radii or tubular corner posts stabilized and capped by a pan shaped top welded to posts at contact points. Posts are fitted with casters and either rolling bumpers or encircling rubber bumpers.
- **Tops, bottoms, fixed shelves:** Fabricated with turned down edges, either hemmed or flanged, with corners notched to sit over or snugly against the inside contour of the upright members. Notched corners are fully welded to the uprights the full height of the facing edges as well as around the notch.
- **Adjustable shelves:** Solid rods welded between the tubular uprights at each end, stabilizing the framing members while providing varying levels of shelf adjustment.

Custom Designs Available Upon Request

Please email us at info@blickman.com

BLICKMAN



Chairs

Providing ultimate comfort and function

Includes:

- Patient Room Chairs
- Waiting Room Chairs



THE BLICKMAN DIFFERENCE

Chairs

- Our patient chairs come in our same washable vinyl (75 colors available – see upholstery catalog) and are designed to be used in patient rooms and offices that require easy-to-clean, sterile environments.
- Our waiting room chairs come in our new 100% Polyester fabric (19 colors available – see upholstery catalog) and are designed to be used in more comfortable and inviting environment such as waiting areas.
- All of our chairs include a backrest and four black washable plastic legs. We offer a standard size with and without arm rests.

Key Product Features



Chairs

Patient & Waiting Room

Patient Room Chairs: Our patient room chairs come in our vinyl fabric for comfortable seating designed for use in patient exam rooms, offices, hallways, and other areas of your facilities that require sterilization.

Waiting Room Chairs: Our waiting room chairs come in our polyester fabric for more comfortable and inviting environments such as waiting areas.

Sizes: Our standard chair size is 24" x 33" x 22 5/8", comes with or without arm rests and has a weight capacity of 300 lbs.



Name	Chair	Chair with Arms
Vinyl (Patient Room Chairs)		
Fabric		
Model #	1130	1130WA
Item #	1051130000	1051130100
Shipping Weight	18 lbs.	21 lbs.
Polyester Fabric (Waiting Room Chairs)		
Fabric		
Model #	1120	1120WA
Item #	1051120000	1051120100
Shipping Weight	18 lbs.	21 lbs.

Options: 75 vinyl colors and 19 polyester fabric colors- see upholstery catalog



Chairs

Construction Specifications

Construction Specifications

Standard Dimensions

Standard Seat: Width: 24" x Height: 33" x Depth: 22 5/8"

Materials

Arms and Legs: Black Plastic

Seats: 75 vinyl colors or 19 polyester fabric colors – see upholstery catalog

Gauge

N/A

Welding

N/A

Finish

N/A

Casters

N/A

Shipping Information

All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

Toll Free: (800) 247-5070
Local: (973) 330-0557



www.blickman.com
info@blickman.com

1099 Wall Street West, Suite 250A, Lyndhurst, NJ 07071

BLICKMAN



Decontamination Stations

Optimal infection control

Includes:

- Decontamination Stations
- Faucet Options
- Accessories




THE BLICKMAN DIFFERENCE

Decontamination Stations

Description: Our decontamination stations provide optimal infection control in today's high risk healthcare environments. Our durable stainless steel decontamination stations meet the stringent Association for the Advancement of Medical Instrumentation (AAMI) guidelines for maximum sterility and utility.

- Our decontamination stations have an ergonomic working height for reduced back stress, symmetrical design for either left or right work flow, 18" counter space on both sides to set instruments down, and an 8" backsplash to protect against water splashes.
- Three sink bowls are included, which feature a unique, "no drip" sink lip, pitched bottoms for proper drainage, and permanently etched gallon and liter calibration inside each bowl for precise measurement.
- Faucets are all sold separately. Options include: a pre-rinse combination faucet, a wall-mounted faucet, and a wall-mounted air, gas and VAC valve with serrated barbed end hose.

Key Product Features

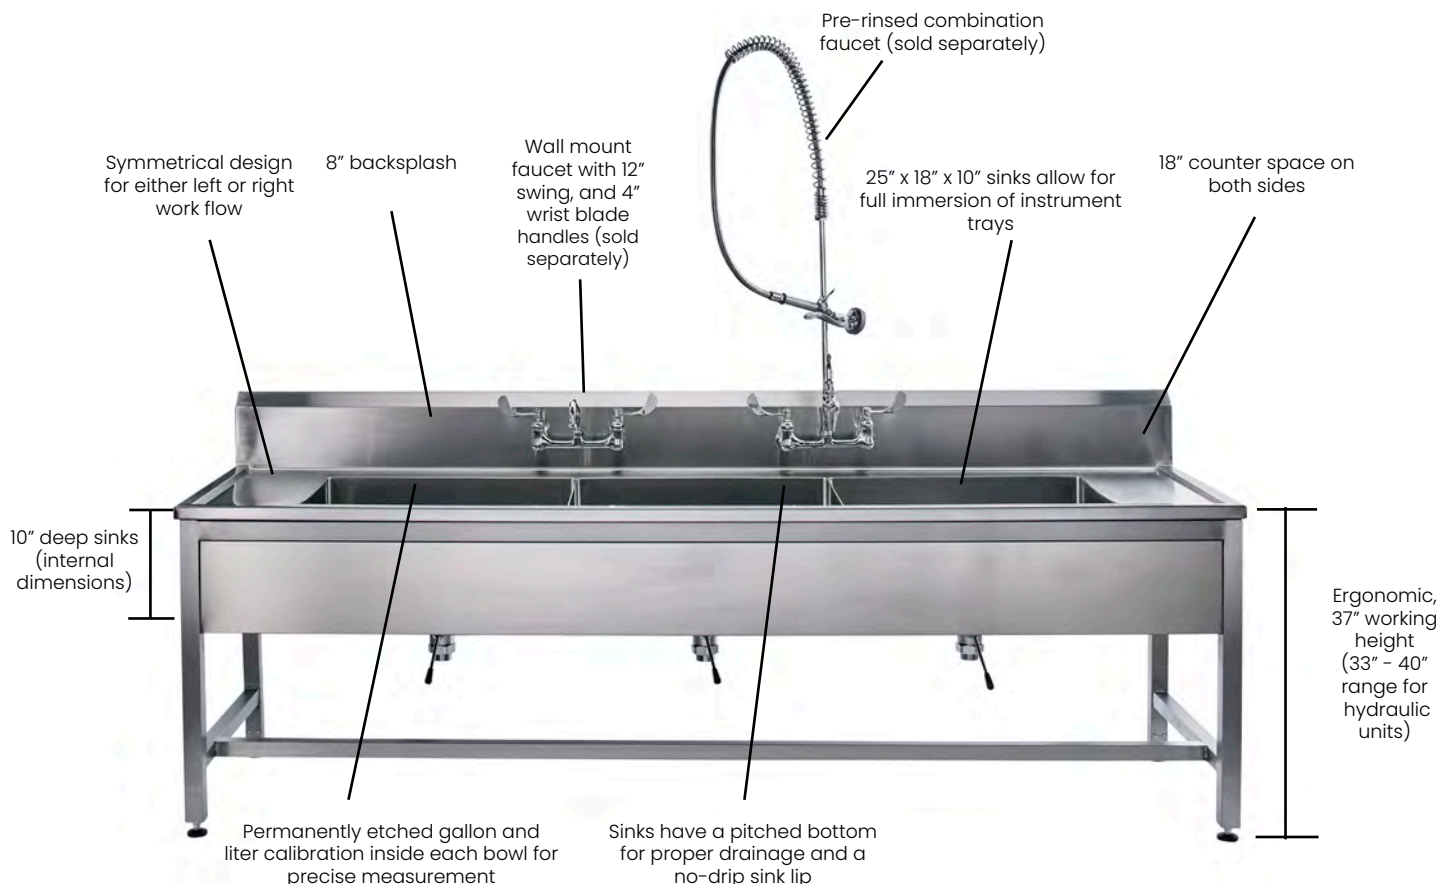

Decontamination Stations

Description: We offer three decontamination stations. One sits on two base cabinets, and the other two sit on stainless steel legs that are either stationary or adjustable. All three types of decontamination stations are set to ergonomic working heights. You have the choice of wall-mounted and deck-mounted faucets. All faucets sold separately.

Decontamination Station External Dimensions

Width: 116" x Height: 37" x Depth: 26 1/2" or 30"

*33" - 40" adjustable height range for hydraulic unit



Base Cabinet Decontamination Station

Mounting Types	Wall mounted Faucets 26 1/2" Deep	Deck Mounted Faucets 30" Deep
Model #	DSBC26	DSBC30
Item #	162DSBC001	162DSBC000
Shipping Weight	371 lbs.	391 lbs.

Stationary Decontamination Station

Mounting Types	Wall mounted Faucets 26 1/2" Deep	Deck Mounted Faucets 30" Deep
Model #	DSHB26	DSHB30
Item #	162DSHB001	162DSHB000
Shipping Weight	442 lbs.	462 lbs.

Hydraulic Decontamination Station

Mounting Types	Wall mounted Faucets 26 1/2" Deep	Deck Mounted Faucets 30" Deep
Model #	DSHY26	DSHY30
Item #	162DSHY017	162DSHY000
Shipping Weight	442 lbs.	462 lbs.

All decontamination stations include three station sinks.

Sink Dimensions: 25" x 18" x 10"



Decontamination Stations

Options

FAUCET OPTIONS

| All faucets sold separately |

Deck Mounted



Wall Mounted



Name	Pre-rinse Combo Faucet	Swing Faucet	Swivel Gooseneck Faucet	DI/RO Lab Faucet & Lab Hose Fitting Kit
Deck Mount				
Part #	9200601000	9200002214	9243232204	9201074150
Shipping Weight	13 lbs.	5 lbs.	5 lbs.	5 lbs.
Wall Mount				
Part #	9200133010	9200231020	9243232414	9204250KIT
Shipping Weight	13 lbs.	5 lbs.	5 lbs.	2 lbs.

Note: The DI/RO Lab Faucet is not for water, but for gas, air, or vacuum hose purposes

Decontamination Stations

Accessories



Peg Board
(Image is representative)



Eyewash



Overflow Back Drain




Cleaning Spray Gun



Thermo Valve

Name	Peg Board (24" x 116")	Eyewash	Overflow Back Drain	Cleaning Spray Gun + Tabletop Rosette	Thermo Valve
Part #	2701160240	9201849LHL	9201074150	9200107006 + 9200800017	9203600LF0
Shipping Weight	143 lbs.	8 lbs.	6 lbs.	2 lbs. + 1 lb.	7 lbs.

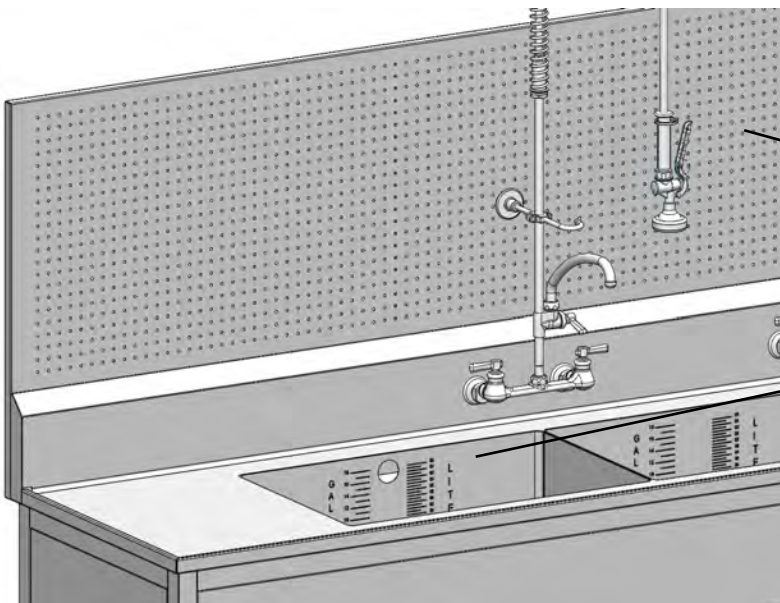

Accurate Diagram of Full Pegboard Back

Etched Measurements in Sink Bowl

Note: The Cleaning Spray Gun comes with 1 tip. 8 different sized replacement tips can be ordered:
Part #: 9200107006



Decontamination Stations

Construction Specifications

Construction Specifications

Standard Dimensions	External Dimensions: Width: 116" x Depth: 26 1/2 or 30" x Height: 37" (33" - 40" hydraulic unit) Internal Sink Bowl Dimensions: Width: 25" x Height: 18" x Depth: 10"
Materials	304 stainless steel
Gauge	Bowl: 14GA Sink Top and Channel: 16GA DSHY Legs: 16GA; Cross Bracing Square Tube: 18GA DSHB Legs and Cross Bracing Square Tube
Welding	All welding by heliarc method and exposed welds are ground smooth
Finish	Exposed surfaces are free from pit marks, weld seams, scale and are polished with #4 polish to a satin finish
Electrical	Hydraulic Unit: 120V AC
Casters	N/A
Notes	<ul style="list-style-type: none">• Ergonomic working height for reduced back stress, symmetrical design for either left or right work flow• 18" counter space on both sides to set instruments down• 8" backsplash to protect against water splashes• Three sink bowls which feature a unique, "no drip" sink lip, pitched bottoms for proper drainage, and permanently etched gallon and liter calibration inside each bowl for precise measurement• All faucets sold separately

Shipping Information

All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

BLICKMAN



Exam Stools

Providing ultimate comfort and function

Includes:

- Spindle Adjusted Stools
- Pneumatic Stools
- Parts & Accessories



THE BLICKMAN DIFFERENCE

EXAM STOOLS

- Our durable, high quality chrome and stainless steel exam stools come with 3" thick, dense foam 15" diameter cushion for ultimate comfort.
- Our upholstery is washable vinyl and is available in an array of 75 fashion colors that meet specific design requirements - see upholstery catalog for details.
- For applications that require the longevity that stainless steel provides, pick from our revolving stools, or for a more modern look, choose from four or five leg models with spindle adjusted or pneumatic lift mechanisms.
- For back support, choose one of our models with a back rest.
- Our three styles of locking casters allow for easy mobility and safety.

Key Product Features




Exam Stools

Spindle

4 LEG SPINDLE EXAM STOOLS

Description: We offer two four leg spindle adjusted exam stools with the option of 2" casters or rubber crutch tips. Choose our Passaic stool and sit comfortably on a 15" diameter, 3" thick polyfoam padded seat upholstered in vinyl or choose our Clifton stool for an easy-to-clean stainless steel seat with a non-slip vinyl insert. Add a removable pad slipcover to your Clifton stool for a more comfortable option.



Spindle

Adjusts 12"

Rubber Tips: 19" - 31"

Casters: 21" - 33"



Name	CLIFTON		PASSAIC
	Standard	With Pad	Standard
	Casters		
Model #	7745SS-C	7745SS-PC	7714-PSSC
Item #	1027745001	1027745003	1027714125
Shipping Weight	17 lbs.	17 lbs.	17 lbs.
	Crutch Tips		
Model #	7745SS	7745SS-P	7714-PSS
Item #	1027745000	1027745002	1027714025
Shipping Weight	16 lbs.	16 lbs.	16 lbs.

Options: Available in standard black. Consult factory for requests in other colors for large order quantities



Exam Stools

Spindle

5 LEG SPINDLE EXAM STOOL

Description: Our five leg spindle exam stool rests on a 24" diameter base. Choose between a black composite base or an aluminum base with Wall Saver™ tips on the ends to protect against scuff marks and offer a textured surface for foot grip. Sit comfortably on its 15" diameter, vinyl upholstered seat with 3" thick polyfoam padding. This model is available with or without a back.



Spindle

Adjusts 5 7/8"
Height: 20 7/8" - 26 3/4"



Name	5 Leg Spindle Stool	5 Leg Spindle Stool with backrest
Aluminum Base		
Model #	1113	1113WB
Item #	1021113000	1021113200
Shipping Weight	22 lbs.	26 lbs.
Black Composite Base		
Model #	1113BLK	1113WB-BLK
Item #	1021113100	1021113300
Shipping Weight	22 lbs.	26 lbs.

Options: Foot ring, 75 different vinyl colors - see upholstery catalog



Exam Stools

Pneumatic

FOOT OPERATED EXAM STOOL

Description: Our five-leg foot operated exam stool have a push ring under a 24" diameter aluminum base with Wall Saver™ tips on the ends to protect against scuff marks and offer a textured surface for foot grip. Sit comfortably on its 15" diameter, vinyl upholstered seat with 3" thick polyfoam padding. This model is available with or without a back.



Foot Pedal

Adjusts 7"
Height: 18 3/8" - 25 3/8"



Name	Foot Operated Stool	Foot Operated Stool with Backrest
Aluminum Base		
Model #	1205	1206
Item #	1041205000	1041206000
Shipping Weight	22 lbs.	28 lbs.

Options: Foot ring, 75 different vinyl colors - see upholstery catalog



Exam Stools

Pneumatic

HAND OPERATED EXAM STOOLS

Description: Our five-leg hand operated exam stool rests on a 24" diameter base. Choose between a black composite base or an aluminum base with Wall Saver™ tips on the ends to protect against scuff marks and offer a textured surface for foot grip. Sit comfortably on its 15" diameter, vinyl upholstered seat with 3" thick polyfoam padding. This model is available with or without a back.

Standard Stools



Hand Lift

Adjusts 7"
Height: 18 3/8" - 25 3/8"



Name	Hand Operated Stool	Hand Operated Stool with Backrest
	Aluminum Base	
Model #	1210	1210WB
Item #	1041210000	1041210200
Shipping Weight	22 lbs.	26 lbs.
	Black Composite Base	
	Model #	1210BLK
	Item #	1041210100
Shipping Weight	22 lbs.	26 lbs.

Options: Foot ring, 75 different vinyl colors – see upholstery catalog



Exam Stools

Pneumatic

HAND OPERATED EXAM STOOLS

Economy Stools

Description: Our economy hand operated exam stool rests on a 24" diameter black composite base with black plastic twin wheel casters. Sit in comfort on a 15" diameter, vinyl upholstered seat with 3" thick polyfoam padding. this model is available with and without a back.

Adjusts 7" from 18 ³/₈" to 25 ³/₈" off the ground



Name	Economy Stool	
	Without Back	With Back
Model #	1200	1201
Item #	1041200100	1041201300
Shipping Weight	22 lbs.	26 lbs.

Options: Foot ring, 73 different vinyl colors - see upholstery catalog

Deluxe Stools

Description: Our deluxe hand operated exam stool comes standard with a foot ring for leg-joint comfort. These stools rest on a 24" diameter black composite or aluminum base, which comes with Wall Saver™ tips to protect against scuff marks and offer a textured surface for foot grip. Both bases travel easily on 2" hard rubber casters. Sit in comfort on a 15" diameter, vinyl upholstered seat with 3" thick polyfoam padding with a backrest.

Adjusts 7" from 21 ³/₈" to 28 ³/₈" off the ground



Name	Deluxe Stool	
	Aluminum Base	Black Composite Base
Model #	1212	1212BLK
Item #	1041212000	1041212100
Shipping Weight	29 lbs.	29 lbs.

Options: 75 different vinyl colors - see upholstery catalog

Foot Ring as an Accessory: Compatible on all 5 leg stools

Part #	Description	Shipping Weight
7901243000	Foot Ring for Leg Joint Comfort	6 lbs.





Exam Stools

Construction Specifications

Construction Specifications

Standard Dimensions	Seats: 15" diameter Polyfoam padding: 3" thick Height Range: 18" - 33"
Materials	Bases: Aluminum or black composite Seats: 75 colors of upholstered vinyl covering polyfoam padding. Clifton/Passaic Stool: 304 stainless steel
Gauge	Clifton Stool Legs: 18GA; Clifton Stool Seat: 14 GA Passaic Stool Legs : 18 GA
Welding	Clifton/Passaic Stool: All welding by heliarc method and exposed welds are ground smooth
Finish	Clifton/Passaic Stool: Exposed surfaces are free from pit marks, weld seams, scale and are polished with #4 polish to a satin finish
Casters	2" hard rubber casters or 2" twin wheel plastic casters
Notes	<ul style="list-style-type: none">• MR conditional stool available. See MR conditional catalog• For all vinyl colors, please see our upholstery catalog

Shipping Information

All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

Toll Free: (800) 247-5070
Local: (973) 330-0557



www.blickman.com
info@blickman.com

1099 Wall Street West, Suite 250A, Lyndhurst, NJ 07071

BLICKMAN



Foot Stools

Safe and sturdy to step up or down

Includes:


- 8" High Foot Stools
- 9" High Foot Stools
- Two Step Foot Stools
- EZ Stacking Stools + Dolly



THE BLICKMAN DIFFERENCE

- Whether chrome or stainless steel, our foot stools are high quality, durable, and safe.
- Every foot stool includes a non-slip rubber tread for secure footing and non-slip rubber tips on the stools' feet to secure floor placement.
- For heavy loads, some models include H-brace reinforcement.
- For additional user stability, some models include handrails or allow for the addition of a handrail.
- MR conditional options are also available.

Key Product Features

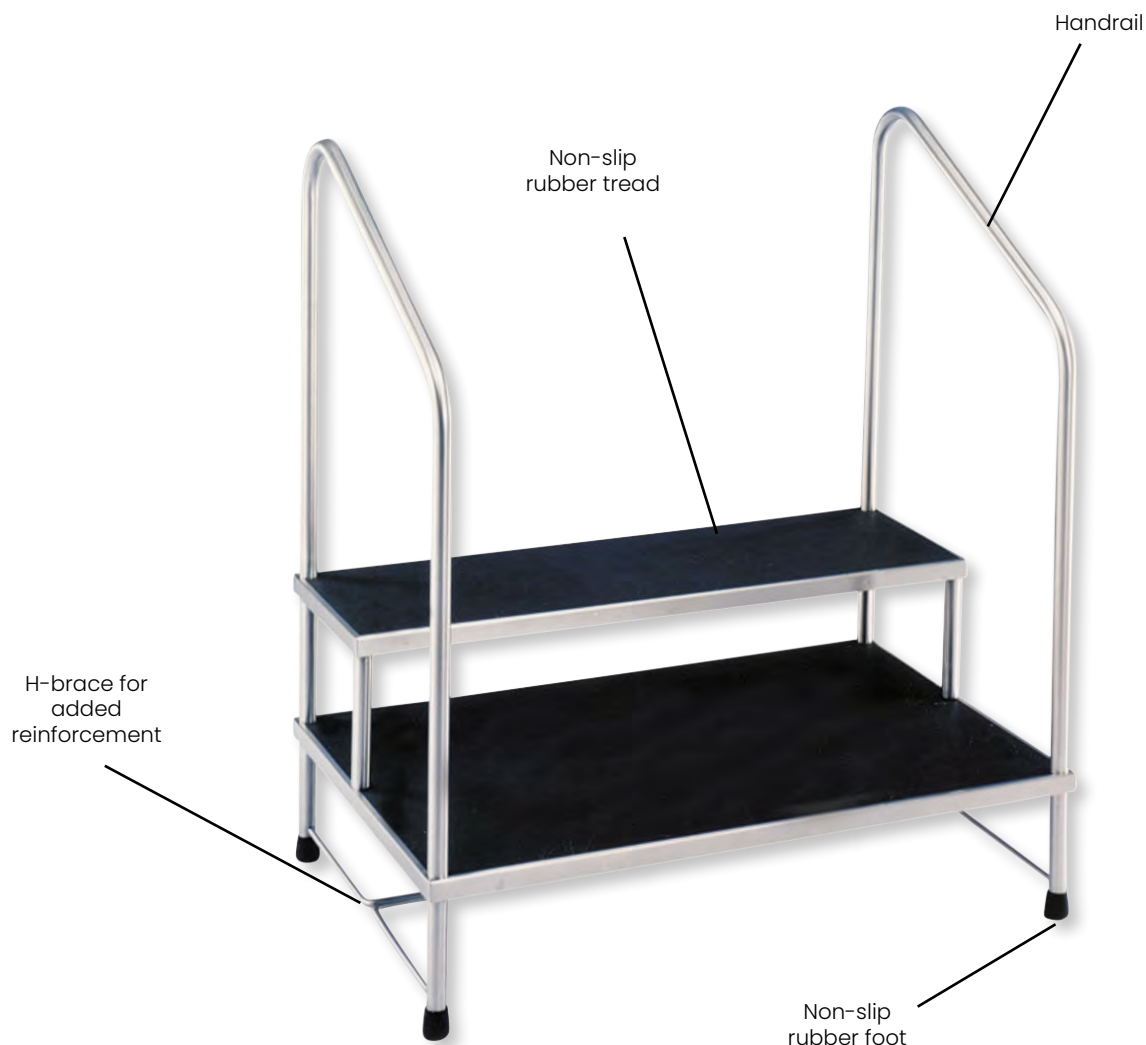

Foot Stools

One Step

8" HIGH FOOT STOOLS

Description: Our MR conditional approved Kent foot stools include one step 8" off the ground. They are industry standard, fully welded, stainless steel construction with non-slip rubber treads and feet tips. 18" and 30" width sizes are available. Depth is 12". Include a 41" tall handrail for additional support.

8" stools have the same dimensions:
Width: 18" or 30" x Height: 8" x Depth: 12"



Name	18"W	30"W
With Handrail		
Model #	7757MR-HR	7761MR-HR
Item #	1017757100	1017761100
Shipping Weight	20 lbs.*	30 lbs.*
Without Handrail		
Model #	7757MR	7761MR
Item #	1017757000	1017761000
Shipping Weight	11 lbs.	20 lbs.

*Shipping weight with an asterisk is the combined shipping weight of separate parts

Foot Stools

One Step

9" HIGH FOOT STOOLS

Description: Our 9" high foot stools come in either chrome or stainless steel and consist of one step 9" off the ground with non-slip rubber treads and feet tips. A 35 3/4" tall handrail for additional support is available for the chrome stool.

All 9" stools have the same dimensions:

Width: 14 1/4" x Height: 9" x Depth: 11 3/8"



**Stainless Steel
Stool**



Chrome Stool

Name	Stainless Steel Stool	Chrome Stool
With Handrail		
Model #	1261	1251
Item #	1011261000	1011251000
Shipping Weight	12 lbs.*	11 lbs.*
Without Handrail		
Model #	1260SS	1250
Item #	1011260000	1021251640
Shipping Weight	8 lbs.	7 lbs.

*Shipping weight with an asterisk is the combined shipping weight of separate parts



Foot Stools

Two Step

TWO STEP FOOT STOOLS

Description: Our MR conditional approved two step foot stools are industry standard, fully welded, stainless steel construction with H-braces for additional reinforcement, non-slip rubber treads for secure footing, and feet tips for firm floor placement.



Step Surface Areas
Top Step: 36" x 12"
Bottom Step: 36" x 24"

Heights of Steps
Top Step: 15 3/4"
Bottom Step: 8"

Name

2-Step Foot Stool

With Handrails (41" high)

Model #

7764MR-HR

Item #

1012041096

Shipping Weight

65 lbs.

Two Step Foot Stool with Side Handrails



Step Surface Areas
Top Step: 24" x 8"
Bottom Step: 24" x 16"

Heights of Steps
Top Step: 15 3/4"
Bottom Step: 8"

Name

The Donnelly

With Handrails (41" high)

Model #

7763MR-HR

Item #

1017763100

Shipping Weight

40 lbs.*

Without Handrail

Model #

7763MR

Item #

1017763000

Shipping Weight

27 lbs.

The Donnelly with Handrail

*Shipping weight with an asterisk is the combined shipping weight of separate parts

Foot Stools

EZ Stacking

OUR EZ Stacking Stool allows you to:

- ✓ Create wider platforms by locking side-to-side
- ✓ Create higher platforms by stacking top-to-bottom
- ✓ Store efficiently and transport easily with our corresponding dolly

EZ STACKING STOOLS



Description: Our EZ stacking stools and dolly are made with our durable stainless steel. The stools are covered with a non-slip rubber tread and feet tips.



EZ Stool Dimensions:
18 7/8" x 6 1/4" x 13 7/8"



Dolly Dimensions:
21 1/2" x 39" x 16 1/2"

Name	EZ Stacking Stool	Dolly
Model #	8862SS	8862SS-D
Item #	1018862000	1018862300
Ship Weight	14 lbs.	20 lbs.

Foot Stools

Construction Specifications

Construction Specifications

Standard Dimensions	1 step: 6 1/4" - 9" high 2 step: Bottom step: 8" high, Top step: 15 3/4" high
Materials	Chrome 304 stainless steel Black non-slip rubber
Gauge	EZ Stacking Stools: 16GA platform, 14GA legs All Stainless Steel Stools: 16GA (Exception: 7757MR-HR and 7761MR-HR have 18GA handrails)
Welding	All welding by heliarc method and exposed welds are ground smooth
Finish	Exposed surfaces are free from pit marks, weld seams, scale and are polished with #4 polish to a satin finish
Casters	Dolly: 3" swivel casters with no brakes
Notes	MR conditional foot stools are available where indicated

Shipping Information

All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

Note for: <i>1251 Stool</i>	Parts shipped separately to avoid damage and lower costs. Shipping weight with asterisk is the combined shipping weight of separate parts. Some assembly required.
---------------------------------------	--

BLICKMAN



Gowning Benches

Comfortable, practical, sterile seating to apply PPE

Includes:


- Mounted Gowning Bench
- Freestanding Gowning Bench
- Knockdown Gowning Bench



THE BLICKMAN DIFFERENCE

- Our gowning benches are completely made out of all 304 stainless steel sealed for a sterile environment and easy to clean surface areas.
- All our gowning bench models rest at an ergonomic height providing a comfortable and practical seat for applying personal protective equipment (PPE).
- The rounded edges on all our gowning benches allow for comfortable seating and ensures resistance to PPE snagging.
- All models include floor mounting holes in the feet to optionally mount the bench to the floor to secure its placement.

Key Product Features

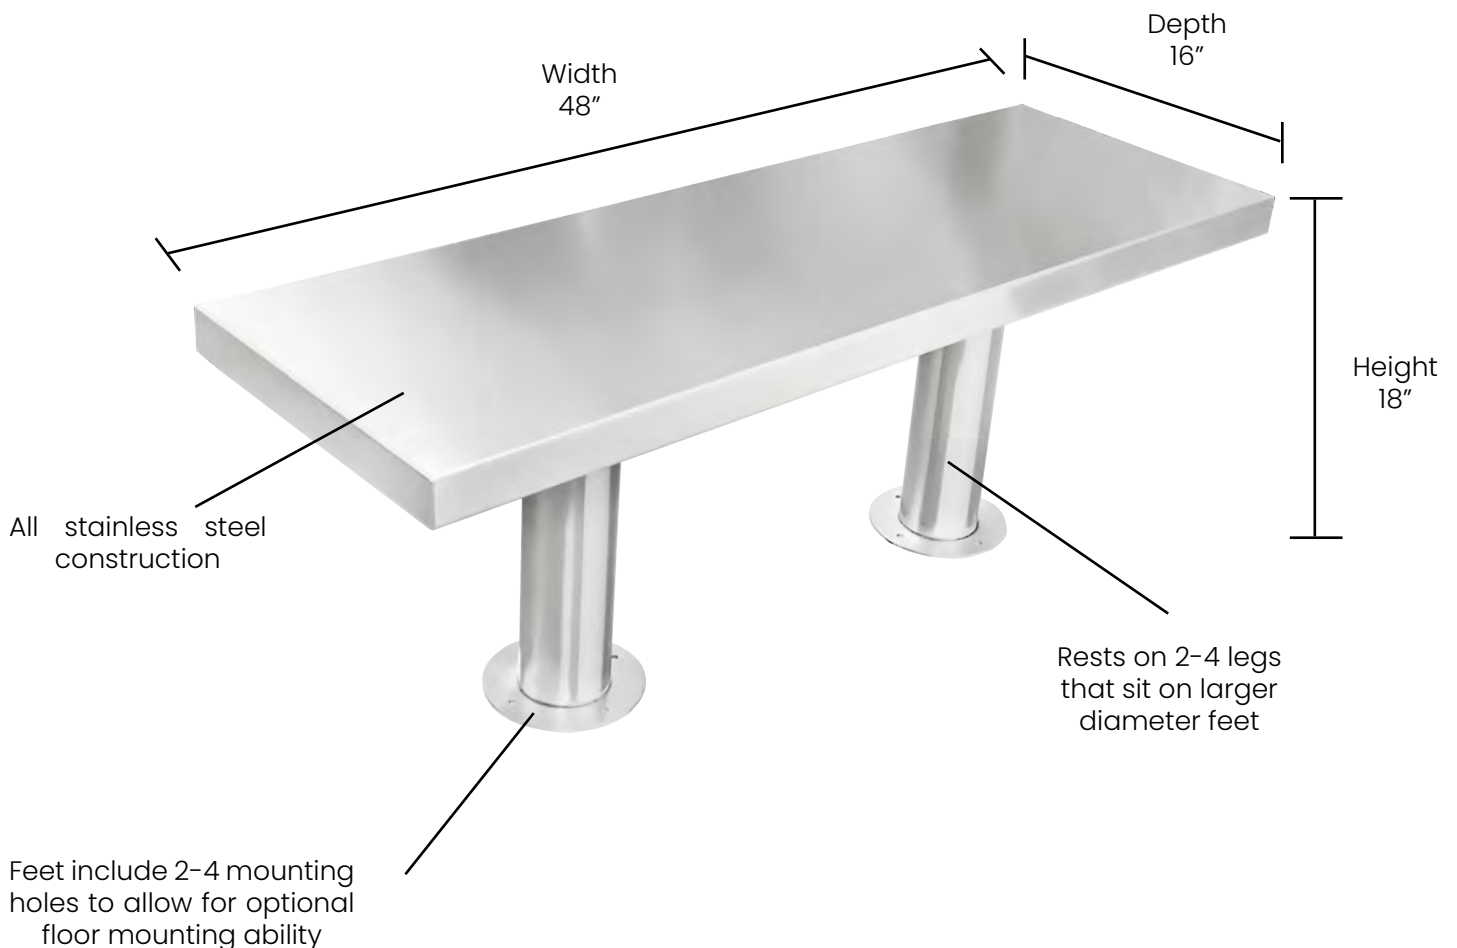

Gowning Benches

All Models

Description: Our gowning benches are made out of a heavy-duty stainless steel that provides a comfortable and practical seat for applying personal protective equipment (PPE). The solid top allows for sterilization and floor mounting options on all models for secure placement. Rounded edges for seating comfort and insuring resistance to thin fabric snagging.

All gowning benches have the same dimensions:

Width: 48" x Height: 18" x Depth: 16"



Mounted Gowning Bench

Model #	4200SS
Item #	1074200000
Shipping Weight	112 lbs.



Freestanding Gowning Bench

H-Brace

Model #	4100SS
Item #	1074100000
Shipping Weight	102 lbs.



Stainless Steel Shelf

Model #	4110SS
Item #	1074110000
Shipping Weight	107 lbs.



Knockdown Gowning Bench

Model #	4000SS
Item #	1074000000
Shipping Weight	65 lbs.

Gowning Benches

Construction Specifications

Construction Specifications

Universal Dimensions	48"W x 18"H x 16"D
Materials	304 stainless steel
Gauge	Top: 14GA Bottom & Legs: 16 GA
Welding	All welding by heliarc method and exposed welds are ground smooth
Finish	Exposed surfaces are free from pit marks, weld seams, scale and are polished with #4 polish to a satin finish
Casters	N/A
Notes	<ul style="list-style-type: none">• 48" x 16" bench sits 18" off the ground• Two 4" diameter legs with 7" diameter feet with mounting holes• Bottom is completely closed off for easy cleaning and upkeep

Shipping Information

All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

Custom Designs Available Upon Request
Please email us at info@blickman.com

BLICKMAN



Hampers

For elimination of dirty linens

Includes:

- Round Hampers
- Square Hampers
- Space Saver Hamper
- Hamper Bags



THE BLICKMAN DIFFERENCE

- Our hampers facilitate easy and safe disposal of contaminated linens. They all move easily over floors on 2" or 3" casters. Our hampers have proven to be stable when empty or full due to their wide bases and added counterweights on covered models. A bottom brace holds and protects the hamper bag from contact with the floor.
- Our hampers come in either chrome or stainless steel and we offer different shapes and sizes to fit your needs and floor plans. Additionally, we offer covered models to control airborne pathogens. All covered hampers are foot-operated to help prevent cross contamination.
- For MR conditional environments, we offer two MR conditional models: one covered and one uncovered, for your choosing.
- We offer two optional hamper bags, nylon and water soluble, that fit our round hampers.

Key Product Features




Hampers

Round

ROUND HAMPERS

Description: We offer covered and uncovered round hampers in both stainless steel and chrome. They are 35" tall and roll on 2" hard rubber swivel casters. They come in two sizes 18" diameter and 25" diameter. The covered models operate via a spring-loaded lift mechanism that opens and closes the stainless steel lid. The pneumatic top allows for pin drop quiet operation.

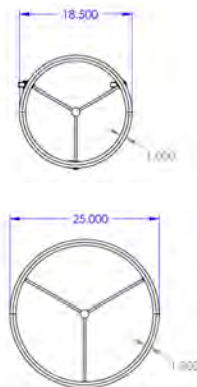

Name	Uncovered		Covered	
Lid	Chrome	Stainless Steel	Chrome	Stainless Steel
Bag Size	18"			
Model #	2018	7774SS	2118	7774SS-LF
Item #	0962018000	0927774000	096211800P	092777420P
Shipping Weight	11 lbs.	11 lbs.	21 lbs.	25 lbs.
Bag Size	25"			
Model #	2025	8773SS	N/A	8773SS-LF
Item #	0962025000	0928773000	N/A	092877320P
Shipping Weight	12 lbs.	13 lbs.	N/A	35 lbs.

Hamper Bags: 18" and 25" white nylon hamper bags and water soluble hamper bags.

MR options available, see MR section for more details.





Hampers

Square

FOLDING ADJUSTABLE HAMPER

Description: Our folding chrome hamper adjusts to accommodate three hamper bag sizes with a bottom frame to support hamper bags. Travels on 2" hard rubber swivel casters.



Dimensions:

- **18" bag size:** 19" x 36 1/2" x 18"
- **22" bag size:** 19" x 40 1/2" x 22"
- **25" bag size:** 19" x 42 1/4" x 25"

Name	Folding Adjustable Hamper
Model #	2230
Item #	0962230000
Shipping Weight	18 lbs.

SECURE CARE HAMPER

Description: Our secure care chrome hamper supports 36 - 42 gallon multipurpose bags. Its' polycoated steel lid opens using foot operated lift mechanism. Includes hamper storage pouch. Travels on 3" hard rubber swivels casters.



Dimensions:

- 18 5/8" x 37 3/4" x 19 1/2"

Name	Secure Care Hamper
Model #	2010
Item #	0962010000
Shipping Weight	26 lbs.



Hampers

Triangular

SPACE SAVER HAMPER

Description: Our space saver hamper offers hands free loading and unloading with a convenient non-slip foot pedal. Sturdy all stainless steel construction with bumper guards on lid and legs to protect equipment and walls. The solid bottom shelf provides extra security for heavy loads and a spring-loaded lift mechanism provides a pin-drop pneumatic top for quiet operation. Travels on 3" hard rubber swivel casters.



Name	Space Saver Hamper
Model #	230ISS
Item #	096230100P
Shipping Weight	24 lbs.

Hampers

Accessories

HAMPER BAGS



**Disposable Water Soluble
Plastic Hamper Bag**



**Reusable
Nylon Hamper Bag**



**Secure Care
Hamper Pouch**

Part #	Description	Shipping Weight
98390000WS	100 Plastic Water Soluble Hamper Bags	9 lbs.
9839777201	Bag, 18" Diameter Ring Hamper Nylon White	1 lb.
9839777302	Bag, 25" Diameter Ring Hamper Nylon White	1 lb.
0962012000	Secure Care Hamper Pouch for Labels	1 lb.

Construction Specifications

Universal Dimensions	Hamper Bag Sizes: 18", 22", 25", 26"
Materials	304 stainless steel Chrome
Gauge	Stainless Steel: 1" diameter, 18GA tubing Chrome: 1" diameter tubing
Welding	All welding by heliarc method and exposed welds are ground smooth
Finish	Exposed surfaces are free from pit marks, weld seams, scale and are polished with #4 polish to a satin finish
Casters	2" & 3" hard rubber swivel casters (some with locks)
Notes	MR conditional hampers available where indicated

Shipping Information

All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

BLICKMAN



IV Stands

Optimal continuous fluid delivery

Includes:

- IV Stands
- IV Stand Accessories
- IV Irrigation Safety Systems




THE BLICKMAN DIFFERENCE

IV Stands

- Our IV poles are optimal for maintaining continuous fluid delivery for every patient, available in a wide range of adjustable heights with a variety of easy locking options that can be operated with one hand.
- Our IV poles are all available in high quality chrome and stainless steel, and set on 4, 5, or 6 leg bases with casters, no projections, and great balance/tip resistance. Some bases are gravity weighted to help compensate for heavier loads. All bases have the ability to spin 360° in tight spaces.
- Most of our models have 2-, 4-, 6- and 8-(rake) hook adapters available. All come with colored secure grip tips.

Key Product Features

*See page 9 for more details on all optional features

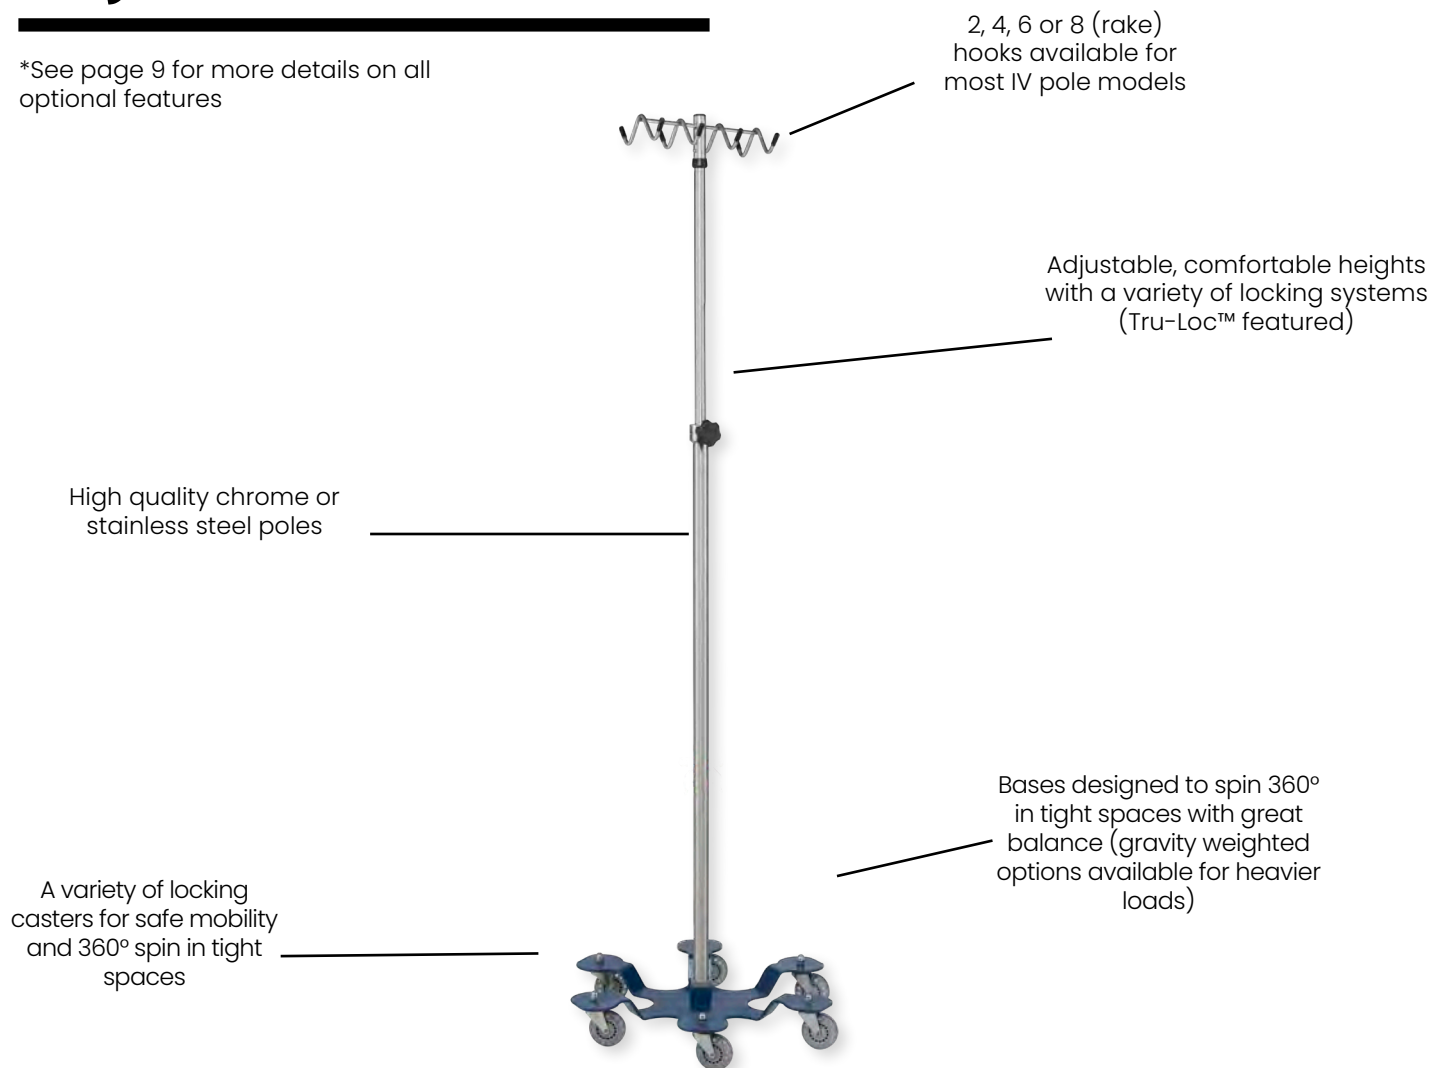


www.blickman.com

IV Stands

4 Leg

4 LEG CHROME IV STANDS

Description: We offer two 4-leg chrome IV stand models, one with a standard base, and one with a heavyweight base. Both base types include Wall Saver™ tips to protect against wall scuff marks. They both move on 2" plastic twin wheel hooded swivel casters and they both come standard with two hooks. A four hook removable adapter is available for model 1305.

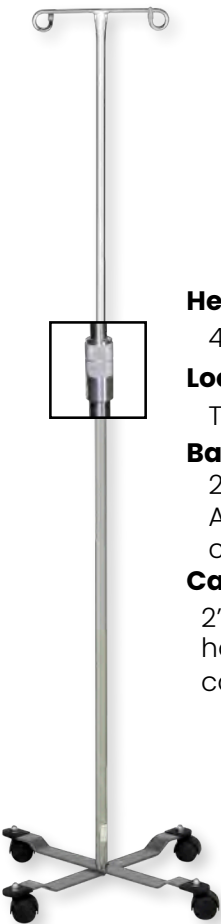

Height adjustment:

47 1/2" - 85 1/2"

Lock:


Twist

Base:

22" diameter
Apoxy coated
chrome

Casters

2" plastic twin wheel
hooded swivel
casters

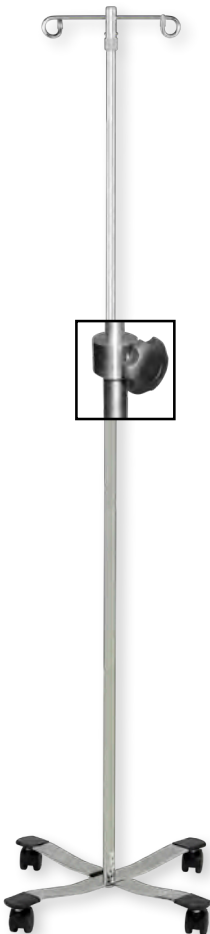

Height adjustment

51 1/2" - 93"

Lock:

Tru-loc™

Base:

22" diameter
Chrome plated
heavy bar steel

Casters

2" plastic twin wheel
hooded swivel
casters


Name	Standard Base	Heavyweight Base
# of Hooks	2 Welded Hooks	2 Removable Hooks
Model #	1305	1310
Item #	0561305000	0561310000
Shipping Weight	13 lbs.	14 lbs.

IV Stands

4 Leg

4 LEG STAINLESS STEEL IV STANDS

Description: We offer two types of 4-leg stainless steel IV stands, one with a standard base, and one with a heavyweight base. They come standard with either 2 or 4 removable hooks. Contact customer service for 6- or 8-(rake) hooks.





Name	Standard Base
# of Hooks	2 Hooks
Model #	1410SS
Item #	0571410000
Shipping Weight	13 lbs.
# of Hooks	4 Hooks
Model #	1410SS-4
Item #	0571410400
Shipping Weight	14 lbs.

Height Adjustment: 51 3/4" - 94"

Mechanism: Tru-Loc™

Base Material: Stainless steel with Wall Savers™, 22" diameter

Casters: 2" hard rubber swivel casters



Name	Heavyweight Base	
Lock Type	Twist Lock	Thumb Control
# of Hooks	2 Hooks	
Model #	8890SS	8889SS
Item #	0528890000	0518889000
Shipping Weight	24 lbs.*	24 lbs.*
# of Hooks	4 Hooks	
Model #	8890SS-4	8889SS-4
Item #	0528890400	0518889400
Shipping Weight	24 lbs.*	24 lbs.*

Height Adjustment: 66" - 100"

Mechanism: Twist Lock, Thumb Control, Foot Operated

Base Material: Heavyweight stainless steel flat bar, 22" diameter

Casters: 2" roller blade swivel casters


*Shipping weight with an asterisk is the combined shipping weight of separate parts

IV Stands

5 Leg

5 LEG IV STANDS

Description: Our 5-leg IV stands come in either chrome (standard & heavy duty) or stainless steel poles and stand on a 24" diameter, polished die cast aluminum base with Wall Saver™ caps. Contact customer service for 6- or 8-(rake) hooks on certain models.

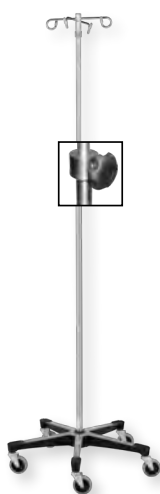


Name Pole	Chrome Pole	
	Standard (1")	Heavy Duty (1 1/4")
# of Hooks	2 Hooks	4 Hooks
Caster Heights	2 1/2" Plastic	3" Rubber
Height Adjustments	52 1/2" - 93 1/2"	56" - 100"
Model #	1315-2	1350-4
Item #	0561315000	0561350400
Shipping Weight	16 lbs.*	17 lbs.*
# of Hooks	4 Hooks	6 Hooks
Caster Heights	2 1/2" Plastic	3" Rubber
Height Adjustments	52 1/2" - 93 1/2"	56" - 100"
Model #	1315-4	1350-6
Item #	0561315400	0561350600
Shipping Weight	16 lbs.*	17 lbs.*

Height Adjustment Mechanism: Tru-Loc™

Base Material: 5 Leg, Polished die cast aluminum, 24" diameter

Casters: 3" hard rubber OR 2 1/2" twin wheel swivel casters



Name

Stainless Steel Pole

Lock Type	Tru-Loc™	Twist Lock	Thumb Control
# of Hooks	2 Hooks		
Caster Heights	2" Rubber	3" Rubber	3" Rubber
Height Adjustments	52" - 94"	74" - 110"	67" - 98"
Model #	1415SS	7792SS	7794SS
Item #	0531415000	0537792000	0517794000
Shipping Weight	16 lbs.*	15 lbs.*	16 lbs.*
# of Hooks	4 Hooks		
Caster Heights	2" Rubber	3" Rubber	3" Rubber
Height Adjustments	52" - 94"	74" - 110"	67" - 98"
Model #	1415SS-4	7792SS-4	7794SS-4
Item #	0531415400	0537792400	0517794400
Shipping Weight	16 lbs.*	16 lbs.*	17 lbs.*

Height Adjustment Mechanism: Tru-Loc™, Twist Lock, Thumb Control

Base Material: 5 Leg, Polished die cast aluminum, 24" diameter

Casters: 2" or 3" hard rubber swivel casters

*Shipping weight with an asterisk is the combined shipping weight of separate parts

MR option available, see MR section for more details



IV Stands

6 Leg

6 LEG IV STANDS

Description: Our 6-leg IV stands are designed for hospital applications requiring heavier loads by using low center of gravity bases. They come in either a chrome or a stainless steel pole with a Tru-Loc™ height adjustment mechanism that allows the pole to reach a minimum of 52" high off the ground and a maximum of 90" off the ground. Our 6 leg IV stands come standard with 4-, 6-, and 8-(rake) removable hooks.

Features Include:

- ✓ 23 3/8" diameter base with low center of gravity for improved stability
- ✓ Heavy duty 3" roller blade swivel casters for easy maneuverability
- ✓ Steel powder coated finished base for durability (many colors available)
- ✓ Accommodates up to 4 infusion pumps and up to 8 IV solution bags while preventing tubing line entanglement



Powder Coated Base

Stainless Steel Base



Name	Chrome Pole	SS Pole	SS Pole
# of Hooks	4 Hooks		
Model #	1370-4	1370SS-4	1371SS-4
Item #	0561370400	0541370400	0541371400
Shipping Weight	29 lbs.*	29 lbs.*	26 lbs.*
# of Hooks	6 Hooks		
Model #	1370-6	1370SS-6	1371SS-6
Item #	0561370600	0541370600	0541371600
Shipping Weight	29 lbs.*	29 lbs.*	26 lbs.*
# of Hooks	8 (rake) Hooks		
Model #	1370-RH	1370SS-RH	1371SS-RH
Item #	0561370RH1	05413700RH	05413710RH
Shipping Weight	29 lbs.*	29 lbs.*	26 lbs.*

*Shipping weight with an asterisk is the combined shipping weight of separate parts

Custom Powder Coated Colors Available Upon Request

Please email us at info@blickman.com

IV Stands

5 Leg

5 LEG WASHABLE IV STAND

Description: Our Hackensack 5-leg IV stand is cart washable – built specifically to withstand high temperatures and cleaning fluids with weep holes in the pole and in the base for fluid drainage. This model comes with a stainless steel pole with a twist lock height adjustment mechanism. Choose from 2-, 4-, and 8-(rake) removable hooks.



Features Include:

- ✓ 22 7/8" diameter, 5 leg black composite base
- ✓ 2 1/2" twin wheel hooded swivel casters
- ✓ 1" outside diameter base pole, and 3/4" outside diameter extension pole
- ✓ Height extends from 74" to 110" off the ground



Name	Washable IV Stand
Lock Type	Twist Lock
# of Hooks	2 Hooks
Model #	7795SS-2
Item #	0539A02302
Shipping Weight	16 lbs.*
# of Hooks	4 Hooks
Model #	7795SS-4
Item #	0539A02304
Shipping Weight	16 lbs.*
# of Hooks	8 Hooks
Model #	7795SS-RH
Item #	0539A023RH
Shipping Weight	16 lbs.*

*Shipping weight with an asterisk is the combined shipping weight of separate parts

IV Stands

Options

IV Hook Configurations



Part #	Description	Shipping Weight
780063700L	2 hooks	2 lbs.
780063800L	4 hooks	2 lbs.
780066900L	6 hooks	2 lbs.
7802808750	8 (rake) hooks	6 lbs.

Lock Options




Thumb Lock

Tru-Lock™

Twist Lock

Base Options

4 Leg Chrome Bases



Standard



Heavyweight

4 Leg Stainless Steel Bases



Standard



Heavyweight

5 Leg Bases



Standard



Washable

6 Leg Bases



Powder Coated



Stainless Steel

IV Stands

Accessories

IV POLE ATTACHMENTS



Wire Basket



Guidance Handle



Power Strip



Accessory Clamp



Drainage Bag Hook



Pump Support Tray



Multi-pump Support



Tank holder

Part #	Description	Shipping Weight
3501389001	Wire Basket	9 lbs.
3501381000	Guidance Handle (MR Option Available)	4 lbs.
9101107600	Power Strip	4 lbs.
7801380000	Accessory Clamp	4 lbs.
7801382000	Drainage Bag Hook	1 lbs.
7801384000	Pump Support Tray	2 lbs.
7801385000	Multi-pump Support	2 lbs.
7801386000	Tank Holder	5 lbs.

MR options available where indicated, see MR section for more details.



IV Stands

Construction Specifications

Construction Specifications

Universal Dimensions	Height Range: 47" - 110" Base Diameter Range: 22" - 24"
Materials	304 stainless steel Chrome
Gauge	Stainless Steel IV Stands: Base Pole: 1" Diameter, 16GA; Extension Pole: ¾" Diameter, 18GA Exception: 1370/1371 series Base Pole: 1 ¼" Diameter, 16 GA; Extension Pole: 1" Diameter, 18GA
Welding	All welding by heliarc method and exposed welds are ground smooth
Finish	Exposed surfaces are free from pit marks, weld seams, scale and are polished with #4 polish to a satin finish
Casters	See page 9
Notes	MR conditional IV stand option available where indicated

Shipping Information

All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.


Note for: <i>IV Stands</i>	Parts shipped separately to avoid damage and lower costs. Shipping weight with an asterisk is the combined shipping weight of separate parts. Some assembly required.
--------------------------------------	---

THE BLICKMAN DIFFERENCE

IV Irrigation Safety Systems

- Our IV Irrigation Safety Systems (IVTs) offer superior safety, efficiency, and financial value for fluid intensive IV irrigation procedures, such as arthroscopic, hysteroscopic, endoscopic, TURP, etc.
- They maintain continuous fluid delivery by offering infinitely adjustable heights for up to eight 3 liter or 5 liter IV bags on four independent channels.
- Their easy, one handed operation allows nurses to attach IV bags at comfortable heights, starting at 5 ft., and then raise bags up to 8 ft. (or to 9 ft. with custom extender) simply by pushing down on "squeeze/release" handles, an ergonomic solution that meets OSHA standards and greatly reduces the threat of back injuries.

Key Product Features

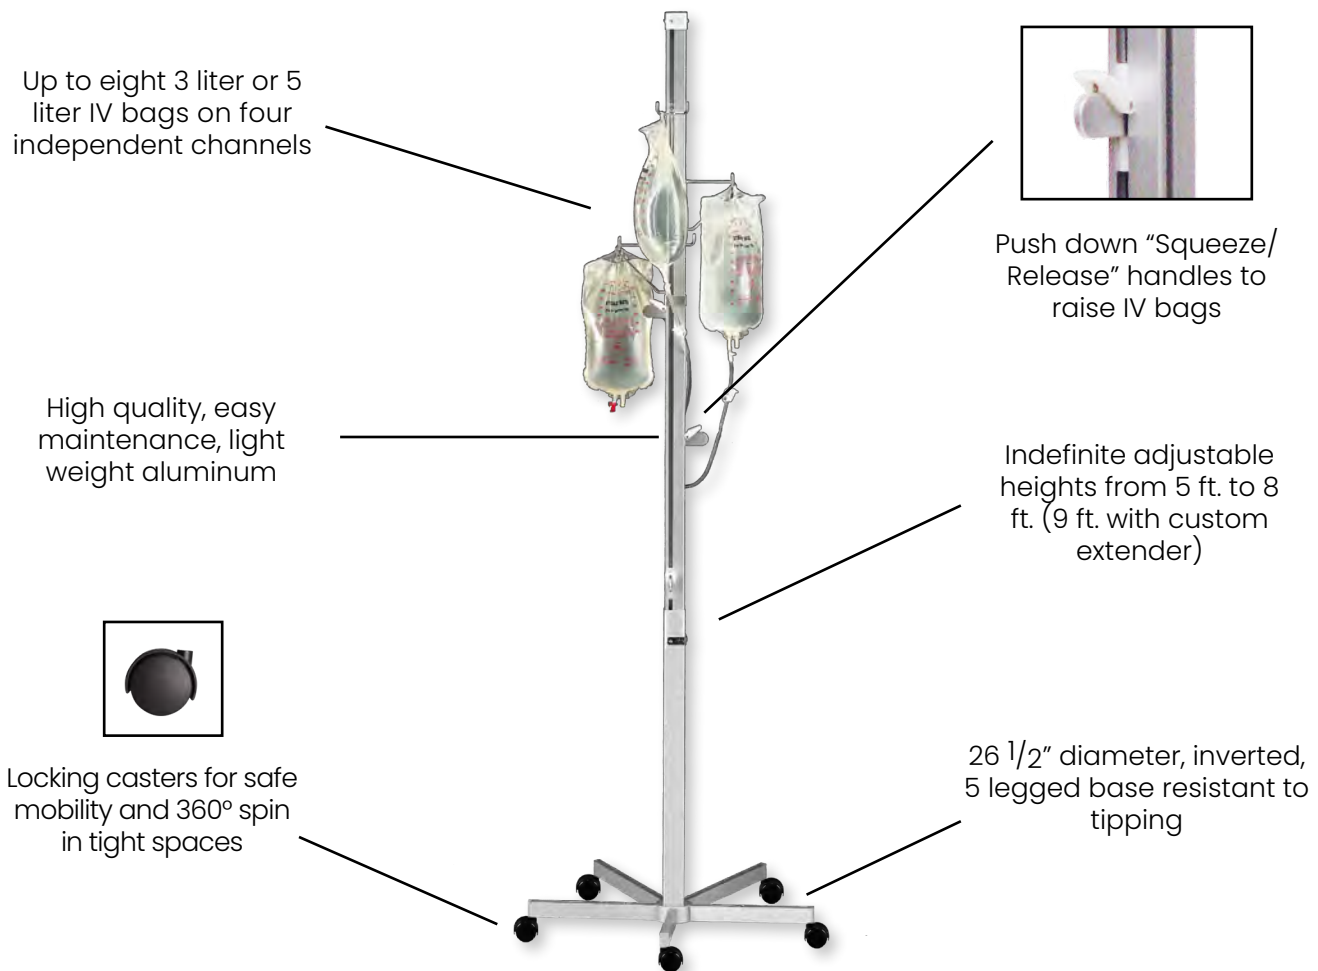

WHY CHOOSE OUR IVT?



Safe:

- This ergonomic solution meets OSHA standards and greatly reduces the threat of back injuries with its one-handed operation which allows nurses to attach IV bags at comfortable heights, simply by pushing down on “squeeze/release” handles, an
- Hard anodized aluminum construction with stain resistant finishes makes it so that no surfaces can chip, flake, or rust to introduce particle matter into a sterile or surgical environment.
- The lowest positions are cushioned by shock absorbers, thus sparing the common banging known to occur with the standard IV poles, which results in tearing of bag tabs and spilling remaining fluids onto the O.R. floor.
- The steady, five-legged bases resist potential tipping hazards, eliminating the need for “sand bagging”.

Efficient:

- There are no electrical aspects that require overnight charging, so they are always ready, whenever you are ready.
- The ability to stagger heights of up to eight 3 liter or 5 liter bags ensures continuous flow of liquids, as it allows you to change an IV bag, while the other bags are still irrigating.
- Easy to clean and maintain
- Compact footprint frees up valuable space on the O.R. floor.

Affordable:


- Our IV Irrigation systems are value leaders among a few comparable models, saving you up to **\$50/procedure** on IV tubes vs. those required with far more expensive, pump driven systems.

Irrigation Systems

IVTs

Description: We offer two types of IVTs, one with 2 hooks, which holds up to 4 IV bags and one with 4 hooks, which holds up to 8 IV bags. Hooks can raise and lower from 67" to 81". They travel on black plastic twin wheel hooded swivel casters. Both IVTs come with 26 1/2" diameter inverted, 5 leg base.

Our IVT stands have the same dimensions:
Width: 12 3/4" x Height: 89" x Depth: 12 3/4"
Note: these dimensions do not include the base

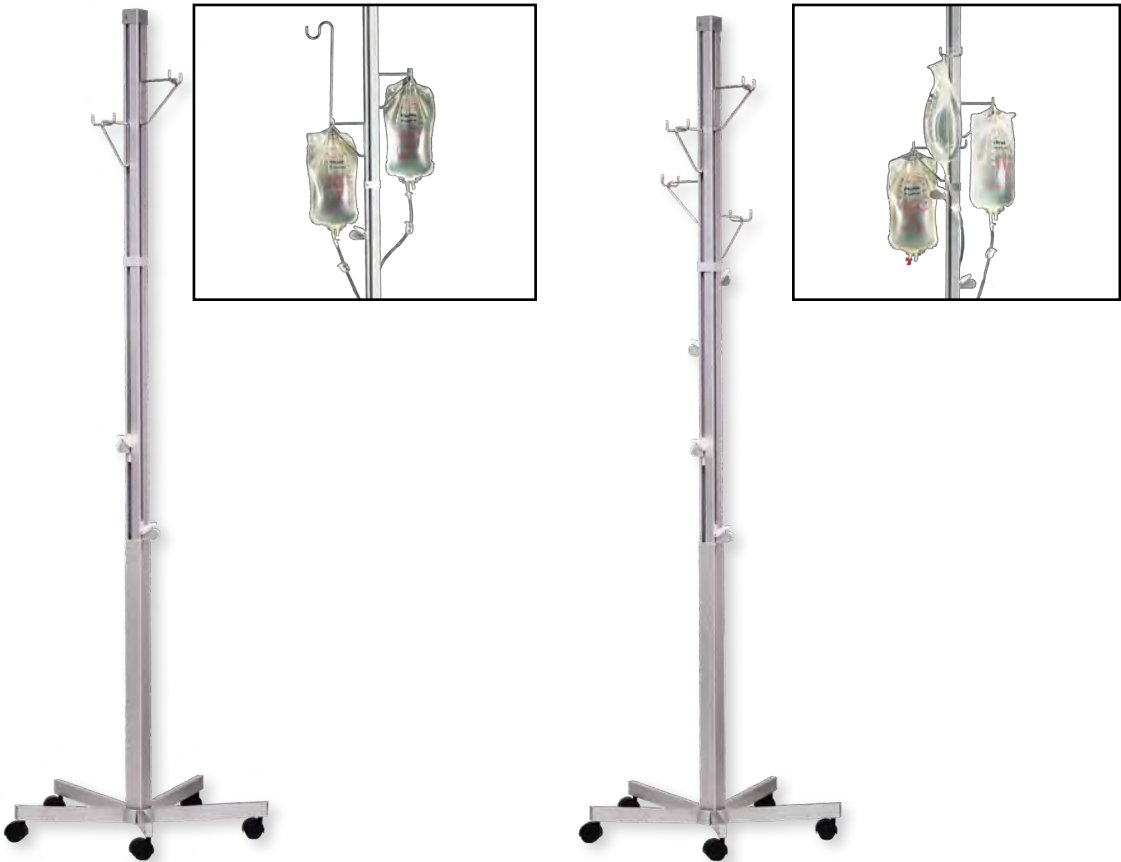

Name	IVT 2 Channels	IVT 4 Channels
Item #	IVT-2	IVT-4
Model #	0541110200	0541110100
Shipping Weight	85 lbs.*	85 lbs.*

For Custom Extender
Please email us at info@blickman.com

*Shipping weight with an asterisk is the combined shipping weight of separate parts



Irrigation Systems

Construction Specifications

Construction Specifications

Universal Dimensions	Tower: Width: 12 3/4" x Height: 89" x Depth: 12 3/4" Base Diameter: 26 1/2" Height Range of Hooks: 67" - 81"
----------------------	--

Materials	Hard anodized aluminum
-----------	------------------------

Gauge	N/A
-------	-----

Welding	N/A
---------	-----

Finish	Stain resistant finishes
--------	--------------------------

Casters	2" black plastic, twin wheel, hooded swivel casters
---------	---

Notes	
-------	--

Shipping Information

All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

Note for: <i>IV Stands</i>	Parts shipped separately to avoid damage and lower costs. Some assembly required.
--------------------------------------	--

BLICKMAN



Mayo Stands

Maximum utility in minimal space

Includes:


- Chrome Mayo stands
- Stainless steel Mayo stands



THE BLICKMAN DIFFERENCE

- Our Mayo stands have evolved to meet the needs of the marketplace for maximum utility in an increasingly crowded surgical environment.
- We have an array of options with varying material, bases, shapes, and adjustment mechanisms to suit your needs.
- All of our Mayo stands are mobile and use 2" roller blade, hard rubber, or twin wheel plastic hooded casters.

Key Product Features

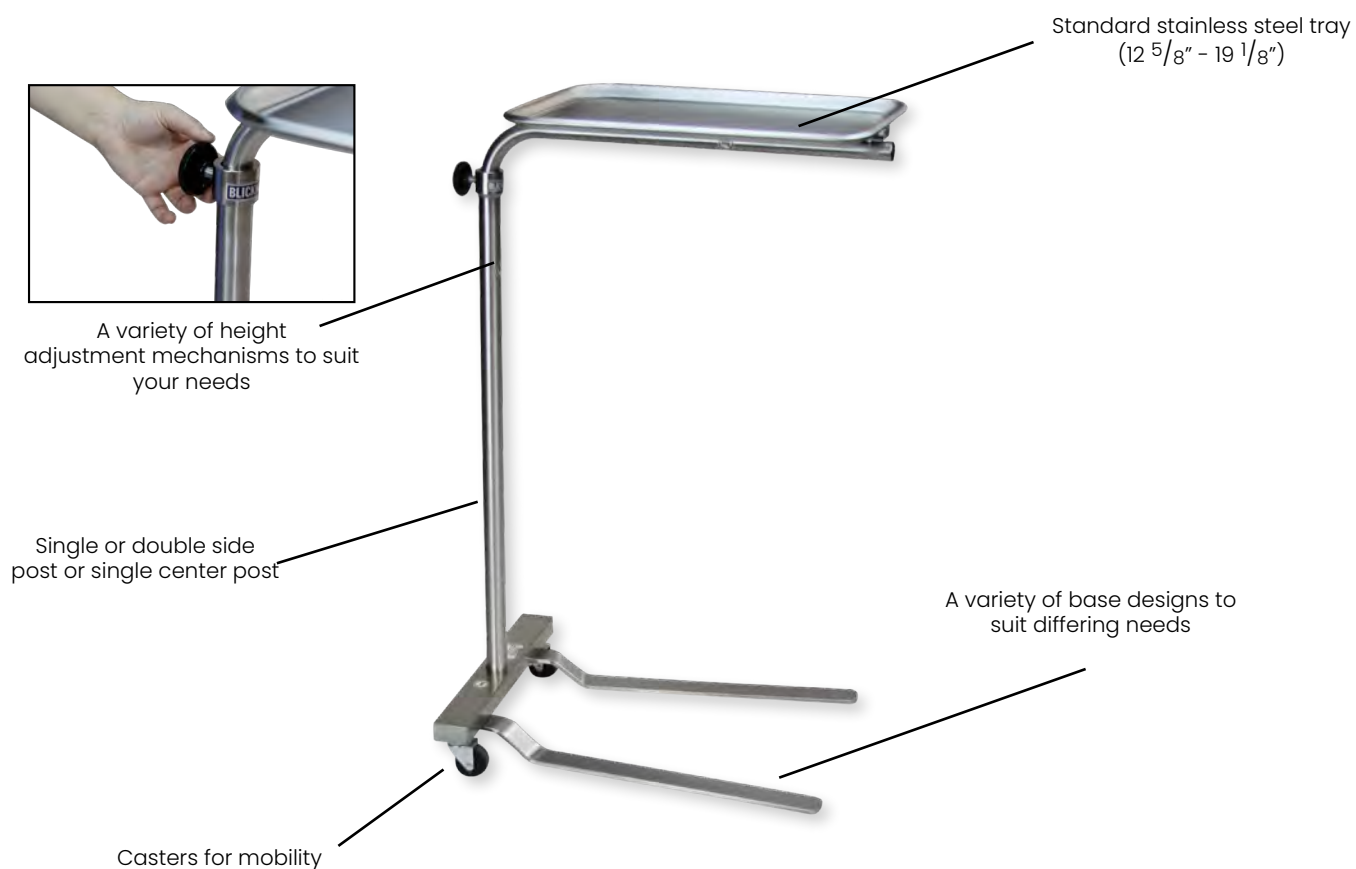

2" Rollerblade Casters



2" Hard Rubber Casters



2" Twin Wheel Hooded Casters



Mayo Stands

Chrome

CHROME MAYO STANDS

Description: Each of our chrome Mayo stands contain a 12 $\frac{1}{8}$ " x 19 $\frac{1}{8}$ " stainless steel tray and are height adjustable using the Tru-Loc™ friction knob. We offer different base and pole set ups to meet your varying needs.

Middle Pole

Base: Five leg cast aluminum base with wall savers™ and 2" twin wheel hooded casters



Double Pole

Base: Chrome loop base with two 2" twin wheel hooded back casters



Single Pole

Base: Two pronged chrome base with single hard rubber back casters



Name	Middle Pole	Double Pole	Single Pole
Height Adjustment	29 $\frac{1}{2}$ " - 49"	34 $\frac{1}{2}$ " - 54"	34 $\frac{1}{2}$ " - 54"
Model #	1501	1510	1515
Item #	0661501000	0661510000	0661515000
Shipping Weight	14 lbs.	18 lbs.	12 lbs.

Mayo Stands Stainless Steel

NEWARK MAYO STANDS

Description: Each of our stainless steel Mayo stands contain a 12 1/8" x 19 1/8" stainless steel tray and are height adjustable using the Tru-Loc™ friction knob. We offer different base set ups to meet your varying needs.

Lightweight

Base: Two pronged stainless steel base with two hard rubber back casters



Standard



Base: Two pronged stainless steel base with two roller blade back casters



Four Caster

Base: Two pronged stainless steel base with four roller blade casters



Name	Lightweight	 Standard	 Four Caster
Height Adjustment	37 1/4" - 64"	39 1/2" - 62"	39 1/2" - 62"
Model #	1520SS	8841SS	8841MR
Item #	0671520000	0638841000	0638841200
Shipping Weight	26 lbs.	36 lbs.	39 lbs.




Mayo Stands Stainless Steel

BENJAMIN MAYO STAND

Description: Our Benjamin Mayo stand design is made for ease and durability. Our state of the art double post design minimizes lateral movement and increases overall stability. We offer this design in three different tray sizes.



Via a foot operated mechanism, you can adjust the height from 39 1/2" to 62" high off the ground. A guard over the foot prevents accidental release.

Benjamin Mayo Stands		
Name		
Tray Size	12 5/8" x 19 1/8" (Standard)	
Model #	8867SS	
Item #	0668867000	
Shipping Weight	40 lbs.	
Tray Size	16" x 21"	
Model #	8869SS	
Item #	0668869000	
Shipping Weight	41 lbs.	
Tray Size	20" x 25"	
Model #	8871SS	
Item #	0668871000	
Shipping Weight	43 lbs.	



Mayo Stands

Construction Specifications

Construction Specifications

Universal Dimensions	Standard Tray Size: Width: 12 5/8" x Depth: 19 1/8"
Materials	304 stainless steel Chrome
Gauge	All contain stainless steel trays: 20GA Benjamin Mayo Stands: 3/4" diameter, 18GA tubes, 1/8" base Newark Mayo Stands: 1520SS: 1 1/4" diameter, 18GA tube, weighted base 8841SS/8848SS: 1" diameter, 16GA tube, 3/8" base
Welding	All welding by heliarc method and exposed welds are ground smooth
Finish	Exposed surfaces are free from pit marks, weld seams, scale and are polished with #4 polish to a satin finish
Casters	2" plastic hooded twin wheel, hard rubber, or roller blade casters
Notes	MR conditional Mayo stands available where indicated

Shipping Information

All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

BLICKMAN



MR Conditional Room

Broadest line of MR equipment

Includes:

- Exam Stools
- Hampers
- Foot Stools
- Stands
- Tables



THE BLICKMAN DIFFERENCE

How we make our products “MR Conditional”

We manufacture products primarily from type 304 stainless steel, which is regarded as non-magnetic in its original, annealed condition. Forming the metal tends to bring out the magnetizing properties, so we demagnetize the metal via solution annealing and a Nitrogen quenching process. We also make certain to employ, where appropriate, non-metal parts and components such as fasteners, hinges, and casters.

Broadest Line of MR Equipment in the Healthcare Market

- Padded stools on rubber tips or on casters
- Single platform or double platform foot stools with or without handrails
- Rolling hampers, with or without plastic lids
- Rolling IV stands, mayo stands, solution stands, and kickbuckets
- Instrument tables and utility tables in a variety of sizes with or without shelves/casters

Fully compliant with the New ASTM Standards

- All Blickman products are labeled MR conditional or *NOT* MR conditional.
- All Blickman MR Equipment is suitable for use throughout the entire MR suite, including anywhere within the vicinity of 3.0 Tesla scanners.



Backed by our Limited Lifetime Warranty

Since the late 1990s, our products, legendary for high quality and supported by an industry-unique Limited Lifetime Warranty, have performed without incident. Our exceptional record of safety in the imaging industry is a direct result of our consistent adherence to guidelines set by the Center for Devices & Radiological Health (CDHR) - Magnetic Resonance Group, part of the U.S. Food and Drug Administration (FDA).



For details, please visit:

<https://www.blickman.com/limited-lifetime-warranty>

MR Conditional

Exam Stools

EXAM STOOL

Description: Our MR conditional exam stool is industry standard, fully welded, stainless steel construction. Sit comfortably on 15” diameter, 3” thick padded seats. Choose between stationary feet tips or casters for mobility. Height is 21” on feet tips and 23” on MR casters.



Name	MR Conditional Stool	MR Conditional Stool with Casters
Item #	7445MR	7445MR-C
Model #	1027445000	1027445001
Shipping Weight	14 lbs.	16 lbs.

MR Conditional

Hamper

HAMPER

Description: Our MR conditional round stainless steel hamper travels easily on 2" MR casters and is compatible with our 18" nylon hamper bags and our water soluble hamper bags.



Name	MR Conditional Hamper
Model #	7772MR
Item #	0927772400
Shipping Weight	20 lbs.

MR Conditional

Foot Stools

KENT FOOT STOOLS

Description: Our MR conditional Kent foot stools include one step 8" off the ground. They are industry standard, fully welded, stainless steel construction with non-slip rubber treads and feet tips. 18" and 30" width sizes are available. Include a 41" tall handrail for additional support.



Name	MR Conditional 18" Kent Stool	MR Conditional 30" Kent Stool
With Handrail (41" high)		
Dimensions (WxHxD)	18" x 41" x 12"	30" x 41" x 12"
Model #	7757MR-HR	7761MR-HR
Item #	1017757100	1017761100
Shipping Weight	20 lbs.*	30 lbs.*
Without Handrail		
Dimensions (WxHxD)	18" x 8" x 12"	30" x 8" x 12"
Model #	7757MR	7761MR
Item #	1017757000	1017761000
Shipping Weight	11 lbs.	20 lbs.

*Shipping weight with an asterisk is the combined shipping weight of separate parts

MR Conditional

Two Step

TWO STEP FOOT STOOLS

Description: Our MR conditional two step foot stools are industry standard, fully welded, stainless steel construction with H-braces for additional reinforcement, non-slip rubber treads for secure footing, and feet tips for firm floor placement.



**Two Step Foot Stool
with Side Handrails**

Step Surface Areas

Top Step: 36" x 12"
Bottom Step: 36" x 24"

Heights of Steps

Top Step: 15 3/4"
Bottom Step: 8"

Name	Two Step Foot Stool
	With Handrails (41" high)
Model #	7764MR-HR
Item #	1012041096
Shipping Weight	65 lbs.
	Two Step



**The Donnelly
with Handrail**

Step Surface Areas

Top Step: 24" x 8"
Bottom Step: 24" x 16"

Heights of Steps

Top Step: 15 3/4"
Bottom Step: 8"

Name	The Donnelly
	With Handrails (41" high)
Model #	7763MR-HR
Item #	1017763100
Shipping Weight	40 lbs.*
	Without Handrail
Model #	7763MR
Item #	1017763000
Shipping Weight	27 lbs.

*Shipping weight with an asterisk is the combined shipping weight of separate parts

MR Conditional Stands

NEWARK MAYO STAND


Description: Our stainless steel MR conditional Mayo stand has a 12 5/8" x 19 1/8" stainless steel tray and travels easily on 2" MR casters. It is height adjustable from 39 1/2" to 62" using the Tru-Loc™ friction knob.



Name	MR Conditional Newark Mayo Stand
Model #	8841MR
Item #	0638841200
Shipping Weight	36 lbs.

IV STAND

Description: Our 5 leg MR conditional IV stand consists of a stainless steel pole on a 24" diameter, polished diecast aluminum base with Wall Saver™ caps and 2" MR casters. It is height adjustable from 74" to 110" via a twist lock adjustment mechanism. Choose from either 2- or 4-hooks or contact customer service for 6 or 8 (rake) hooks.

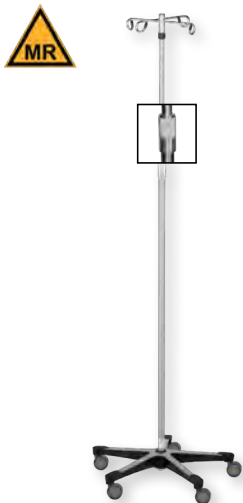

Name	MR Conditional IV Stands
# of Hooks	2 Hooks
Model #	7792MR-2
Item #	0537792002
Shipping Weight	16 lbs.
# of Hooks	4 Hooks
Model #	7792MR-4
Item #	0537792004
Shipping Weight	17 lbs.

MR Push Handle for MR IV Stands



Name	Model #	Item #	Ship Weight
Push Handle	1381MR	3537426350	5 lbs.

MR Conditional Stands

SOLUTION STANDS

Description: We offer two types of stainless steel MR conditional solution stands: a single basin model and a double basin model. Our solution stands are 33" tall offering compatibility with surgical table heights and reduced back stress. Choose between a lower shelf or an H-brace for added storage and support.



Single Basin

Dimensions:

Width: 15" x Height: 33" x Depth: 15"



Double Basin

Dimensions:

Width: 29" x Height: 33" x Depth: 15"

Name	MR Conditional Single Basin SS	MR Conditional Double Basin SS
Supporting Frame	Shelf	
Model #	7807MR	7808MR
Item #	0717807066	0727808066
Shipping Weight	20 lbs.	33 lbs.
Supporting Frame	H-Brace	
Model #	7807MR-HB	7808MR-HB
Item #	0717807166	0727808166
Shipping Weight	19 lbs.	24 lbs.

Note: SS denotes solution stand

KICKBUCKET

Description: Our stainless steel MR conditional kickbucket consists of a continuous encircling rubber bumper, which helps prevent tipping, wall scuff marks, and noise. A stainless steel cross brace provides excellent protection and a secure hold of a heavy gauge 13 qt. pail, and 2" MR casters for mobility.



Name	Model #	Item #	Ship Weight
MR Conditional Lenox Kickbucket with Pail	7766MR	0817766066	15 lbs.

MR Conditional

Tables

NESTED TABLES

Description: Our MR conditional nested instrument tables are space saving alternatives with a unique design that requires a mere 8 square feet of floor space, but yields 31 square feet of usable work space. All nested tables travel on 2" MR casters.



Name	Dimensions (WxHxD)	Model #	Item #	Ship Weight
Complete Set of 6	8 Sq. Ft. of Floor Space 31 Sq. Ft. of Work Space	7821MR	0197821000	255 lbs.
ORDER SEPARATELY				
Largest	48" x 42" x 24"	7822MR	0197822100	56 lbs.
Second	44" x 40" x 22"	7823MR	0197823100	52 lbs.
Third	40" x 38" x 20"	7824MR	0197824100	51 lbs.
Fourth	36" x 36" x 18"	7825MR	0197825100	37 lbs.
Fifth	32" x 34" x 16"	7826MR	0197826100	34 lbs.
Smallest	28" x 32" x 14"	7827MR	0197827100	32 lbs.

MR Conditional

Tables

INSTRUMENT TABLES

Description: Our MR conditional instrument tables offer complete 18 gauge, 304 stainless steel construction. A sanitary closed top helps prevent bacterial build up. Sealed reinforcing channels provide increased rigidity. All tables are at an ergonomic reinforcing height of 34" tall with 1 1/4" diameter legs that are fully welded for strength and stability. Each MR conditional instrument table travels on 2" MR casters. There is a 16" clearance between shelves. Our 4 most common sizes are listed below, however we offer a wide variety of other sizes which you can order by calling customer service or visiting our website.



Surface Area	MR Conditional Sawyer Table	MR Conditional Howard Table
20" x 16"		
Model #	7840MR	7830MR
Item #	0197840100	0187830100
Shipping Weight	28 lbs.	32 lbs.
36" x 24"		
Model #	7843MR	7833MR
Item #	0197843100	0187833100
Shipping Weight	48 lbs.	56 lbs.
48" x 24"		
Model #	7845MR	7835MR
Item #	0197845100	0187835100
Shipping Weight	56 lbs.	69 lbs.
60" x 24"		
Model #	7846MR	7836MR
Item #	0197846100	0187836100
Shipping Weight	189 lbs.	200 lbs.

Custom Dimensions Available Upon Request

Please email us at info@blickman.com

MR Conditional

Utility Carts

UTILITY CARTS

Description: Our MR conditional utility carts are made out of industry standard, fully welded, stainless steel construction. They feature two to three easy-access storage shelves and two ergonomic push handles. Optional IV pole attachments available for every model.



Name	Medium Duty End Rails Utility Cart	Medium Duty Side Rails Utility Cart	Heavy Duty Utility Cart
MR Conditional Standard Models			
Item #	7536SS-MR	7535SS-MR	7537SS-MR
Model #	2497536000	2497535000	2497537000
Shipping Weight	40 lbs.	47 lbs.	43 lbs.
MR Conditional Models with IV Attachments			
Item #	7536SS-IV-MR	7535SS-IV-MR	7537SS-IV-MR
Model #	2497536001	2497535001	2497537001
Shipping Weight	45 lbs.	52 lbs.	48 lbs.

MR Conditional

Specifications

Construction Specifications

All products in this Blickman MR Conditional Room brochure meet the revised “MR Conditional” definition as stated in ASTM standard F2503.

The configuration and design safety of the components of these Blickman products in the MR environment were verified in accordance with ASTM standard F2052-06: “Measurement of Magnetically-induced Displacement Force in the MR Environment.”

The “paramagnetic” material property constraints of these Blickman products were determined through testing conducted by an independent lab in accordance with ASTM standard A773/A773M-01, employing a computer automated, soft magnetic, hysteresis graph system.

A low- μ permeability indicator gage, in compliance with ASTM standard A342/A342M, is used for final factory acceptance of these Blickman products.

Identification of these Blickman products conforms to the ASTM standard F2503-05: “Marking Medical Devices and Other Items for Safety in the MR Environment.”

Shipping Information

All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

BLICKMAN



Scrub Sinks

Hands free multi-station operation

Includes:

- Windsor Scrub Sinks
- Lodi Scrub Sinks
- Accessories




THE BLICKMAN DIFFERENCE

Scrub Sinks

- Our two scrub sink models, the Windsor and the Lodi, are each available with single, dual, and triple stations. A four-station unit is also available in the Windsor model.
- They have deep sink bowls with sound-deadened enclosed double walled panels that are angled in to divert water splashes along with spouts positioned toward the rear of the sink. Standard gooseneck faucets included.
- All operation options are hands free. The Lodi scrub sinks have infrared water control and knee-action water and soap dispensers, and the Windsor scrub sinks come standard with knee-action control, but they are also available in foot, elbow, and infrared sensor controls.

Key Product Features

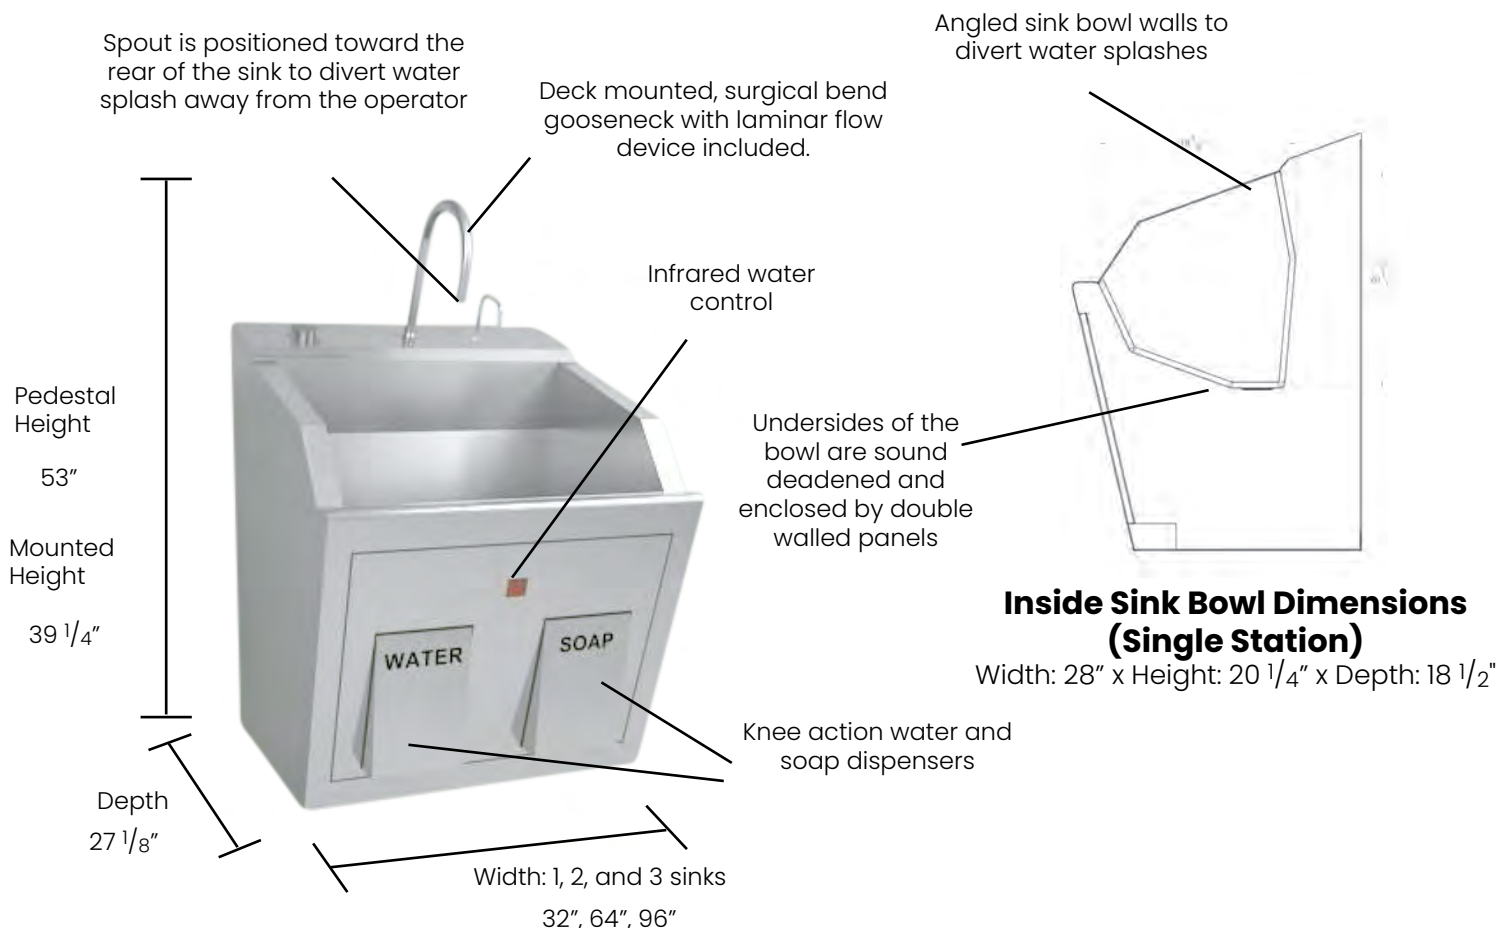

Scrub Sinks

Windsor

WINDSOR SCRUB SINKS

Description: Our Windsor scrub sinks are all wall mounted and utilize one undivided sink bowl. Choose from our four different hands free operations: knee, foot, elbow, or infrared. Standard gooseneck faucets included.

Inside Sink Bowl Dimensions

Width: 21 3/4" x Height: 8" x Depth: 14 1/2"



Width
25"



Width
47"



Width
69"



Width
91"

Name	1 Station	2 Stations	3 Stations	4 Stations
Knee Action				
Model #	7878SS-KA	7879SS-KA	7880SS-KA	7881SS-KA
Item #	1317878000	1317879000	1317880000	1317881000
Shipping Weight	65 lbs.	145 lbs.	190 lbs.	305 lbs.
Foot Action				
Model #	7878SS-FO	7879SS-FO	7880SS-FO	7881SS-FO
Item #	1317878003	1317879003	1317880003	1317881003
Shipping Weight	65 lbs.	145 lbs.	190 lbs.	305 lbs.
Elbow Action				
Model #	7878SS-EA	7879SS-EA	7880SS-EA	7881SS-EA
Item #	1317878004	1317879004	1317880004	1317881004
Shipping Weight	65 lbs.	145 lbs.	190 lbs.	305 lbs.
Infrared				
Model #	7878SS-IF	7879SS-IF	7880SS-IF	7881SS-IF
Item #	1317878001	1317879001	1317880001	1317881001
Shipping Weight	65 lbs.	145 lbs.	190 lbs.	305 lbs.

Scrub Sinks

Lodi

LODI SCRUB SINKS

Description: Our Lodi scrub sinks come standard with both infrared water control and knee-action water and soap dispensers. All units are available in either pedestal or wall-mounted configurations. Standard gooseneck faucets included.



Width
32"



Width
64"



Width
96"



Height
53"



Height
39 1/4"

Name	1 Station	2 Stations	3 Stations
Pedestal			
Model #	9881SSP	9882SSP	9883SSP
Item #	1339881P00	1339882P00	1339883P00
Shipping Weight	275 lbs.	420 lbs.	600 lbs.
Wall Mounted			
Model #	9881SSW	9882SSW	9883SSW
Item #	1339881W00	1339882W00	1339883W00
Shipping Weight	215 lbs.	360 lbs.	570 lbs.



Scrub Sinks

Accessories

LODI SCRUB SINK ACCESSORIES

- Factory Installed Options -



Digital Timer



Eyewash

- For Wall Mount Installation -



Chair Carrier
For Wall Mount Installation

# of Stations	One	Two	Three
Part #	4301224751	4301224752	4301224753
Shipping Weight	47 lbs.	119 lbs.	141 lbs.

Scrub Sinks

Construction Specifications

Construction Specifications

Standard Dimensions **Lodi:** (W) 32", 64", 96" x (D) 27 1/4" x (H): 39 1/4", 53"
Internal Sink (Single Station): 28" x 18 1/2" x 20 1/4"
Windsor: (W) 25", 47", 69", 91" x (D) 18 1/2" x (H): 15 3/4"
Internal Sink: 21 3/4" x 8" x 14 1/2"

Materials/
Gauge 304 stainless steel
Lodi: Mix of 16GA and 14GA
Windsor: 16 GA
Double/Triple Station Lodi Scrub Sinks: Plastic Dividers

Welding All welding by heliarc method and exposed welds are ground smooth

Finish Exposed surfaces are free from pit marks, weld seams, scale and are polished with #4 polish to a satin finish

Electrical Available in standard 100/120 VAC input or 220/240 VAC
Units are FDA registered and conform to standards for Safety Medical Electrical Equipment UL 606011 (US) and CSA C22.2 #601.1M90 (Canada)
Units are cord connected with a hospital grade cap

Casters N/A

Shipping Information

All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

BLICKMAN



Solution Stands/ Receptacles

Roll, collect, dispose

Includes:

- Solution Stands
- Kickbucket
- Receptacle



THE BLICKMAN DIFFERENCE

- Our high quality, heavy-gauge, noise-reducing, solution stands and receptacles ensure your solutions and waste products are easily collected and disposed of in these easy-to-move, easy-to-clean product.
- Our solution stands and receptacles move effortlessly and quietly on 2" swivel casters, and are made out of our high-quality, easy-to-clean 304 stainless steel with MR conditional options available for both.
- Our solution stands are 33" high for compatibility with surgical table heights and are in the safe zone for reduced back stress, and our receptacles are low to the floor to pass under surgical tables and make it easy to drop waste into without reaching around the table.
- Our basins and pails are removable for both the solution stands and receptacles that are held in place by rubber bumpers that also help prevent noise from metal on metal contact.

Key Product Features



Solution Stands

Description: We offer two types of stainless steel solution stands: a single basin model and a double basin model. Our solution stands are 33" tall offering compatibility with surgical table heights and are in the safe zone for reduced back stress. Choose between a lower shelf or an H-brace for added storage and support. MR conditional models available.



Dimensions:





Width: 15" x Height: 33" x Depth: 15"



Dimensions:

Width: 29" x Height: 33" x Depth: 15"



Name	Single Basin Solution Stand			Double Basin Solution Stand	
			Shelf		
Model #	7807SS	7807MR		7808SS	7808MR
Item #	0717807000	0717807066		0727808000	0727808066
Shipping Weight	20 lbs.	20 lbs.		33 lbs.	33 lbs.
H-Brace					
Model #	7807SS-HB	7807MR-HB		7808SS-HB	7808MR-HB
Item #	0717807100	0717807166		0727808100	0727808166
Shipping Weight	19 lbs.	19 lbs.		24 lbs.	24 lbs.

Solution Basin Also Sold Separately



Name	Model #	Item #	Ship Weight
8.5 qt. Solution Basin Only	SB-1	9737370120	3 lbs.

Receptacles

Description: Our stainless steel kickbucket consists of a continuous encircling rubber bumper, which helps prevent tipping, wall scuff marks, and noise. A stainless steel cross brace provides excellent protection, securely holds a heavy gauge 13 qt. pail, as well as roller blade casters for mobility.

Parts Also
Sold Separately

Parts Also
Sold Separately



#KB-1



#7766NP

Kickbucket

13 qt. Pail



#SB-1





#8766NP

Receptacle

8.5 qt. Solution Basin

KICKBUCKET

Name	Model #	Item #	Ship Weight
Lenox Kickbucket with Pail 	7766SS	0817766000	12 lbs.
Lenox Kickbucket with Pail 	7766MR	0817766066	12 lbs.

ORDER SEPARATELY

Lenox Kickbucket Frame Only	7766NP	0817766001	9 lbs.
13 qt. Pail Only	KB-1	9701920000	4 lbs.

RECEPTACLE

Name	Model #	Item #	Ship Weight
Sponge Receptacle with Basin	8766SS	0828766000	11 lbs.

ORDER SEPARATELY

Sponge Receptacle Frame Only	8766NP	0828766001	9 lbs.
8.5 qt. Solution Basin Only	SB-1	9737370120	3 lbs.



Solution Stands

Construction Specifications

Construction Specifications

Universal Dimensions	Solution Stands: 15", 29" x 33" x 15" Solution Basin: 8.5 qts. Pail: 13 qts.
Materials	304 stainless steel
Gauge	Solution Stand Frame: 1" diameter tube, 16GA Solution Stand Shelf: 20GA Pail: 22GA; Basin: 14GA
Welding	All welding by heliarc method and exposed welds are ground smooth
Finish	Exposed surfaces are free from pit marks, weld seams, scale and are polished with #4 polish to a satin finish
Casters	2" swivel casters
Notes	MR conditional options available where indicated

Shipping Information

All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

BLICKMAN



Surgical Utensils

Includes:

- Dressing Jars
- Emesis Basins
- Ointment Jars
- Bucket Pail
- Solution Basins
- Instrument Trays
- Catheter Tray
- Iodine Cups
- Medicine Cup
- Graduated Measuring Cups

Safe, sterile, stainless steel



THE BLICKMAN DIFFERENCE

- We offer a comprehensive range of surgical utensils to complement the high-end quality of our hospital equipment.
- We offer utensils that function to hold other surgical materials and liquids of various types.
- All utensils are stainless steel and welded smooth to ensure sterility for surgery.
- Our measuring utensils have units of measurement commonly used in the medical industry etched inside.

Key Product Features



Surgical Utensils

Description: Our surgical utensils are solid stainless steel and are great for sterile use in the OR.



Dressing Jars
DJ1-7



Emesis Basins
EB1-4



Ointment Jar
OJ-1

Model #	Item #	Capacity/Dimensions	Shipping Weight
Dressing Jars			
DJ-1	9788000001	0.5 liters	1 lbs.
DJ-2	9788010002	1.0 liters	1 lbs.
DJ-3	9788020003	1.9 liters	2 lbs.
DJ-4	9788030004	2.8 liters	2 lbs.
DJ-5	9788040005	4.0 liters	2 lbs.
DJ-6	9788060006	5.7 liters	2 lbs.
DJ-7	9788080007	7.6 liters	3 lbs.
Emesis Basins			
EB-1	9717090400	12 oz.	1 lbs.
EB-2	9720595450	16 oz.	1 lbs.
EB-3	9725511555	28 oz.	1 lbs.
EB-4	9730514065	56 oz.	1 lbs.
Ointment Jar			
OJ-1	9787720001	8 oz.	1 lbs.



Bucket Pail
KB-1



Solution Basins
SB-1

Model #	Item #	Capacity/Dimensions	Shipping Weight
Bucket Pail			
KB-1	9701920000	12.3 liters	4 lbs.
Solution Basin			
SB-1	9737370120	8 liters	3 lbs.
1830	9701830000	6.5 liters	2 lbs.

Surgical Utensils

Description: Our surgical utensils are solid stainless steel and are great for sterile use in the OR.



Instrument Trays
IT1015-2520



Catheter Tray
CT1, IT, IC

Model #	Item #	Capacity/Dimensions	Shipping Weight
Instrument Trays			
IT1015	9710015001	15" W x 10" D	3 lbs.
IT1621	9716002100	21" W x 16" D	4 lbs.
IT1525	3603915250	25" W x 16" D	5 lbs.
IT2025	3603920251	25" W x 20" D	6 lbs.
IT1219	9719126250	19" W x 12 1/2" D	4 lbs.
IT2520	9736392025	20" W x 25" D	6 lbs.
Catheter Tray			
CT-1	9785030101	8 1/2" W x 3" D x 1 1/2" H	1 lbs.
CT-IT	9782831000	8 1/2" W x 3" D x 1" H	1 lbs.
CT-IC	9782832000	8 1/2" W x 3" D x 1 1/2" H	1 lbs.



Iodine Cups
IC1-2



Medicine Cup
MC-1



Graduated
Measuring Cups
GM1-3

Model #	Item #	Capacity/Dimensions	Shipping Weight
Iodine Cups			
IC-1	9775500002	6 oz.	1 lbs.
IC-2	9710565001	14 oz.	1 lbs.
Medicine Cup			
MC-1	9784920001	2 oz.	1 lbs.
Graduated Measuring Cups			
GM-1	9795160001	16 oz.	1 lbs.
GM-2	9795320002	32 oz.	1 lbs.
GM-3	9795640003	64 oz.	1 lbs.



Surgical Utensils

Construction Specifications

Construction Specifications

Standard Dimensions	N/A
Material	304 stainless steel
Gauge	20GA: Graduated Measuring Cup, Instrument trays (exception 15"x10" Instrument Tray is 24GA) 22GA: Dressing Jars, Emesis Basins, Ointment Jar, Bucket Pail, Solution Basin, Catheter Tray and Cover, Iodine Cups, Graduated Measuring Cups
Welding	All welding by heliarc method and exposed welds are ground smooth
Finish	Exposed surfaces are free from pit marks, weld seams, scale and are polished with #4 polish to a satin finish
Casters	N/A

Shipping Information

All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

BLICKMAN



Tables

Adaptable work and prep surfaces

Includes:

- Instrument Tables
- Utility Tables
- Work Tables




THE BLICKMAN DIFFERENCE

Adjustable Tables

- Our adjustable tables are instrument tables designed to straddle the OR table using either manual or motorized adjustable height mechanisms to accommodate changes in the table position during neuro, cardiac, and orthopedic surgery, as well as varying heights of personnel during general surgery.
- You can customize the tabletop dimensions to fit your differing surface area needs and the leg clearance dimensions to fit your differing OR table dimensions.
- Models are made out of stainless steel and include casters for mobility.
- The motorized table moves along telescoping aluminum lifting columns.

Key Product Features

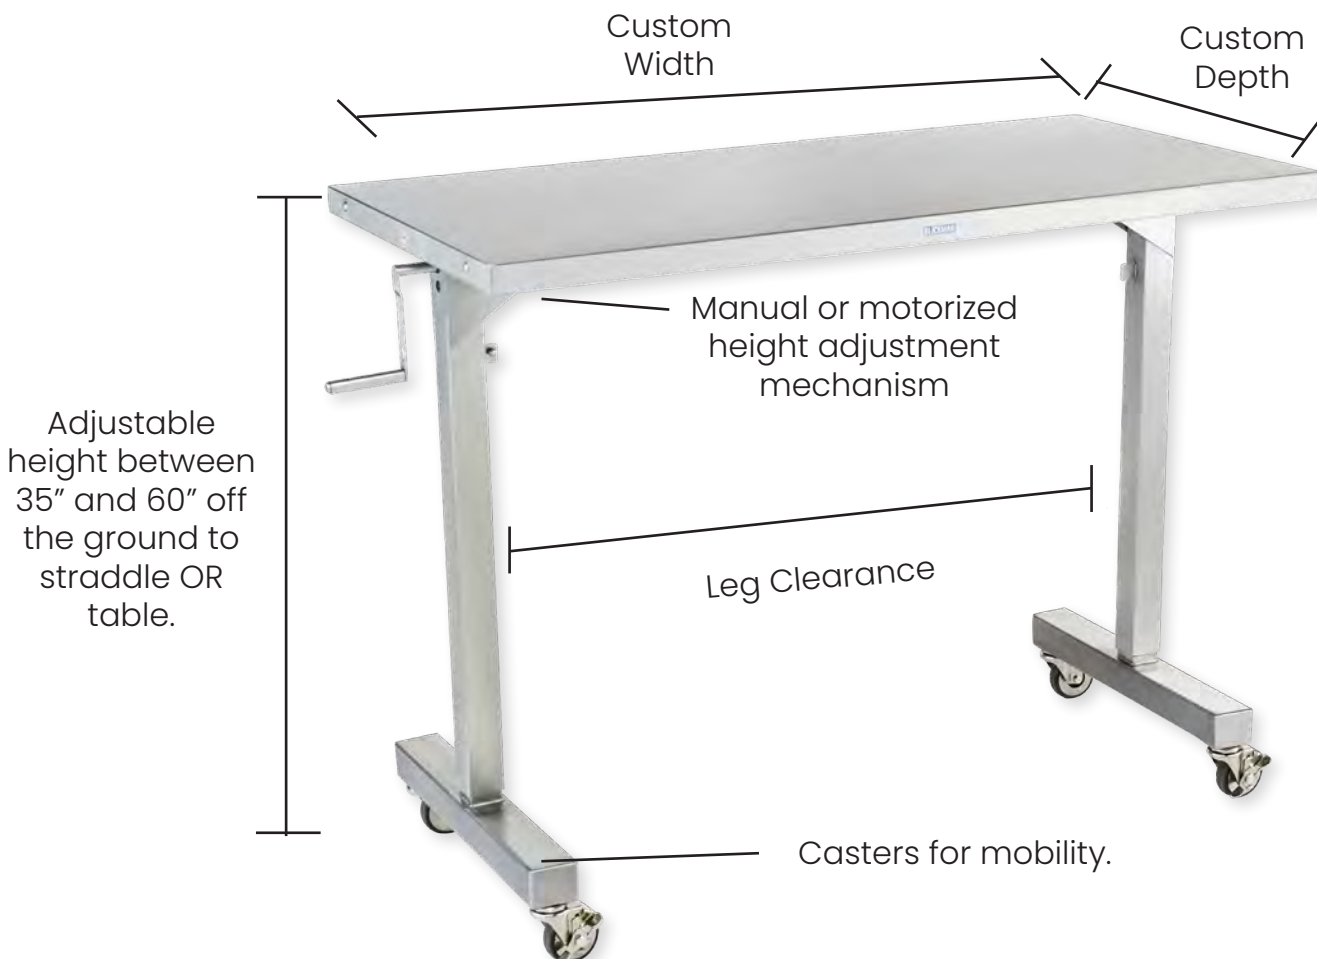

Tables

Adjustable Tables

BACK TABLE

Description: Our specialty back table is designed to provide additional room for extensive surgeries which require a wide array of equipment and instruments. Height adjustment from 46-49" is achievable with either pneumatic assist or manually. The top tier 'hide-away' shelf is angled for easier instrument viewing and holds multiple trays. Tables have sanitary closed tops which help prevent bacterial build up. Sealed reinforcing channels provide rigidity and durability.

Performance Back Table



Manual Back Table



Pneumatic Assist

Model #	Item #	Description	Length	Depth	Height	Overall Adjustable Height	Shipping Weight
BT4830	0364830340	Back Table with 3" Overshelf	48"	30"	34"	46-49"	250 lbs.
BT6030	0366030340	Back Table with 3" Overshelf	60"	30"	34"	46-49"	298 lbs.
BTP6030	036603034P	Back Table Performance with 3" Overshelf	60"	30"	34"	46-49"	360 lbs.
BT7230	0367230340	Back Table with 3" Overshelf	72"	30"	34"	46-49"	345 lbs.
BTP7230	036723034P	Back Table Performance with 3" Overshelf	72"	30"	34"	46-49"	413 lbs.

**All models come standard with 3" casters.*

Custom Dimensions Available Upon Request

Please email us at info@blickman.com


Tables

Adjustable Tables

THE LIBERTY TABLE

Description: Our Liberty table was designed to straddle the OR table with adjustable height mechanisms. It travels effortlessly on antistatic swivel casters with brakes and utilizes a motorized height adjustment mechanism. Use a foot pedal or hand remote to operate the motorized adjustment. Two standard surface area dimensions available.

Customize the surface area dimensions to fit your needs.

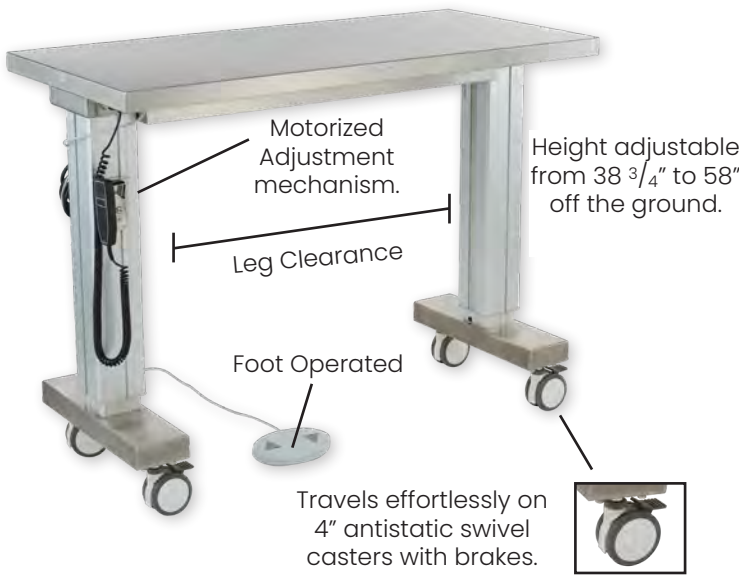

Standard Features



Foot Pedal



Hand Remote

MOTORIZED ADJUSTMENT:

Use the motorized foot operated/hand operated height adjustment mechanism.

Model #	Item #	Description	Width	Depth	Clearance	Shipping Weight
7902SS-M	0157902000	Liberty Table with Adjustable Height 38 3/4-58"	41"	46"	29"	315 lbs.
7901SS-M	0157901000	Liberty Table with Adjustable Height 38 3/4-58"	50 1/2"	24"	38 3/8"	290 lbs.

Custom Dimensions Available Upon Request
Please email us at info@blickman.com

■ Tables

Adjustable Tables

HYDRAULIC INSTRUMENT TABLE

Description: Our hydraulic instrument table includes one lower shelf and is height adjustable to ensure compatibility with multiple OR table heights and healthcare personnel heights. Adjust its height with a manual hand crank from 30" - 42".

Customize the surface area dimensions to fit your needs.



Model #	Item #	Description	Length	Width	Feet	Shipping Weight
7835HYD	0177835000	Hydraulic Table with Adjustable Height 30-42"	48"	24"	Glider Tips	145 lbs.
7836HYD	0177836030	Hydraulic Table with Adjustable Height 30-42"	60"	30"	3" Swivel Casters	188 lbs.

Custom Dimensions Available Upon Request

Please email us at info@blickman.com


Tables

Adjustable Tables

THE GEORGETOWN TABLE

Description: Our Georgetown table was designed to straddle the OR table with a manual hand crank adjustable height mechanism. Height adjustment within ergonomic range between 36" and 56" off the ground. Travels easily on 3" swivel casters with breaks. Two standard surface areas available. Select extended arm design for electrophysiology procedures.

Customize the surface area dimensions to fit your needs.

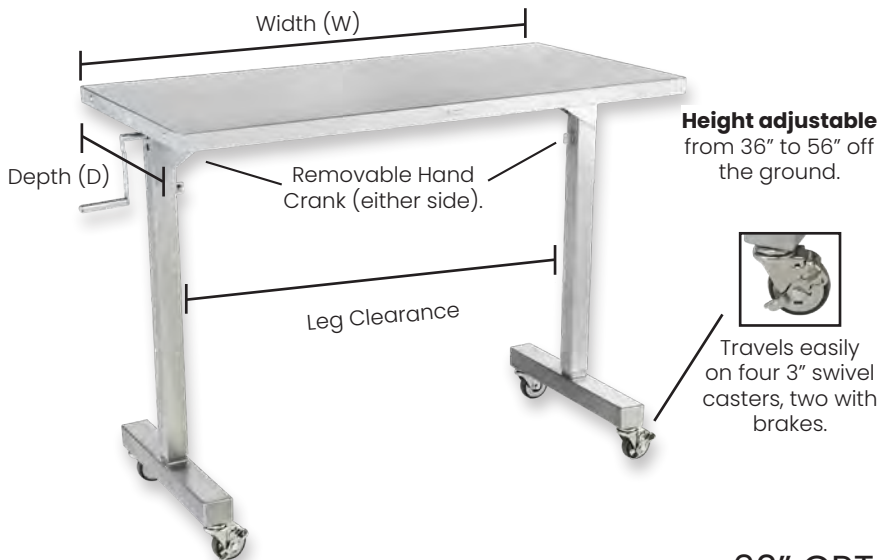

Standard Features




Hand Crank


MANUAL ADJUSTMENT:
Manually adjust the height of this table from either side with a detachable crank handle.

62" CRT table


This Georgetown table with the 14" extended arm was designed for optimizing electrophysiology procedures.




7892SS-0



7895SS-0



7895SS-0 CRT



7896SS-0

Name

Georgetown Table

Model #	Item #	Width	Depth	Leg Clearance	Shipping Weight
7892SS-0	0157892000	36"	20"	28 5/8"	135 lbs.
7895SS-0	0157895000	48"	24"	40 5/8"	160 lbs.
7895SS-0 CRT	0157895062	62"	24"	40"	190 lbs.
7896SS-0	0157896000	34"	46"	26"	175 lbs.

Custom Dimensions Available Upon Request

Please email us at info@blickman.com

Tables

Adjustable Tables

OVERBED TABLE

Description: Our overbed table comes in an attractive mark resistant laminate top in a walnut wood grain. It moves up or down with a simple one touch adjustment. Security features include a built-in column lock and four point base. The table travels smoothly on four 2" hooded casters.

Overbed Table Dimensions
Width: 30" x Height: 30" (max) x Depth: 15 1/2"



Model #	Item #	Description	Width	Depth	Height	Shipping Weight
3400	2833400000	Overbed Table	30"	15 1/2"	30" Max	27 lbs.

Construction Specifications

Universal Dimensions	Adjustable heights to fit over OR table or hospital bed
Materials	304 stainless steel Liberty: Telescoping aluminum lifting columns. Overbed Table: Mar resistant laminate (tray), chrome plate steel (column & base)
Gauge	Liberty: 16GA Top; 11GA Sub Top; 14GA Base Georgetown: 18GA Top; 16GA Sub Top, 2" 16GA square tube legs
Welding	All welding by heliarc method and exposed welds are ground smooth
Finish	Exposed surfaces are free from pit marks, weld seams, scale and are polished with #4 polish to a satin finish
Casters	Liberty: 4" antistatic swivel casters with brakes Georgetown: 3" swivel casters, two with brakes
Notes	Liberty: Motorized adjustment mechanism Electrical Ratings: 100-120VAC, 15AMP, 60 Hz. Georgetown: Manual adjustment mechanism

Shipping Information

All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

Custom Dimensions Available Upon Request
Please email us at info@blickman.com

THE BLICKMAN DIFFERENCE

Stationary Tables

- We offer a variety of stationary tables to fit any healthcare need. Our stationary tables include instrument tables, utility tables, and general work tables. Some models also come in MR conditional equivalents.
- Our instrument tables are reinforced with H-braces for stability or include an optional lower shelf for storing supplies. We offer standard dimensions or that can be customized to any size. We also have an optional nested set of up to six tables that can be ordered together or separately.
- Our utility tables come in a variety of drawer and shelf configurations to store and protect equipment and can include a workspace so you can store and prep your supplies on one efficient and transportable, setup.
- Our work tables are heavy duty with large surface areas designed for use in sterile and non-sterile preparation.

Key Product Features



Tables

Instrument Tables

NESTED TABLES

Description: Our nested instrument tables are space saving alternatives with a unique design that requires a mere 8 square feet of floor space, but yields 31 square feet of usable work space. All tables travel on 3" casters.



Name	Dimensions (WxHxD)	Model #	Item #	Shipping Weight
Complete Set of 6	8 Sq. Ft. of Floor Space 31 Sq. Ft. of Work Space	782ISS	0137821000	255 lbs.

ORDER SEPARATELY

Largest	48" x 42" x 24"	7822SS	0137822000	56 lbs.
Second	44" x 40" x 22"	7823SS	0137823000	52 lbs.
Third	40" x 38" x 20"	7824SS	0137824000	51 lbs.
Fourth	36" x 36" x 18"	7825SS	0137825000	37 lbs.
Fifth	32" x 34" x 16"	7826SS	0137826000	34 lbs.
Smallest	28" x 32" x 14"	7827SS	0137827000	32 lbs.

MR options available, see MR section for more details



Tables

Instrument Tables

HOWARD & SAWYER TABLES

Description: Our instrument tables offer complete 18 gauge, 304 stainless steel construction. They are lightweight, yet extremely durable. Sanitary closed top help prevents bacterial build up. Sealed reinforcing channels provide rigidity. All tables are 34" tall, which is in the safety zone for reduced back stress, and travel on 3" casters. There is a 16" clearance between shelves. Our 4 most common sizes are listed below, however we offer a wide variety of other sizes that you can order by calling our customer service or visiting our website.

Sawyer Table



Howard Table



Table	Sawyer Table			Howard Table		
Dimensions (WxD)	H-Brace			Shelf		
20" x 16"	7840SS	0127840000	28 lbs.	7830SS	0117830000	32 lbs.
30" x 16"	7839SS	0127839000	33 lbs.	7829SS	0117829000	40 lbs.
33" x 18"	7841SS	0127841000	39 lbs.	7831SS	0117831000	47 lbs.
36" x 20"	7842SS	0127842000	42 lbs.	7832SS	0117832000	52 lbs.
36" x 24"	7843SS	0127843000	48 lbs.	7833SS	0117833000	56 lbs.
48" x 20"	7844SS	0127844000	53 lbs.	7834SS	0117834000	66 lbs.
48" x 24"	7845SS	0127845000	56 lbs.	7835SS	0117835000	69 lbs.
60" x 24"	7846SS	0127846000	178 lbs.	7836SS	0117836000	190 lbs.
72" x 24"	7847SS	0127847000	186 lbs.	7837SS	0117837000	210 lbs.

Options: Custom dimensions, 40"H tables, three sided guardrails, and drawers (see Crescent table design).

MR options available, see MR section for more details



ANGULAR INSTRUMENT TABLE

Description: Choose our angular instrument table to have separate left and right work spaces. Add a lower shelf or drawers for additional storage. This 34" tall table is in the safety zone for reduced back stress, and it travels on 3" casters. Select the surface area with dimensions that fit your needs.



Model #	Item #	Description	Width	Depth	Height	Shipping Weight
7862SSA	0147862000	Angular Instrument Table	60"	15"	34"	120 lbs.
7863SSA	0147863000	Angular Instrument Table	72"	18"	34"	137 lbs.

Custom Dimensions Available Upon Request
Please email us at info@blickman.com

Tables

Utility
Tables

UTILITY TABLES

Description: Our utility tables are popular in the OR as anesthesia tables and throughout healthcare facilities as a general utility table. Our superior construction adds a supporting channel underneath the top shelf to enhance its strength. All of our utility tables are 34" tall, which is in the safety zone for reduced back stress, and travel easily on 3" casters.

Shelf Configuration Includes:

- ✓ Two shelves, 17" and 34" off the ground
- ✓ Four sided guardrails for protection

Drawer Configurations Include:

- ✓ A positive stop to prevent accidental drawer removal
- ✓ Ball bearing slides for easy sliding drawers
- ✓ Three sided guardrails for protection (optional four sided guardrails are available)

All of our utility tables are the same dimensions:

Width: 20" x Height: 34" x Depth: 16"



Lower Shelf Clearance:
16"



Lower Shelf Clearance:
11"



Lower Shelf Clearance:
5 1/2"



Lower Shelf Clearance:
4 1/4"



Lowest Drawer Clearance:
11 1/2"

# of Drawers	0	1	2	3	4
Model #	7852SS	7850SS	7754SS	7857SS	7859SS
Item #	0257852000	0217850000	0227754000	0237857000	0247859000
Shipping Weight	32 lbs.	46 lbs.	59 lbs.	72 lbs.	82 lbs.

Options: Feet: glides, rubber tips, or larger diameter casters, four sided guard rails on drawer models

CRESCENT TABLES

Description: Our crescent table has the same construction as the Howard and Sawyer Instrument tables with the addition of drawers and guard rails. This table includes a large work surface area (36"x 20"), two 4" deep drawers and one optional lower shelf 16" off the ground. This model is 34" tall, which is in the safety zone for reduced back stress, and travels easily on 3" casters.

Customize the surface area dimensions of these models to fit your needs.



Model #	Item #	Description	Width	Depth	Height	Shipping Weight
7856SS	0317856000	Crescent Table (H-Brace)	36"	20"	34"	78 lbs.
7856SS-SH	0317856003	Crescent Table (Shelf)	36"	20"	34"	81 lbs.

Options: Feet: glides, rubber tips, or larger diameter casters

WORK TABLES

Description: Our work tables are designed for use as prep tables. They are heavy duty with large surface areas designed for use in sterile and non-sterile environments. The smallest table dimensions use four legs, and all other larger dimensions use six legs. All of our work tables are 36" tall, which is in the safety zone for reduced back stress, and come standard with bullet feet. Rubber tips, casters, and gliders are available as alternative options.

Customize the surface area dimensions of these models to fit your needs.



Model #	Item #	Description	Width	Depth	Height	Shipping Weight
H-Brace						
CSDT6830	0336830000	Work Table	68"	30"	36"	210 lbs.
CSDT8036	0338036000	Work Table	80"	36"	36"	300 lbs.
CSDT9244	0339244000	Work Table	92"	44"	36"	390 lbs.
Shelf						
CSDT6830S1	0336830100	Work Table	68"	30"	36"	260 lbs.
CSDT8036S1	0338036100	Work Table	80"	36"	36"	355 lbs.
CSDT9244S1	0339244100	Work Table	92"	44"	36"	435 lbs.

Options: Feet: glides, rubber tips, or larger diameter casters

Custom Designs Available Upon Request
Please email us at info@blickman.com

STATIONARY TABLE OPTIONS

Drawers

Description: For added storage, add drawers beneath any tabletop.



**contact us for available drawers and sizing*

Guardrails

Description: For added placement security, add guardrails to any tabletop.



Custom Designs Available Upon Request

Please email us at info@blickman.com

Tables

Options

STATIONARY TABLE OPTIONS

Feet Options

Rubber Tips | Casters | Gliders



Custom Designs Available Upon Request
Please email us at info@blickman.com

BLICKMAN



Utility Carts

Convenient transport for medical equipment

Includes:

- Light Duty
- Medium Duty
- Heavy Duty



THE BLICKMAN DIFFERENCE

- Our utility carts are ideal for transporting medical equipment which needs to be used in various areas in your medical facility. We offer light duty, medium duty, and heavy duty options to suit all of your needs.
- Common features include a push handle, open construction for easy access, guardrails for securing contents, and 4" swivel casters for easy maneuverability.
- They contain two or three solid stainless steel shelves to provide ample storage space.
- The stainless steel construction allows for easy cleaning and sanitizing, while resisting corrosion and stains.
- We also offer a folding utility cart with wire baskets for any application such as movement of mail, patient records, and laboratory materials.

Key Product Features



Utility Carts

Light Duty

FOLDING UTILITY CART

Description: Our folding utility cart is versatile enough for any application such as movement of mail, patient records, and laboratory materials. Choose any combination of 6" or 12" deep wire baskets to complete your cart. The metal frame is designed for easy assembly and folds for storage. Rubber stoppers support and protect the wire racks and provide a quiet ride on four, 3" hard rubber casters.

Folding Utility Cart Dimensions:

Width: 29 1/4" x Height: 38 1/2" x Depth: 19 1/2"



6" Wire Basket (2441)

Item #: 2422441000



12" Wire Basket (2442)

Item #: 2422442000

Name	Model #	Item #	Shipping Weight
Kit with 6" + 12" Baskets	2440 KIT	24224400KT	33 lbs.
Kit with Two 6" Baskets	2440 6 KIT	24224401KT	31 lbs.
Kit with Two 12" Baskets	2440 12 KIT	24224402KT	35 lbs.
ORDER SEPARATELY			
Folding Frame	2440	2422440000	21 lbs.
6" Wire Basket	2441	2422441000	5 lbs.
12" Wire Basket	2442	2422442000	6 lbs.

Utility Carts

Light Duty

LIGHT DUTY CARTS

Description: Our versatile light duty cart easily moves records, supplies and equipment throughout your facility. It's made of 20GA stainless steel, has three solid shelves, one push handle with protective rubber bumpers on each corner, travels on four 4" swivel casters and has a weight capacity of 300 lbs. evenly distributed. The top and middle shelves have three edges with 1-1/4" sides and a front open edge to slide equipment in and out with ease. The bottom shelf has four open edges for greater accessibility to equipment stored in a lower position. You can also choose to add additional guardrails or an IV pole attachment.

Our light duty carts have the same dimensions:

Width: 28 1/4" x Height: 35 3/4" x Depth: 16"



Top Shelf: Three Sided Shelf with Open Front Edge
Middle Shelf: Three Sided Shelf with Open Front Edge
Bottom Shelf: Open Shelf



Top Shelf: Three Sided Shelf with Open Front Edge
Middle Shelf: Three Sided Shelf with Front Guardrail
Bottom Shelf: Shelf with Four Guardrails



Top Shelf: Three Sided Shelf with Front Guardrail
Middle Shelf: Three Sided Shelf with Front Guardrail
Bottom Shelf: Shelf with Four Guardrails

Name	Light Duty Utility Cart	Light Duty Utility Cart with 5 Guardrails	Light Duty Utility Cart with 6 Guardrails
Model #	7534SS	7534SS-GR	7534SS-GR4
Item #	2427534002	2427534000	2427534004
Shipping Weight	30 lbs.	30 lbs.	30 lbs.

Options: IV pole attachments.

Custom Designs Available Upon Request
Please email us at info@blickman.com

Utility Carts

Medium/Heavy Duty

MEDIUM DUTY CARTS

Description: Our versatile medium duty carts easily move records, supplies and equipment throughout your facility. They are made of 16GA stainless steel, have three solid shelves with lipped edges on all four sides, travel on four 4" swivel casters and have a weight capacity of 500 lbs. evenly distributed. Choose between our design that includes four sided shelves and width-wise handles or our design that includes open shelving and depth-wise handles. Optional IV pole attachment is available.



Dimensions: 27 1/2" x 40" x 18 1/8"



Dimensions: 25" x 35 3/4" x 16 1/2"

Name	Side Rails Medium Duty Cart	End Rails Medium Duty Cart
Model #	7535SS	7536SS
Item #	2427535000	2427536000
Shipping Weight	47 lbs.	40 lbs.

HEAVY DUTY CART

Description: Our heavy duty cart with angled push handles is made of 16GA stainless steel, has two solid 4-sided shelves, travels on four 5" swivel casters and has a weight capacity of 700 lbs. evenly distributed. Optional IV pole attachment is available.



Dimensions: 41 3/4" x 40" x 19 1/4"

Name	Heavy Duty Cart
Model #	7537SS
Item #	2427537000
Shipping Weight	43 lbs.

Custom Designs Available Upon Request

Please email us at info@blickman.com

MR options available, see MR section for more details.



Utility Carts

Accessories

IV POLE ATTACHMENTS

Description: Our IV pole attachment can fit any Blickman utility cart with ease.



Name	7534SS with IV pole attachment	7535SS with IV pole attachment	7536SS with IV pole attachment	7537SS with IV pole attachment
Model #	7534SS-IV	7535SS-IV	7536SS-IV	7537SS-IV
Item #	2427534001	2427535001	2427536001	2427537001
Shipping Weight	35 lbs.	52 lbs.	45 lbs.	48 lbs.

GUARDRAILS & SIDING

Contact Blickman Customer Service about adding additional siding or guardrails.



Open Shelf



Lipped Shelf



Shelf with 4 Guardrails



3 Sided Shelf

Custom Designs Available Upon Request

Please email us at info@blickman.com

MR options available, see MR section for more details.



Utility Carts

Construction Specifications

Construction Specifications

Dimensions	Light Duty: 28 1/4" W x 35 3/4" H x 16" D Medium Duty: 27 1/2" W x 40" H x 18 1/8" D (Side Rails) 25" W x 35 3/4" H x 16 1/2" D (End Rails) Heavy Duty: 41 3/4" W x 40" H x 19 1/4" D
Materials	Stainless steel Rubber bumper handles on 7534SS Carts
Gauge	Light Duty: 20GA & 18GA Medium/Heavy Duty: 16GA
Welding	All welding by spot and heliarc methods and exposed welds are ground smooth
Finish	Exposed surfaces are free from pit marks, weld seams, scale and are polished with a #4 polish to a satin finish
Casters	Light/Medium Duty: 4" Swivel Casters Heavy Duty: 5" Swivel Casters

Custom Designs Available Upon Request
Please email us at info@blickman.com

Shipping Information

All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

Toll Free: (800) 247-5070
Local: (973) 330-0557

BLICKMAN

www.blickman.com
info@blickman.com

1099 Wall Street West, Suite 250A, Lyndhurst, NJ 07071

BLICKMAN



Warming Cabinets

Keeping patients warm and comfortable

Includes:

- Freestanding
- Under Counter
- Recessed
- Accessories
- Tabletop



THE BLICKMAN DIFFERENCE

- We maintain the broadest line of warming cabinets in the healthcare market. Our blanket and fluid warming cabinets include freestanding, single chamber, dual chamber, tabletop, under-counter, and recessed models (including pass-through versions with doors on front and back).
- All of our models are offered with the choice of glass or stainless steel doors at the same price. Our glass door versions have wide windows designed to allow medical professionals to see all solutions and blankets at a glance, unlike the narrower porthole openings in competing models, so you never come up short of supplies in critical moments.
- Our warming cabinets allow for heat variances between 90° and 160° Fahrenheit. Temperatures remain within $\pm 1^\circ$ Fahrenheit of set point with virtually no leakage into adjoining chambers or outside area.
- The warming fan is located at the top interior of the cabinet allowing for improved heat circulation (no hot/cold spots) and frees up the bottom shelf surface to store more blankets and/or solutions.
- Our touch screen and digital control panels allow O.R. managers to lock the warming cabinet settings with a key or passcode to ensure recommended temperature levels are maintained and that the facility meets all requirements.
- Unlike with cumbersome, "meat locker" handles on competing models, our warming cabinets allow for hands free operation. Our warming cabinets comes standard with self-closing, adjustable tension, magnetic gasket doors. If your arms are full, simply open the door with your elbow and then the door will slowly close on its own.

Key Product Features

Sloped top available for freestanding models to prevent dust collection

Dual chamber models enable you to heat solutions and blankets simultaneously in their respective recommended temperatures

Wide glass window designed to let medical professionals see all solutions and blankets at a glance

Free standing and recessed options available for tall models



Touch Screen Control Panel



Digital Screen Control Panel



Controller Features:

- Touch Screen Panel works just like a smartphone
- Visual/audible alarm
- Calibration due date reminders
- Graphical temperature trend view
- Set Temperature "lock out"
- Lost passcode view
- Temp data recorder/real time clock

Self-closing, magnetic gasket, adjustable tension doors afford convenient, hands free opening and closing

Warming Cabinets

Freestanding

Description: Our freestanding cabinets come in either single or dual chamber configurations with open adjustable shelf design for flexibility and expanded use. The doors come in either glass or stainless steel and lock to secure contents. Each unit comes standard with three perforated stainless steel shelves and integrated casters for ease of mobility.

Dimensions

Width: 30" x Height: 74 1/2" x Depth: 26 5/8"



Electrical: Amps: 7.5 | Total Wattage: 750

Electrical: Amps: 15 | Total Wattage: 1500

Name	Single Chamber		Dual Chamber	
Glass Doors				
Controller Type	Touch Screen	Digital Screen	Touch Screen	Digital Screen
Model #	892ITG	792ITG	8924TG	7924TG
Item # Shipping	14B8921243	14B7921243	14B8924243	14B7924243
Weight	437 lbs.	437 lbs.	500 lbs.	500 lbs.
Solid Doors				
Controller Type	Touch Screen	Digital Screen	Touch Screen	Digital Screen
Model #	892ITS	792ITS	8924TS	7924TS
Item # Shipping	14B8921200	14B7921200	14B8924200	14B7924200
Weight	437 lbs.	437 lbs.	500 lbs.	500 lbs.

Options: No Casters, sloped tops

Warming Cabinets

Recessed

Description: Our recessed warming cabinets are designed for built-in installation. Single chamber glass door, solid door, and passthrough models available. Three perforated stainless steel shelves come standard in these models.

Dimensions

Width: 30" x Height: 60" x Depth: 20 5/8"

Electrical: Amps: 7.5 | Total Wattage: 750



Name	Glass Door		Solid Door		Passthrough	
Controller Type	Touch Screen	Digital Screen	Touch Screen	Digital Screen	Touch Screen	Digital Screen
Model #	SW40TG	SW30TG	SW40TS	SW30TS	SW40TPTGS	SW30TPTGS
Item # Shipping	14BSW40243	14BSW30243	14BSW40200	14BSW30200	14BSW40278	14BSW30278
Weight	320 lbs.	320 lbs.	320 lbs.	320 lbs.	245 lbs.	245 lbs.

Options: Dual chambers, addtional shelves.

Note: Passthrough models are available in the following configurations: glass/glass, solid/solid, glass/solid, or solid/glass.

Warming Cabinets

Under Counter

Description: Our under counter warming cabinet is suited for use in limited spaces. It comes with either glass or stainless steel doors, and comes standard with two adjustable perforated stainless steel shelves.

Dimensions
Width: 30" x Height: 35 1/2" x Depth: 26 5/8"
Electrical: Amps: 7.5 | Total Wattage: 750



Name	Single Chamber			
	Glass Door		Solid Door	
Controller Type	Touch Screen	Digital Screen	Touch Screen	Digital Screen
Model #	8922TG	7922TG	8922TS	7922TS
Item # Shipping	14B8922243	14B7922243	14B8922200	14B7922200
Weight	260 lbs.	260 lbs.	260 lbs.	260 lbs.

Options: Sloped tops

Warming Cabinets

Tabletop

Description: Our tabletop warming cabinets are available in a standard and compact size. They can sit on an existing countertop or on a Blickman mobile stand specifically designed to support our tabletop warmers. They come with either glass or stainless steel doors. One adjustable perforated stainless steel shelf is included in the standard model only.

Dimensions: 30" x x 24 1/2" x 26 5/8"
Electrical: Amps: 7.5 | Total Wattage: 750



Dimensions: 24" x 24 1/2" x 20 5/8"
Electrical: Amps: 3.5 | Total Wattage: 350



Name	Standard		Compact	
Glass Doors				
Controller Type	Touch Screen	Digital Screen	Touch Screen	Digital Screen
Model #	8925TG	7925TG	8927TG	7927TG
Item # Shipping	14B8925243	14B7925243	14B8927243	14B7927243
Weight	215 lbs.	215 lbs.	161 lbs.	161 lbs.
Solid Doors				
Controller Type	Touch Screen	Digital Screen	Touch Screen	Digital Screen
Model #	8925TS	7925TS	8927TS	7927TS
Item # Shipping	14B8925200	14B7925200	14B8927200	14B7927200
Weight	215 lbs.	215 lbs.	161 lbs.	161 lbs.

To set up a solutions only warming cabinet, these units can easily be programmed by the user to heat only between 90°F and 110°F. Options: Sloped tops for 925 models.



Warming Cabinets

Tabletop Mobile Stand



Description: Our warming cabinet mobile stand allows for our tabletop warming cabinets to become mobilized for transport around your medical facility. These tables are designed to fit both our standard or compact tabletop warming cabinet dimensions without taking up any extra floor space. It includes three sides to secure warming cabinet placement and an optional shelf with four guardrails is available for additional storage.

For transportation, wrap warming cabinet cable around cleat on the back of the mobile stand.

Table Dimensions

Width: 30" x Height: 34" x Depth: 26"



Cleat in the back to coil power cord during transport.



Name	H-Brace	Shelf
Model #	3026SSH	3026SS
Item #	0123026100	0113026000
Shipping Weight	40 lbs.	50 lbs.



Warming Cabinets

Accessories & Power Consumption

ACCESSORIES



Item	Description	Shipping Weight
14B3018000	Sloped top (30" x 8" x 18") for warming cabinet SW40	28 lbs.
14B3026000	Sloped top (29 7/8" x 10" x 26") for warming cabinets: 8921, 8922, 8924, 8925	38 lbs.



Item	Description	Shipping Weight
14B8924SHF	Warming Cabinet Shelf Kit 30" x 26" with 1" Diameter holes for 8921, 8922, 8924, 8925	78 lbs.
14B8927SHF	Warming Cabinet Shelf Kit 20" x 17 1/2" for 8927	28 bs.
14BSW40SHF	Warming Cabinet Shelf Kit 30" x 18" for SW40	38 lbs.

POWER CONSUMPTION

Model #	Description	Cubic Feet	KW/Hr.	BTU/Hr.
8921	Single Chamber Tall Warming Cabinet	22.02	0.55	1878
8922	Under Counter Warming Cabinet	9.02	0.35	1195
8924	Dual Chamber Tall Warming Cabinet	18.58	0.78	2664
8925	Standard Tabletop Warming Cabinet	5.05	0.29	990
8927	Compact Tabletop Warming Cabinet	2.87	0.38	1298
SW40	Recessed Warming Cabinet	13.22	0.47	1605



Warming Cabinets

Construction Specifications

Construction Specifications

Standard Dimensions	Free Standing: 30" x 74 1/2" x 26 5/8" Recessed: 30" x 60" x 20 5/8" Table Top: Standard: 30" x 26 5/8" x 24 1/2"; Compact: 24" x 20 5/8" x 24 1/2" Under Counter: 30" x 60" x 20 5/8"
Materials/ Gauge	304 stainless steel 1/4" clear double panel, insulated, tempered sheet glass Perforated Stainless Steel Shelves
Welding	All welding by heliarc method and exposed welds are ground smooth
Finish	Exposed surfaces are free from pit marks, weld seams, scale and are polished with #4 polish to a satin finish
Electrical	Available in standard 100/120 VAC input or 220/240 VAC Units are FDA registered and conform to standards for Safety Medical Electrical Equipment UL 60601I (US) and CSA C22.2 #601.1M90 (Canada) Units are cord connected with a hospital grade cap
Casters	Tall Warming Cabinets: Hidden 3" ball bearing polyolefin casters with zinc finish
Notes	<ul style="list-style-type: none">• TOUCHSCREEN CONTROLLER: LCD display shows actual temperature and set point for each chamber at all times. Control panel components include an On/Off Switch, Keyed Control Temperature Lockout USB port and Touchscreen User Interface.• DIGITAL CONTROLLER: Dual display shows actual temperature and set point for each chamber at all times (each chamber in the double door warmer includes its own digital control system). Control panel components include an ON/OFF Button, UP/DOWN Temperature Touch pad, Alarm Light, Heater Light Indicator, Set/Mute Touch• TEMPERATURE: 90° to 160° Fahrenheit. There is a heater light indicator, digital temperature indicators and an over temperature alarm indicator if the actual temperature exceeds set temperature by 10° Fahrenheit. All units have a visual and audible alarm as well as an automatic safety switch. The units are furnished with tubular heater assemblies and a circulating fan for even heat distribution. From a cold start, a fully loaded cabinet will be heated to the selected temperature in four to six hours.

Shipping Information

All shipping weights are estimates and may be changed without prior notice. Specifications may be improved and dimensions changed without prior notice. Please contact customer service for estimated shipping costs at info@blickman.com.

Contact Us

To place an order or request a quote, go to our website:

<https://www.blickman.com/order-form>

<https://www.blickman.com/request-a-quote-form>

If you have any questions or would like to speak with our customer service department:

Toll Free: (800) 247-5070

Phone: (973) 330-0557

Email: info@blickman.com

Website: www.blickman.com

If you require tech support, please visit our website at **www.blickman.com/tech-support** or email us directly at **techsupport@blickman.com**.

OUR PROMISE

For over 125 years, Blickman has been known throughout the healthcare industry for exceptional product quality. We pride ourselves on providing high-end and personalized service to ensure 100% customer satisfaction. If you are not completely satisfied for any reason, we will make it right. All of our equipment is backed by our Limited Lifetime Warranty, so you can be certain that you have made the very best choice for your healthcare facility.



Explore all we have to offer
www.blickman.com



Corporate Office & Headquarters

1099 Wall Street West
Suite 250
Lyndhurst, NJ
07071