

Pinnacle™ High Capacity Electric Ceiling Lift

Heavy transfers are virtually effortless for patients and caregivers with the Pinnacle™.

The **Pinnacle™ High Capacity Electric Ceiling Lift** raises the bar for ceiling lift standards. The Pinnacle™ features an industry leading lifting capacity of up to 1,000 lbs to allow for the safe transfer of even the heaviest patients, including the ever increasing bariatric population.

A high output lifting motor allows the Pinnacle™ to perform all lifts with one motor rather than expensive, old style dual motor systems. Heavy-duty motors and an all-metal drive train ensures long term reliability and safety. The high capacity batteries allow for more lifts per charge than regular ceiling lifts.

An extra wide, extra long lifting strap provides for maximum safety and convenience. The standard oversize spreader bar helps provide maximum patient comfort.

A long list of integrated safety features protects both caregiver and patient. The Pinnacle's™ superior selection of available sling and track configurations make it the most user-friendly, versatile ceiling lift available anywhere.




The Pinnacle™ features an industry leading lifting capacity of up to 1,000 lbs to allow for the safe transfer of even the heaviest patients, including the ever increasing bariatric population.



Optional wireless hand control – access all iQ Technology™ with convenient digital hand control.



A high output lifting motor allows the Pinnacle™ to perform all lifts with one motor rather than expensive, old style dual motor systems.

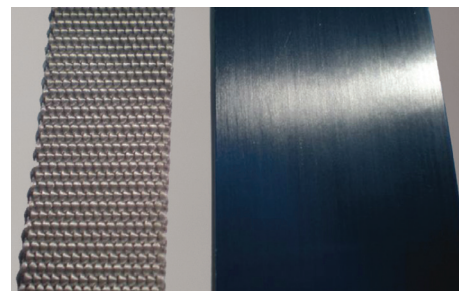

Tollos' Infection Control lifting strap (right) can be wiped down to help prevent transmission of microbes vs. a traditional porous lift strap (left).

Pinnacle™ High Capacity Electric Ceiling Lift

iQ Technology™

Lifting and transferring has never been more intuitive with the integration of iQ Technology™. By utilizing proprietary electronics, mated to a digital readout and optional integrated scale, caregivers and maintenance staff can now track critical lift and service data by the push of a button. Data displayed includes total lifts, total hours, total battery charges, current battery level, total low battery warnings, last/next service plus visual alerts every 1,000 cycles for preventative maintenance.

Optional Integrated Scale

- Optional integrated scale saves up to 12 inches of lighting height and 40% cost versus external scale
- Eliminates maintenance including replacing batteries on external scale

Optional Hand Control with Digital Read-Out

- Access all iQ Technology™ with convenient digital hand control
- Access patient weight if using integrated scale
- Optional wireless hand control

Features

- Lifting capacity up to 1000 lbs
- Extra-wide lifting strap for added safety and convenience
- Oversize spreader bar for safety and comfort
- 2 or 4 function hand controller
- 6-point spreader bar
- Power traverse
- Additional set of on-board controls
- Digital weighscale option

TECHNICAL SPECIFICATIONS

Power Source:	2 x 12VSLA Batteries, 4.5AH
Safe Working Load:	Model 800/800M: 800 lbs (364 kgs) Model 1000/1000M: 1000lbs (454bgs)
Height:	4.5" (11.4 cm)
Width:	12.5" (31.75 cm)
Length:	12.5" (31.75 cm)
Spreader Bar:	Six point with auto leveling side bars
Lifting Strap Width:	2" (5 cm)
Lifting Strap Length:	8' (243 cm)
Charger:	120VAC/24VDC/CSA/UL Approved
Lifting Motor:	24VDC
Lifting Motor Drive System:	Direct drive gear
Overall Weight:	30 lb (13.6 kg)
Charging:	End of Track
Emergency Stop:	Standard
Visual Battery Indicator:	Standard
Audio Low Battery Indicator:	Standard
Emergency Lowering:	Standard
Slack Strap Detector:	Standard
Angle Detector Cutout Switch:	Standard
Anti Free Wheel Safety System:	Standard
Up Limit Switch:	Standard
Down Limit Switch:	Standard
Remote Hand Controller:	Standard
Warranty:	1 Year
Integrated Weigh Scale:	Optional
Compliant with:	CSA-Z10535-03